


CD4543B BCD-to-7-Segment Latch/Decoder/Driver for Liquid Crystals

Features

- Wide supply voltage:3.0V to 18V
- range High noise immunity:0.45 V_{DD} (typ.)
- Low power TTL Compatibility:Fan out of 2 driving 74L or 1 driving 74LS
- Low power dissipation:50 nA/package (typ.) at V_{DD} =5.0V
- Latch storage
- Blanking input
- Blank for all illegal inputs
- Direct-drive LCD, LED and VF displays
- Pin-for-pin replacement for CD4056B (with pin 7 tied to V_{ss})
- Pin-for-pin replacement for Motorola MC14543B

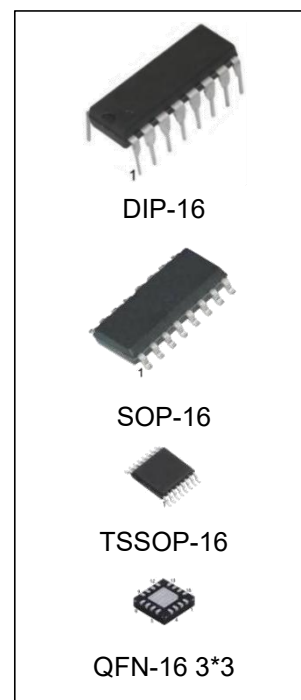

Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
CD4543BE/ CD4543BN	DIP-16	CD4543B	TUBE	1000pcs/box
CD4543BM/TR	SOP-16	CD4543B	REEL	2500pcs/reel
CD4543BMT/TR	TSSOP-16	CD4543B	REEL	2500pcs/reel
CD4543BLQ/TR	QFN-16 3*3	4543B	REEL	5000pcs/reel

General Description

The CD4543BM is a monolithic CMOS BCD-to-7-segment latch/decoder/driver for use with liquid crystal and other types of displays. The circuit provides the functions of a 4-bit storage latch and an 8421 BCD-to-7-segment decoder and driver. The device has the capability to invert the logic levels of the output combination. The phase(Ph), blanking (BI) and latch disable (LD) inputs are used to reverse the truth table phase, blank the display, and store a BCD code, respectively. For liquid crystal(LC) readouts, a square wave is applied to the Ph input of the circuit and the electrically common backplane of the display, and the outputs of the circuit are connected directly to the segments of the LC readout. For other types of readouts, such as light emitting diode (LED), incandescent, gas discharge, and fluorescent readouts, connection diagrams are given on this data sheet.


All inputs are protected against static discharge by diode clamps to V_{DD} and V_{SS} .

Applications


- Instrument (e.g., counter, DVM, etc.) display driver
- Computer/calculator display driver
- Cockpit display driver
- Various clock, watch, and timer users

Pin Configuration


DIP-16/SOP-16/TSSOP-16

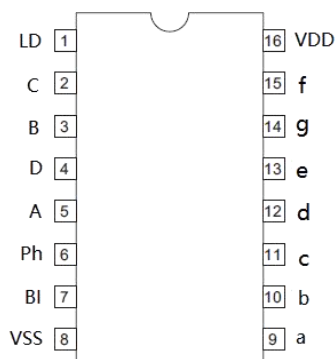

QFN-16 3*3

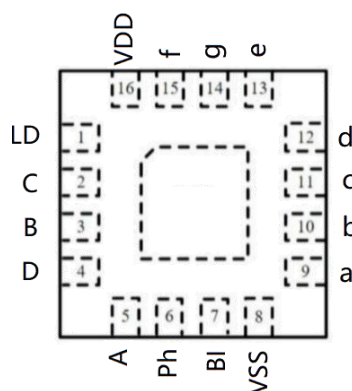

Connection Diagram

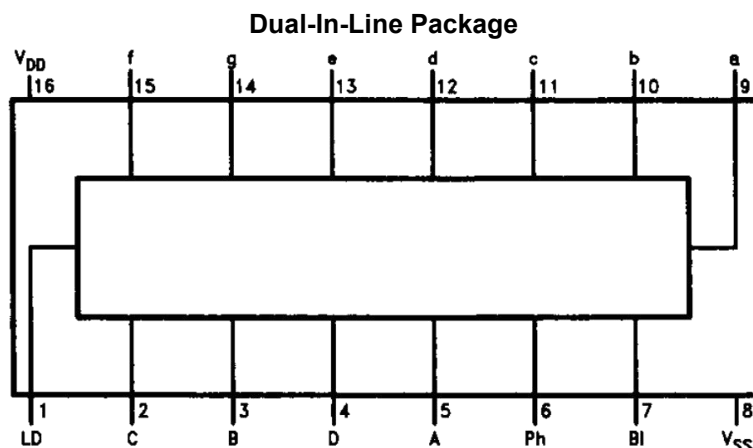

Truth Table

inputs							Outputs							Display
LD	BI	Ph*	D	C	B	A	a	b	c	d	e	f	g	
X	1	0	X	X	X	X	0	0	0	0	0	0	0	Blank
1	0	0	0	0	0	0	1	1	1	1	1	1	0	0
1	0	0	0	0	0	1	0	1	1	0	0	0	0	1
1	0	0	0	0	1	0	1	1	0	1	1	0	1	2
1	0	0	0	0	1	1	1	1	1	1	0	0	1	3
1	0	0	0	1	0	0	0	1	1	0	0	1	1	4
1	0	0	0	1	0	1	1	0	1	1	0	1	1	5
1	0	0	0	1	1	0	1	0	1	1	1	1	1	6
1	0	0	0	1	1	1	1	1	1	1	0	0	0	7
1	0	0	1	0	0	0	1	1	1	1	1	1	1	8
1	0	0	1	0	0	1	1	1	1	1	0	1	1	9
1	0	0	1	0	1	0	0	0	0	0	0	0	0	Blank
1	0	0	1	0	1	1	0	0	0	0	0	0	0	Blank
1	0	0	1	1	0	0	0	0	0	0	0	0	0	Blank
1	0	0	1	1	0	1	0	0	0	0	0	0	0	Blank
1	0	0	1	1	1	0	0	0	0	0	0	0	0	Blank
1	0	0	1	1	1	1	0	0	0	0	0	0	0	Blank
0	0	0	X	X	X	X	* *							* *
†	†	1	†				Inverse of Output Combinations Above							Display As Above

X = Don't care

† = Above combinations

* =For liquid crystal readouts, apply a square wave to Ph.

For common cathode LED readouts, select Ph = 0.

For common anode LED readouts, select Ph = 1.

* * =Depends upon the BCD code previously applied when LD = 1.

Display Format



Absolute Maximum Ratings (Notes 1&2)

Condition		Min	Max	UNITS
DC Supply Voltage(V_{DD})		-0.5	+18	V_{DC}
Input Voltage (V_{IN})		-0.5	$V_{DD}+0.5$	V_{DC}
Storage Temp. Range(T_s)		-65	+150	$^{\circ}C$
Power Dissipation (P_D)	Dual-In-Line	700		mW
	Small Outline	500		mW
Lead Temperature(T_L) (Soldering, 10 seconds)		260		$^{\circ}C$

Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured.

Recommended Operating Conditions (Note 2)

Condition		Min	Max	UNITS
DC Supply Voltage(V_{DD})		3	15	V_{DC}
Input Voltage (V_{IN})		0	V_{DD}	V_{DC}
Operating Temperature Range (T_A)		-40	+85	$^{\circ}C$

DC Electrical Characteristics (Note 2)

Symbol	Parameter	Conditions	-40 $^{\circ}C$		+25 $^{\circ}C$			+85 $^{\circ}C$		Units
			Min	Max	Min	Typ	Max	Min	Max	
I_{DD}	Quiescent Device Current	$V_{DD}=5V, V_{IN}=V_{DD}$ or V_{SS}	-	20	-	-	20	-	150	μA
		$V_{DD}=10V, V_{IN}=V_{DD}$ or V_{SS}	-	40	-	-	40	-	300	
		$V_{DD}=15V, V_{IN}=V_{DD}$ or V_{SS}	-	80	-	-	80	-	600	
V_{OL}	Low Level Output Voltage	$V_{DD}=5V$	-	0.05	-	0	0.05	-	0.05	V
		$V_{DD}=10V, I_{OL}<1\mu A$	-	0.05	-	0	0.05	-	0.05	
		$V_{DD}=15V$	-	0.05	-	0	0.05	-	0.05	
V_{OH}	High Level Output Voltage	$V_{DD}=5V$	4.95	-	4.95	5	-	4.95	-	V
		$V_{DD}=10V, I_{OL}<1\mu A$	9.95	-	9.95	10	-	9.95	-	
		$V_{DD}=15V$	14.95	-	14.95	15	-	14.59	-	
V_{IL}	Low Level Input Voltage	$V_{DD}=5V, V_O=0.5V$ or $4.5V$	-	1.5	-	-	1.5	-	1.5	V
		$V_{DD}=10V, V_O=1V$ or $9V$	-	3.0	-	-	3.0	-	3.0	
		$V_{DD}=15V, V_O=1.5V$ or $13.5V$	-	4.0	-	-	4.0	-	4.0	
V_{IH}	High Level Input Voltage	$V_{DD}=5V, V_O=0.5V$ or $4.5V$	3.5	-	3.5	-	-	3.5	-	V
		$V_{DD}=10V, V_O=1V$ or $9V$	7.0	-	7.0	-	-	7.0	-	
		$V_{DD}=15V, V_O=1.5V$ or $13.5V$	11.0	-	11.0	-	-	11.0	-	
I_{OL}	Low Level Output Current (Note 3)	$V_{DD}=5V, V_O=0.4V$	0.52	-	0.51	-	-	0.36	-	mA
		$V_{DD}=10V, V_O=0.5V$	1.3	-	1.3	-	-	0.9	-	
		$V_{DD}=15V, V_O=1.5V$	3.6	-	3.4	-	-	2.4	-	
I_{OH}	High Level Output Current (Note 3)	$V_{DD}=5V, V_O=4.6V$	-0.52	-	-0.44	-	-	-0.36	-	mA
		$V_{DD}=10V, V_O=9.5V$	-1.3	-	-1.1	-	-	-0.9	-	
		$V_{DD}=15V, V_O=13.5V$	-3.6	-	-3.0	-	-	-2.4	-	
I_{IN}	Input Current	$V_{DD}=15V, V_{IN}=0V$	-	-0.3	-	-10^{-5}	-0.3	-	-1.0	μA
		$V_{DD}=15V, V_{IN}=15V$	-	0.3	-	10^{-5}	0.3	-	1.0	

AC Electrical Characteristics* $T_A=25^{\circ}\text{C}$, $C_L=50\text{ pF}$, $V_{SS}=0$, unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_r	Output Rise Time	VDD=5V VDD=10V VDD=15V	-	100 50 40	200 100 80	ns
t_f	Output Fall Time	VDD=5V VDD=10V VDD=15V	-	100 50 40	200 100 80	ns
t_{PLH}	Turn-ON Propagation Delay Time	VDD=5V VDD=10V VDD=15V	-	450 170 110	1100 440 330	ns
t_{PHL}	Turn-OFF Propagation Delay Time	VDD=5V VDD=10V VDD=15V	-	500 180 120	1100 440 330	ns
t_{SET-UP}	Set-Up Time	VDD=5V VDD=10V VDD=15V	-	-5 -2 0	80 30 20	ns
t_{HOLD}	Hold Time	VDD=5V VDD=10V VDD=15V	-	30 20 15	120 45 30	ns
PW_{LD}	Latch Disable Pulse Width	VDD=5V VDD=10V VDD=15V	-	50 30 20	250 100 80	ns
C_{IN}	Input Capacitance	Per input	-	5	7.5	pF
C_{PD}	Power Dissipation Capacitance	See C _{po} Measurement Waveforms (Note 4)	-	300	-	pF

* AC Parameters are guaranteed by DC correlated testing.


Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The tables of "Recommended Operating Conditions" and "Electrical Characteristics" provide conditions for actual device operation.

Note 2: $V_{SS}=0\text{V}$ unless otherwise specified.

Note 3: I_{OH} and I_{OL} are tested one output at a time.


Note 4: C_{PD} determines the no load AC power consumption of a CMOS device. For a complete explanation, see "MM54C/74C Family Characteristics" Application Note AN-90.

Logic Diagram

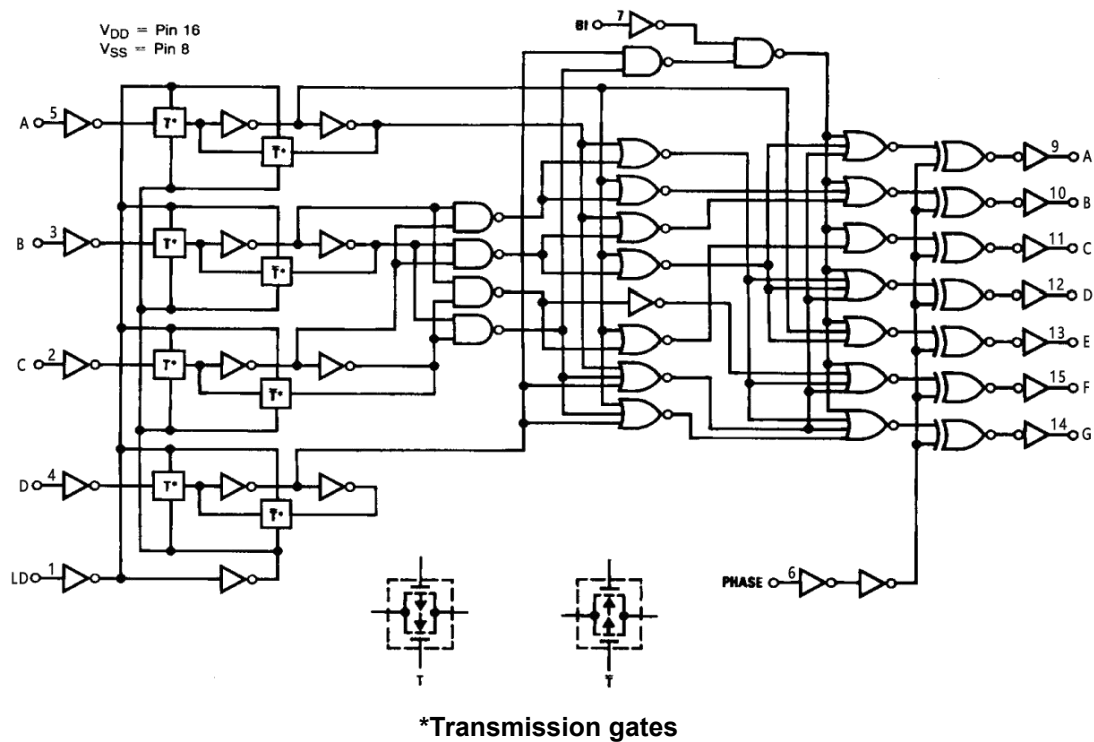


Typical Applications


Liquid Crystal (LC) Readout

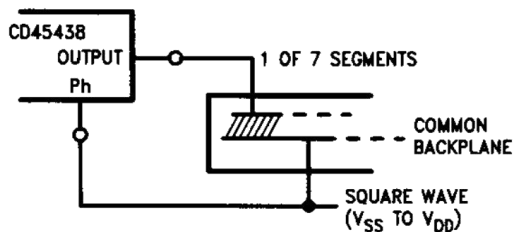

Incandescent Readout

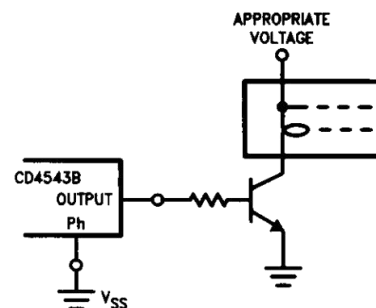


Light Emitting Diode (LED) Readout

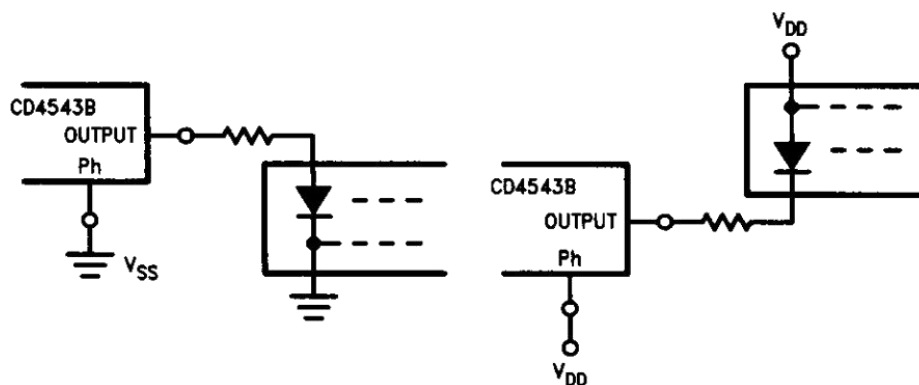


Note: Bipolar transistors may be added for gain (for $V_{DD} \leq 10V$ or $I_{OUT} \geq 10\text{ mA}$)

Typical Applications(Continued)


Fluorescent Readout

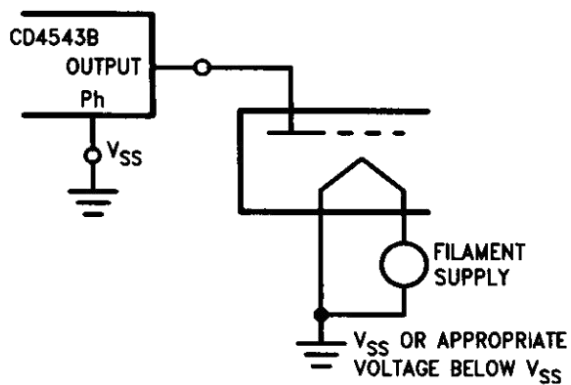

Gas Discharge Readout

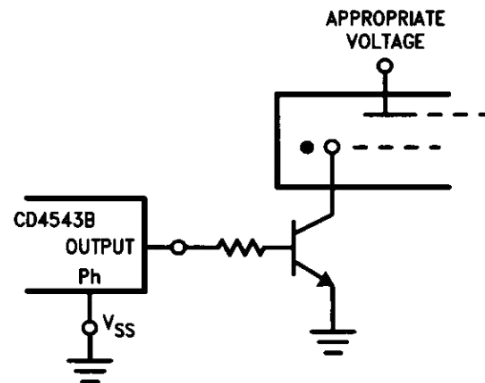


3½-Digit DVM with LCD Display

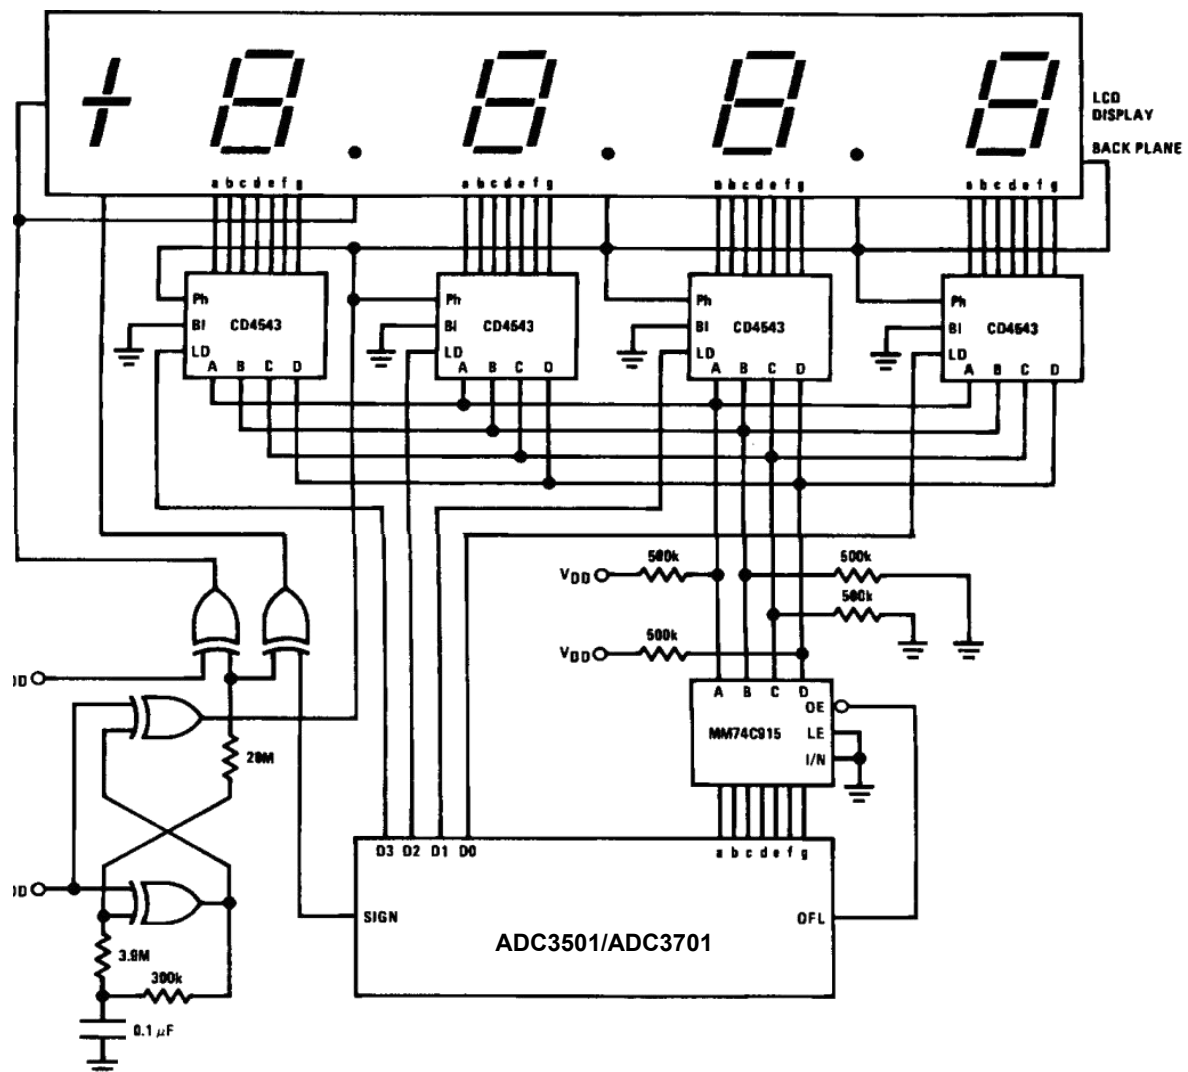

Display 9.999 when overflowed. All digits can also be blanked at overflow by typing OFL to BI on the CD4543's.


Switching Time Waveforms

Cpo Measurement Waveforms

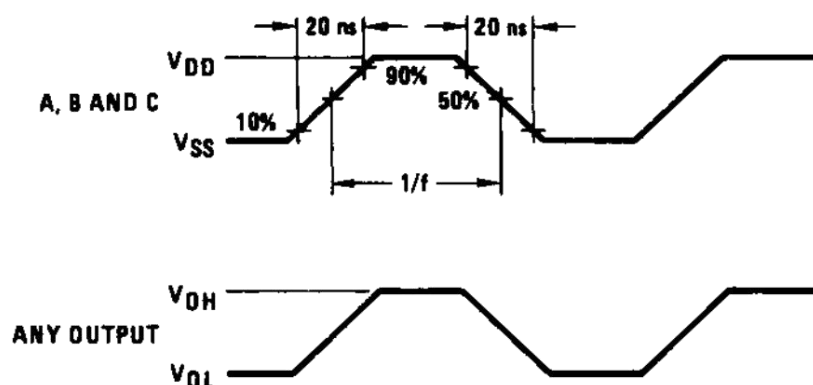


Inputs Bland Ph low, and inputs D and LD high. f in respect to a system clock.
All outputs connected to respective C loads.


Dynamic Signal Waveforms

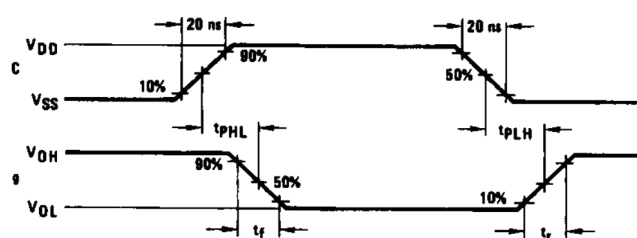

Inputs D, Ph and BI Low, and Inputs A, B and LD High

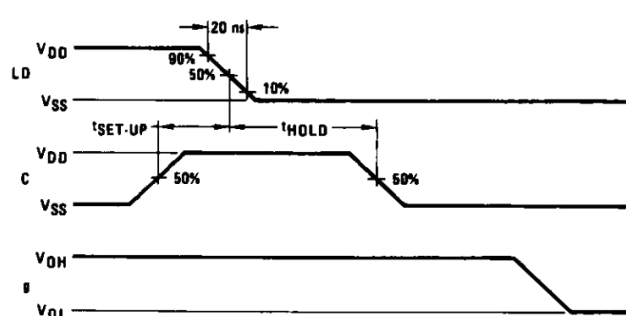


(Inputs D, Ph and BI Low, and inputs A and B Hi

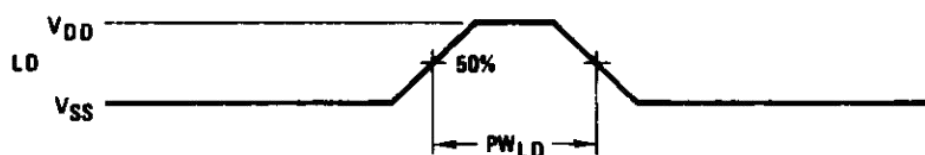

Data DCBA Strobe into Latches


Physical Dimensions

SOP-16

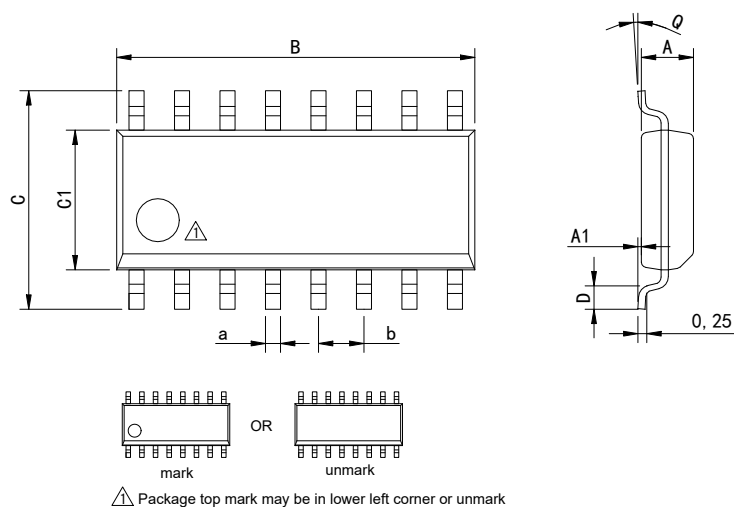

Dimensions In Millimeters(SOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	9.80	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	10.0	6.20	4.00	0.80	8°	0.45	


DIP-16

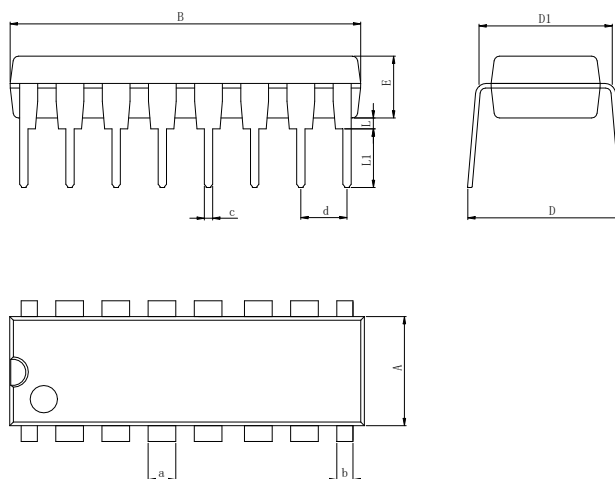

Dimensions In Millimeters(DIP-16)											
Symbol:	A	B	D	D1	E	L	L1	a	b	c	d
Min:	6.10	18.94	8.10	7.42	3.10	0.50	3.00	1.50	0.85	0.40	2.54 BSC
Max:	6.68	19.56	10.9	7.82	3.55	0.70	3.60	1.55	0.90	0.50	

Physical Dimensions


TSSOP-16

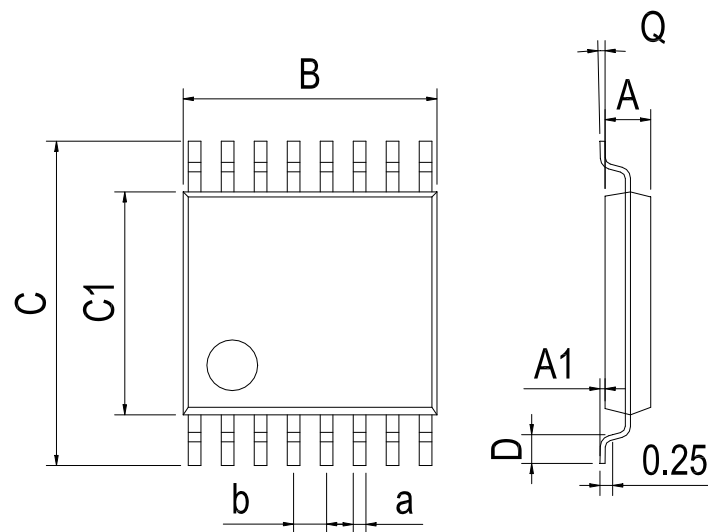

Dimensions In Millimeters(TSSOP-16)

Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	0.85	0.05	4.90	6.20	4.30	0.40	0°	0.20	0.65 BSC
Max:	0.95	0.20	5.10	6.60	4.50	0.80	8°	0.25	

QFN-16 3*3

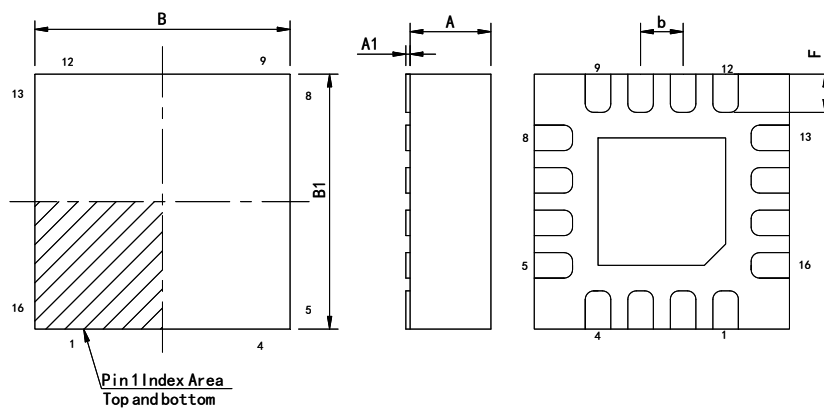

Dimensions In Millimeters(QFN-16 3*3)

Symbol:	A	A1	B	B1	E	F	a	b
Min:	0.85	0	2.90	2.90	0.15	0.25	0.18	0.50TYP
Max:	0.95	0.05	3.10	3.10	0.25	0.45	0.30	

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2014-8	New	1-12
V1.1	2017-1	Modify the package dimension diagram TSSOP-16、Updated DIP-16 dimension	9、 12
V1.2	2020-3	Update encapsulation type、 Update DIP Package New Model	1
V1.3	2024-11	Add the QFN-16 package device、 Update Lead Temperature	1、 4
V1.4	2025-11	Update important statements、 Update SOP-16 Dimension drawing	9、 12

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.