


BCD-to-Decimal Decoder

Features

- Wide supply voltage range: 3.0V to 15V
- High noise immunity: 0.45 VDD (typ.)
- Low power TTL compatibility: fan out of 2 driving 74L or 1 driving 74LS
- Low power
- Glitch free outputs
- “Positive logic” on inputs and outputs

Applications

- Code conversion
- Address decoding
- Indicator-tube decode

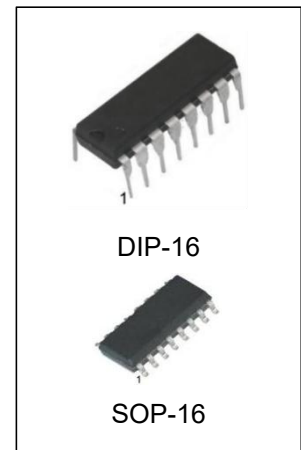

Ordering Information


DEVICE	Package Type	MARKING	Packing	Packing Qty
CD4028BE/ CD4028BN	DIP-16	CD4028B	TUBE	1000pcs/box
CD4028BM/TR	SOP-16	CD4028B	REEL	2500pcs/reel

General Description

The CD4028B is a BCD to decimal or binary-to-octal decoder consisting of 4 inputs, decoding logic gates, and 10 output buffers. A BCD code applied to the 4 inputs, A, B, C, and D, results in a high level at the selected 1-of-10 decimal decoded outputs. Similarly, a 3-bit binary code applied to inputs A, B, and C is decoded in octal at outputs 0–7. A high level signal at the D input inhibits octal decoding and causes outputs 0–7 to go LOW.

All inputs are protected against static discharge damage by diode clamps to VDD and VSS.


Connection Diagram

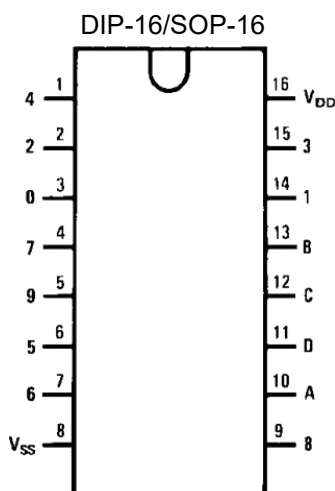

Truth Table

		D	C	B	A	0	1	2	3	4	5	6	7	8	9	BCD States
1 0	HIGH Level	0	0	0	0	1	0	0	0	0	0	0	0	0	0	
		0	0	0	1	0	1	0	0	0	0	0	0	0	0	
		0	0	1	0	0	0	1	0	0	0	0	0	0	0	
		0	0	1	1	0	0	0	1	0	0	0	0	0	0	
		0	1	0	0	0	0	0	0	1	0	0	0	0	0	
		0	1	0	1	0	0	0	0	0	1	0	0	0	0	
		0	1	1	0	0	0	0	0	0	0	1	0	0	0	
		0	1	1	1	0	0	0	0	0	0	0	1	0	0	
	LOW Level	1	0	0	0	0	0	0	0	0	0	0	0	1	0	
		1	0	0	1	0	0	0	0	0	0	0	0	0	1	
		1	0	1	0	0	0	0	0	0	0	0	0	1	0	Extraordinary States
		1	0	1	1	0	0	0	0	0	0	0	0	0	1	
		1	1	0	0	0	0	0	0	0	0	0	0	1	0	
		1	1	0	1	0	0	0	0	0	0	0	0	0	1	
		1	1	1	0	0	0	0	0	0	0	0	0	1	0	
		1	1	1	1	0	0	0	0	0	0	0	0	0	1	

Logic Diagram

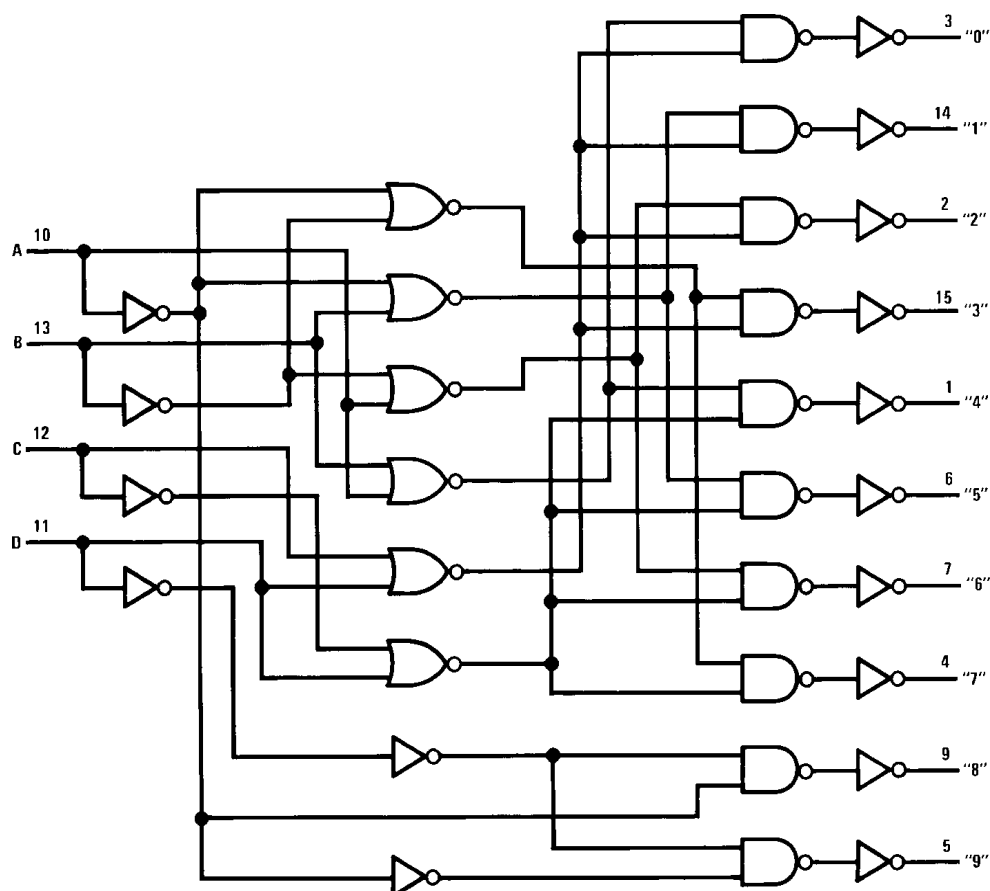

Absolute Maximum Ratings

CONDITION		MIN	MAX
Supply Voltage (VDD)		-0.5V	+18V
Input Voltage (VIN)		-0.5V	Vdd+0.5V
Storage Temperature Range (TS)		-65°C	+150°C
Power Dissipation (PD)	Dual-In-Line	700 mW	
	Small Outline	500 mW	
Lead Temperature(Soldering, 10 seconds)		260°C	

Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured.

Recommended Operating Condiyions

CHARACTERISTIC	Min.	Max.	Units
Supply Voltage (V _{DD})	3	15	V
Input Voltage (V _{IN})	0	V _{DD}	V
Operating Temperature Range (T _A)	-40	+85	°C

Note 1: “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed, they are not meant to imply that the devices should be operated at these limits. The table of “Recom- mended Operating Conditions” and “Electrical Characteristics” provides conditions for actual device operation.

Note 2: V_{SS} = 0V unless otherwise specified.

DC Electrical Characteristics (Note 2)

Symbol	Parameter	Conditions	40°C		25°C			85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I _{DD}	Quiescent Device Current	V _{DD} = 5V, V _{IN} = V _{DD} or V _{SS}		20		0.01	20		150	μA
		V _{DD} = 10V, V _{IN} = V _{DD} or V _{SS}		40		0.01	40		300	μA
		V _{DD} = 15V, V _{IN} = V _{DD} or V _{SS}		80		0.02	80		600	μA
V _{OL}	LOW Level Output Voltage	I _O < 1 μA, V _{IL} = 0V, V _{IH} = V _{DD}		0.05		0	0.05		0.05	V
		V _{DD} = 5V		0.05		0	0.05		0.05	V
		V _{DD} = 10V		0.05		0	0.05		0.05	V
V _{OH}	HIGH Level Output Voltage	I _O < 1 μA, V _{IL} = 0V, V _{IH} = V _{DD}	4.95		4.95	5		4.95		V
		V _{DD} = 5V	9.95		9.95	10		9.95		V
		V _{DD} = 10V	14.95		14.95	15		14.95		V
V _{IL}	LOW Level Input Voltage	I _O < 1 μA		1.5		2.25	1.5		1.5	V
		V _{DD} = 5V, V _O = 0.5V or 4.5V		3.0		4.5	3.0		3.0	V
		V _{DD} = 10V, V _O = 1V or 9V		4.0		6.75	4.0		4.0	V
V _{IH}	HIGH Level Input Voltage	I _O < 1 μA	3.5		3.5			3.5		V
		V _{DD} = 5V, V _O = 0.5V or 4.5V	7.0		7.0			7.0		V
		V _{DD} = 10V, V _O = 1V or 9V	11.0		11.0			11.0		V
I _{OL}	LOW Level Output Current (Note 3)	V _{IH} = V _{DD} , V _{IL} = 0V	0.52		0.44	0.88		0.36		mA
		V _{DD} = 5V, V _O = 0.4V	1.3		1.1	2.2		0.9		mA
		V _{DD} = 10V, V _O = 0.5V	3.6		3.0	6.0		2.4		mA
I _{OH}	HIGH Level Output Current (Note 3)	V _{IH} = V _{DD} , V _{IL} = 0V	-0.2		-0.16	-0.32		-0.12		mA
		V _{DD} = 5V, V _O = 4.6V	-0.5		-0.4	-0.8		-0.3		mA
		V _{DD} = 10V, V _O = 9.5V	-1.4		-1.2	-3.5		-1.0		mA
I _{IN}	Input Current	V _{DD} = 5V, V _{IN} = 0V		-0.3			-0.3		-1.0	μA
		V _{DD} = 15V, V _{IN} = 15V		-0.3			-0.3		-1.0	μA

Note 3: I_{OL} and I_{OH} are tested one output at a time.


AC Electrical Characteristics (Note 4)

TA = 25°C, CL = 50 pF, RL = 200k, Input tr = tf = 20 ns, unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
tPHL or tPLH	Propagation Delay Time	VCC = 5V		240	480	ns
		VCC = 10V		100	200	ns
		VCC = 15V		70	140	ns
tTHL or tTLH	Transition Time	VCC = 5V		175	350	ns
		VCC = 10V		75	150	ns
		VCC = 15V		60	110	ns
CIN	Input Capacitance	Any Input		5	7.5	pF


Note 4: AC Parameters are guaranteed by DC correlated testing.

Witching Time Waveforms

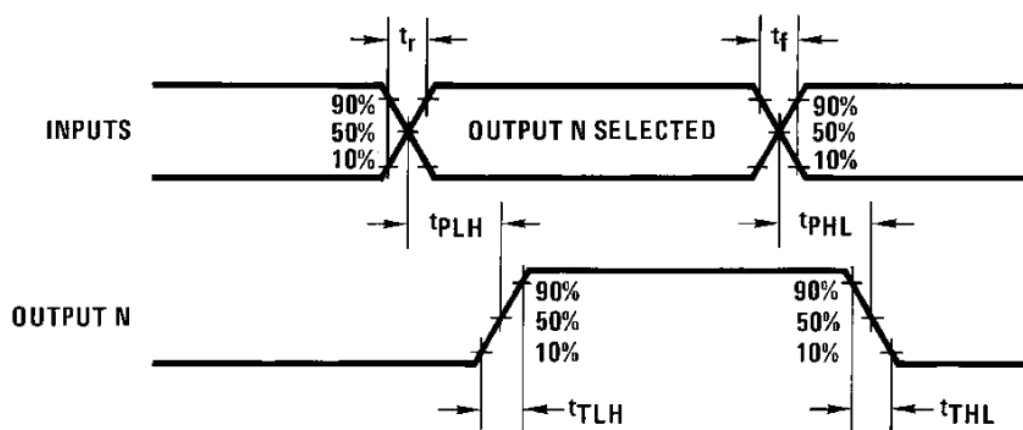


Physical Dimensions

SOP-16

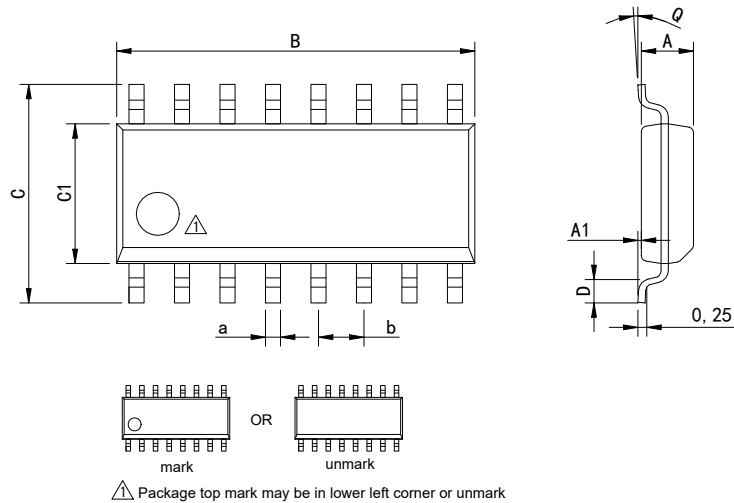

Dimensions In Millimeters(SOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	9.80	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	10.0	6.20	4.00	0.80	8°	0.45	

DIP-16

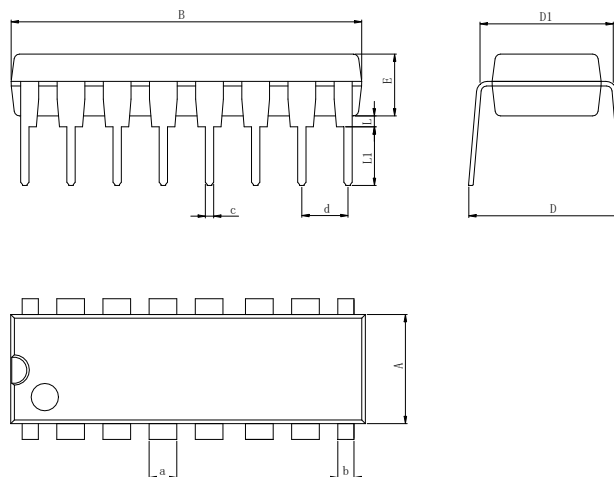

Dimensions In Millimeters(DIP-16)											
Symbol:	A	B	D	D1	E	L	L1	a	b	c	d
Min:	6.10	18.94	8.10	7.42	3.10	0.50	3.00	1.50	0.85	0.40	2.54 BSC
Max:	6.68	19.56	10.9	7.82	3.55	0.70	3.60	1.55	0.90	0.50	

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2011-9	New	1-8
V1.1	2015-11	Update encapsulation type、Updated DIP-16 dimension、Update DIP Package New Model	1、 6
V1.2	2019-8	Add annotation for Maximum Ratings	3
V1.3	2024-10	Update Lead Temperature	3
V1.4	2025-11	Update important statements、Update SOP-16 Dimension drawing	6

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.