


LM285 Adjustable Micropower Voltage References

FEATURES

- Adjustable from 1.24V to 5.30V
- Operating Current of 10μA to 20mA
- 1% and 2% Initial Tolerance
- 1Ω Dynamic Impedance
- Low Temperature Coefficient

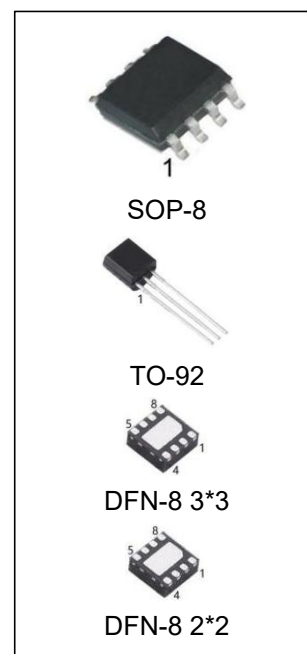

ORDERING INFORMATION

DEVICE	Package Type	MARKING	Packing	Packing Qty
LM285Z-ADJ/HG	TO-92	LM285-ADJ,285-ADJ	BAG	1000pcs/box
LM285M-ADJ/TR-HG	SOP-8	285-ADJ	REEL	2500pcs/reel
LM285DQ3-ADJ/TR-HG	DFN-8 3*3	285-ADJ	REEL	5000pcs/reel
LM285DQ2-ADJ/TR-HG	DFN-8 2*2	285-ADJ	REEL	5000pcs/reel

DESCRIPTION

The LM285-ADJ are micro power 3-terminal adjustable band-gap voltage reference diodes. Operating from 1.24 to 5.3V and over a 10μA to 20mA current range, they feature exceptionally low dynamic impedance and good temperature stability. On-chip trimming is used to provide tight voltage tolerance. Since the LM285-ADJ band-gap reference uses only transistors and resistors, low noise and good long-term stability result. The wide dynamic operating range allows its use with widely varying supplies with excellent regulation.

The extremely low power drain of the LM285-ADJ makes it useful for micro power circuitry. This voltage reference can be used to make portable meters, regulators or general purpose analog circuitry with battery life approaching shelf life. Further, the wide operating current allows it to replace older references with a tighter tolerance part.

CONNECTION DIAGRAM




Figure 1. TO-92 Package Bottom View

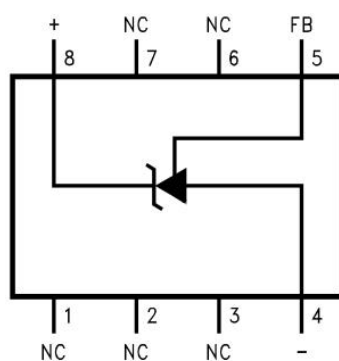


Figure 2. SOP Package Top View


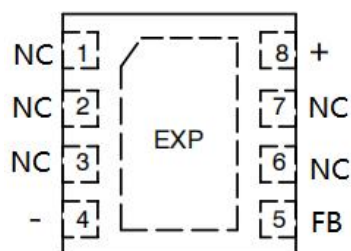


Figure 3. DFN Package Top View

BLOCK DIAGRAM

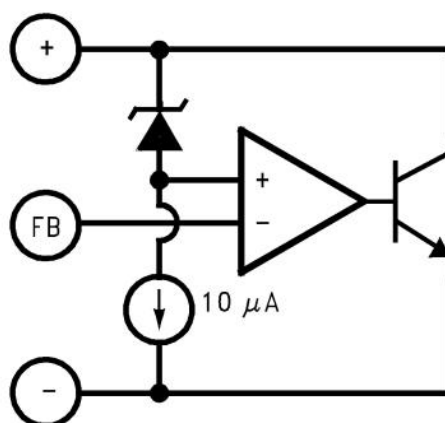

Typical Applications

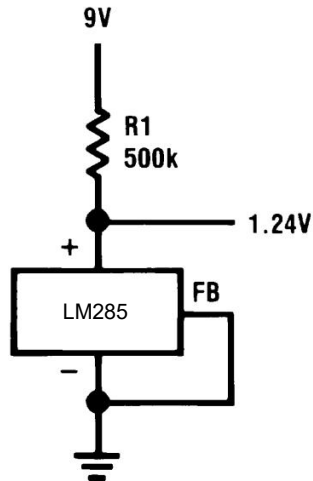


Figure 3. 1.2V Reference

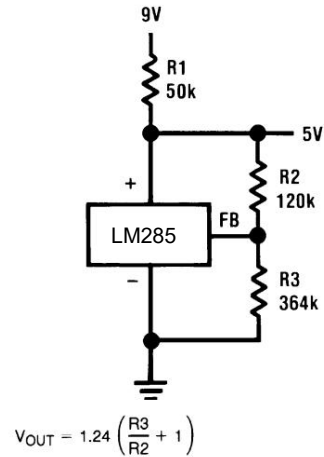


Figure 4. 5.0V Reference

ABSOLUTE MAXIMUM RATINGS ⁽¹⁾

CONDITION		MIN	MAX
Reverse Current		-	300mA
Forward Current		-	10mA
Operating Temperature Range ⁽²⁾		-40°C	85°C
ESD Susceptibility ⁽³⁾		-	2kV
Storage Temperature		-55°C	150°C
Soldering Information	TO-92 Package (10 sec.)	-	245°C
	SOP Package(10 sec.)	-	260°C
T _J (max) for Elevated Temperature Operation		-	100°C

Note: (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional. For specifications and test conditions, see the Electrical Characteristics. The specifications apply only for the test conditions listed.

(2) For elevated temperature operation, see Table 1 and Thermal Characteristics.

(3) The human body model is a 100pF capacitor discharged through a 1.5 kΩ resistor into each pin.

THERMAL CHARACTERISTICS

Over operating free-air temperature range (unless otherwise noted)

Thermal Resistance	TO-92	SOP
θ _{JA} (Junction to Ambient)	180°C/W (0.4" leads)	165°C/W
	170°C/W (0.125" leads)	
θ _{JC} (Junction to Case)	N/A	N/A

ELECTRICAL CHARACTERISTICS⁽¹⁾

Parameter	Conditions	Typ	LM285		Units (Limit)
			Tested Limit (2)	Design Limit (3)	
Reference Voltage	$I_R=100\mu A$	1.240	1.265 1.215	1.270 1.205	V(max) V(min)
Reference Voltage Change with Current	$I_{MIN}<I_R<1mA$ $1mA<I_R<20mA$	0.2 5	1 15	1.5 25	mV (max)
Dynamic Output Impedance	$I_R=100\mu A$ $I_{AC}=0.1I_R$	$f=100Hz$ $V_{OUT}=V_{REF}$ $V_{OUT}=5.3V$	0.4 1		Ω
Reference Voltage Change with Output Voltage	$I_R=100\mu A$	2	5	10	mV (max)
Feedback Current		16	30	35	nA(max)
Minimum Operating Current (see curve)	$V_{OUT}=V_{REF}$ $V_{OUT}=5.3V$	7 35	11 55	13 60	μA (max)
Output Wideband Noise	$I_R=100\mu A$, $10Hz<f<10KHz$ $V_{OUT}=V_{REF}$ $V_{OUT}=5.3V$	50 170			μV_{rms}
Average Temperature Coefficient(4)	$I_R=100\mu A$			150	ppm/ $^{\circ}C$ (max)
Long Tem Stability	$I_R=100\mu A$, $T=1000Hr$, $TA=25^{\circ}C \pm 0.1^{\circ}C$	20			ppm

- (1) Parameters identified with **boldface type** apply at temperature extremes. All other numbers apply at $T_A = T_J = 25^{\circ}C$. Unless otherwise specified, all parameters apply for $V_{REF} < V_{OUT} < 5.3V$.
- (2) Production tested.
- (3) Not production tested. These limits are not to be used to calculate average outgoing quality levels.
- (4) The average temperature coefficient is defined as the maximum deviation of reference voltage at all measured temperatures from T_{MIN} to T_{MAX} , divided by $T_{MAX} - T_{MIN}$. The measured temperatures are $-40-85^{\circ}C$.

TYPICAL PERFORMANCE CHARACTERISTICS

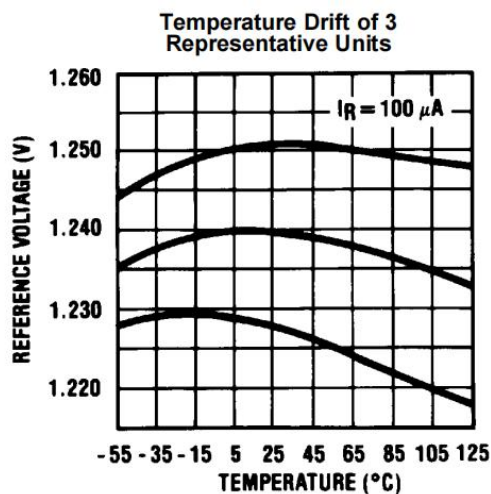


Figure 5.

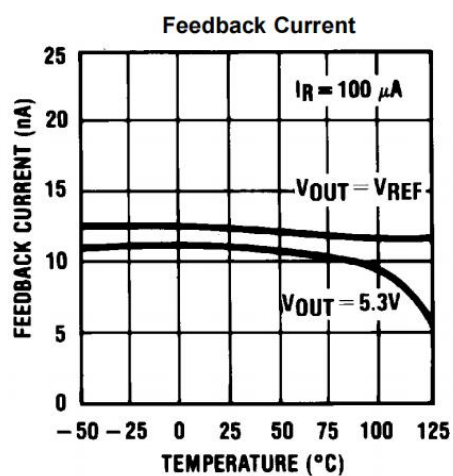


Figure 6.

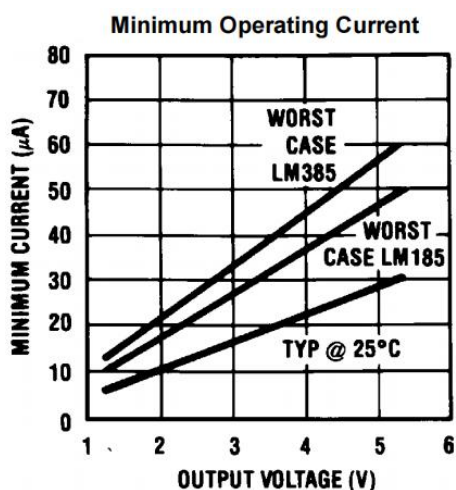


Figure 7.

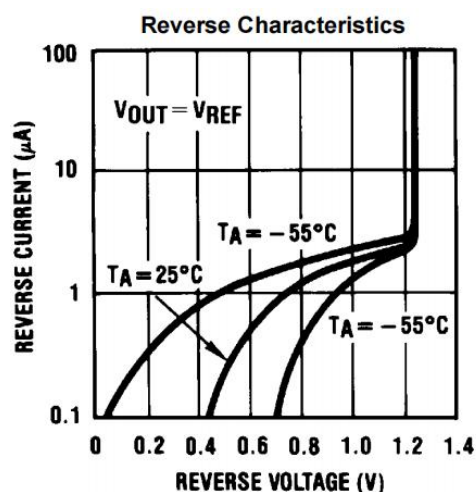


Figure 8.

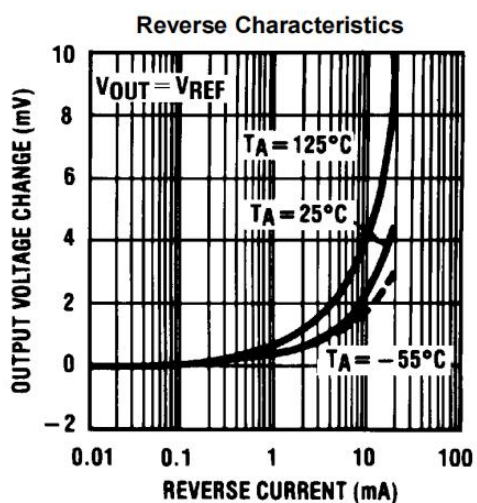


Figure 9.

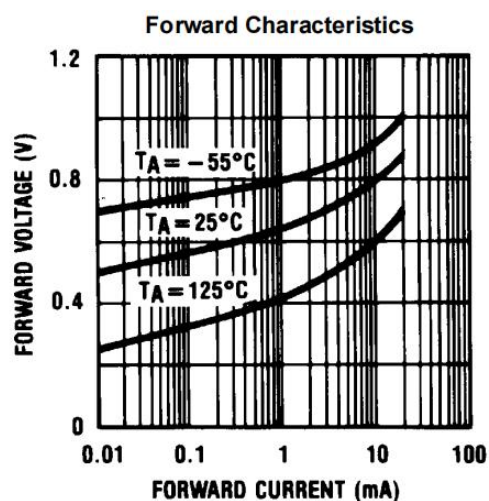


Figure 10.

TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)

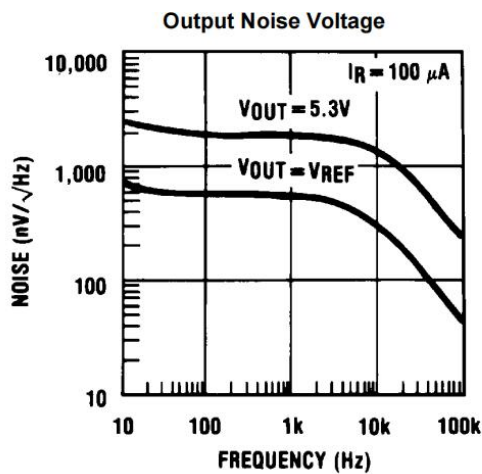


Figure 11.

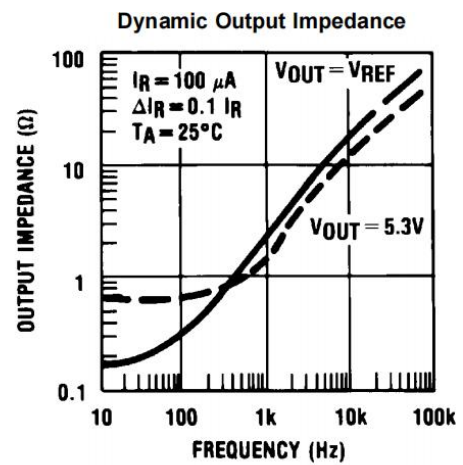


Figure 12.

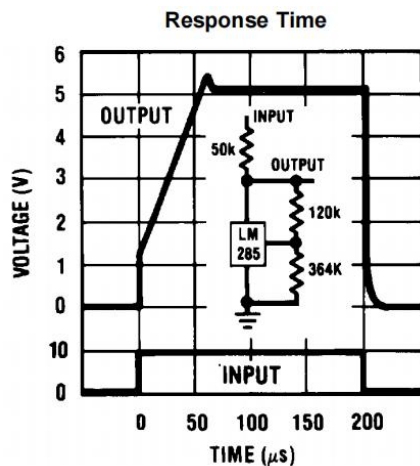


Figure 13.

Temperature Coefficient Typical

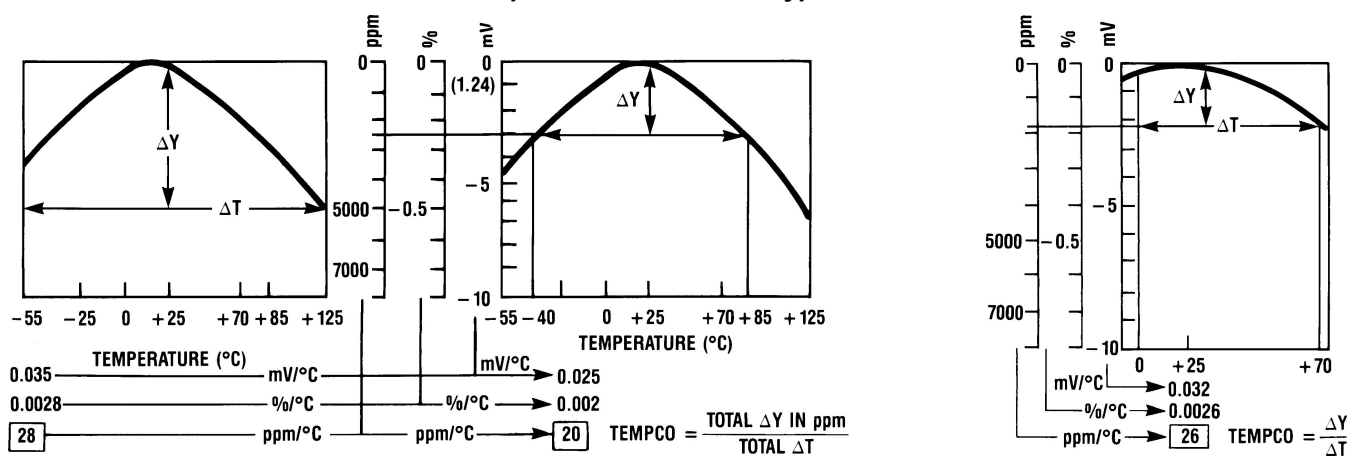


Figure 14.

TYPICAL APPLICATIONS

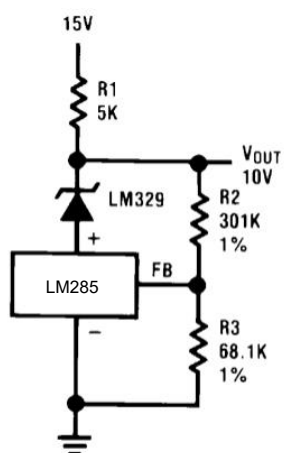


Figure 15. Precision 10V Reference

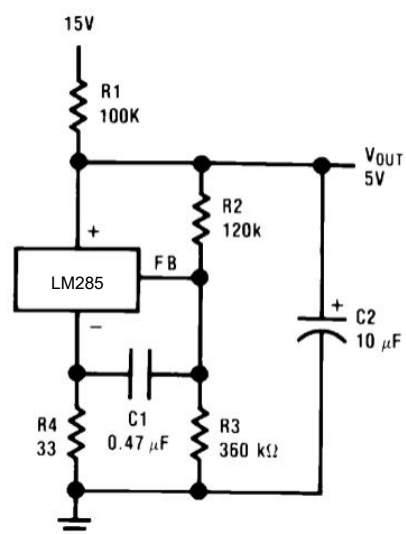


Figure 16. Low AC Noise Reference

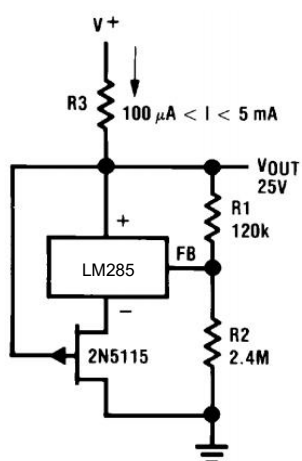


Figure 17. 25V Low Current Shunt Regulator

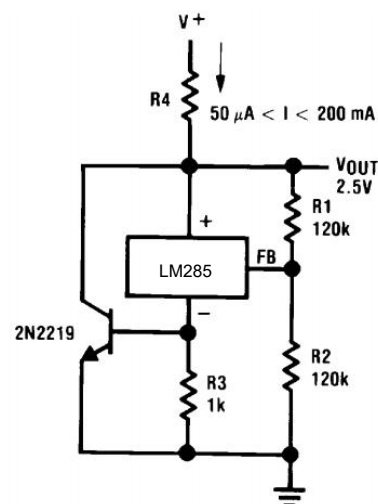


Figure 18. 200mA Shunt Regulator

TYPICAL APPLICATIONS(continued)

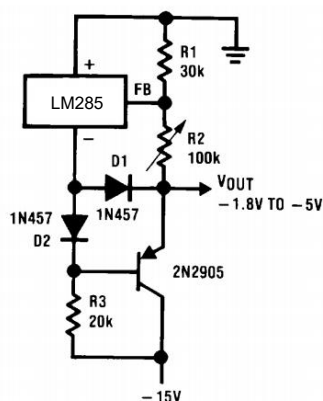


Figure 19. Series-Shunt 20mA Regulator

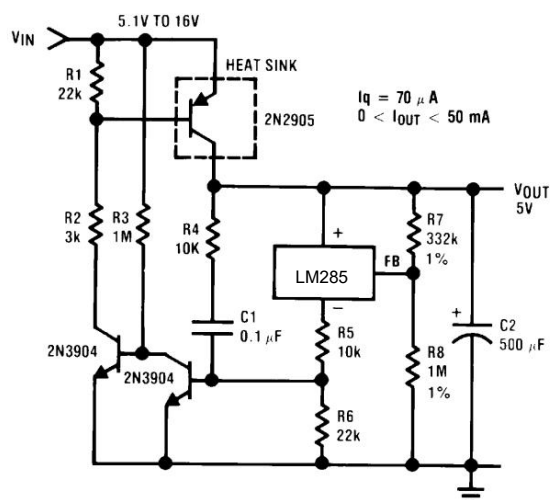


Figure 20. High Efficiency Low Power Regulator

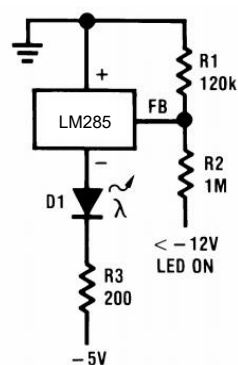


Figure 21. Voltage Level Detector

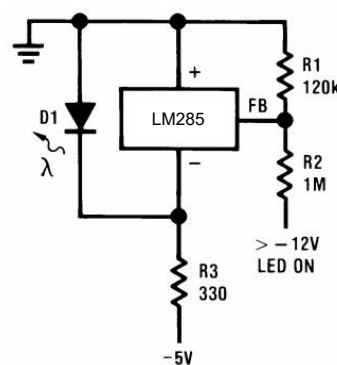


Figure 22. Voltage Level Detector

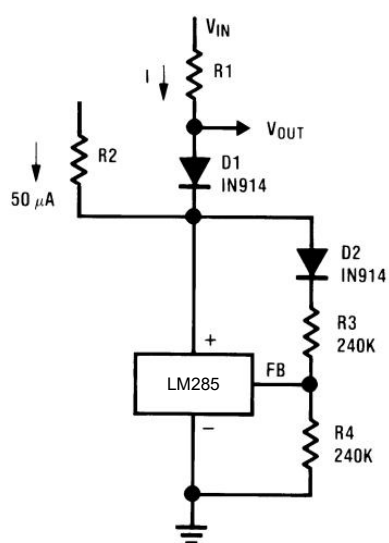


Figure 23. Fast Positive Clamp 2.4V + ΔVD1

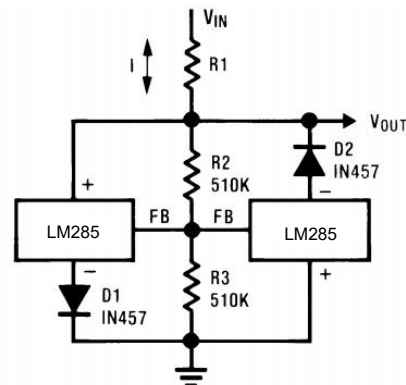


Figure 24. Bidirectional Clamp ±2.4V

TYPICAL APPLICATIONS(continued)

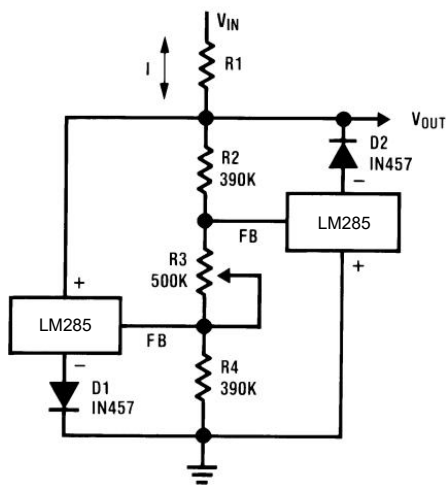


Figure 25. Bidirectional Adjustable Clamp $\pm 1.8\text{V}$ to $\pm 2.4\text{V}$

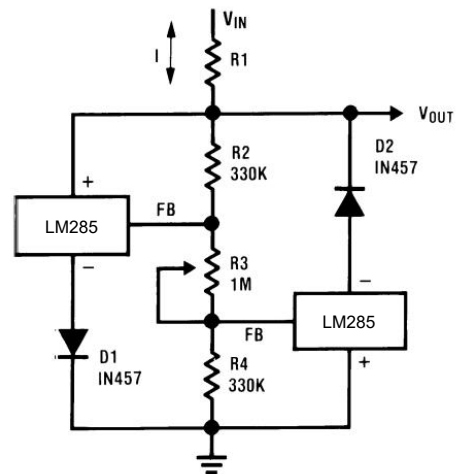


Figure 26. Bidirectional Adjustable Clamp $\pm 2.4\text{V}$ to $\pm 6\text{V}$

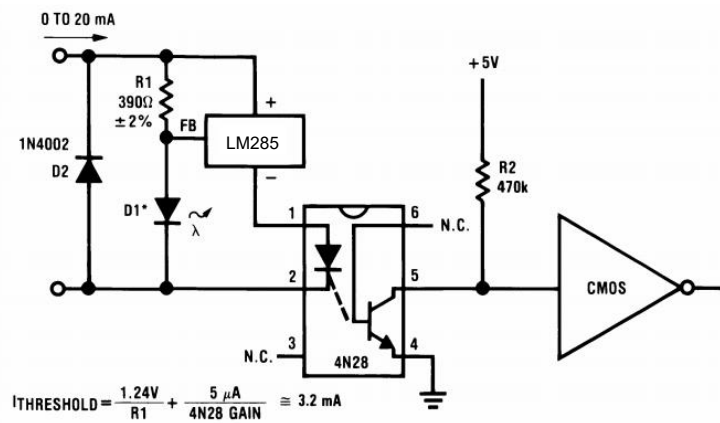


Figure 27. Simple Floating Current Detector


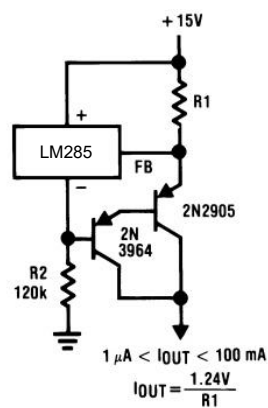


Figure 28. Current Source

TYPICAL APPLICATIONS(continued)

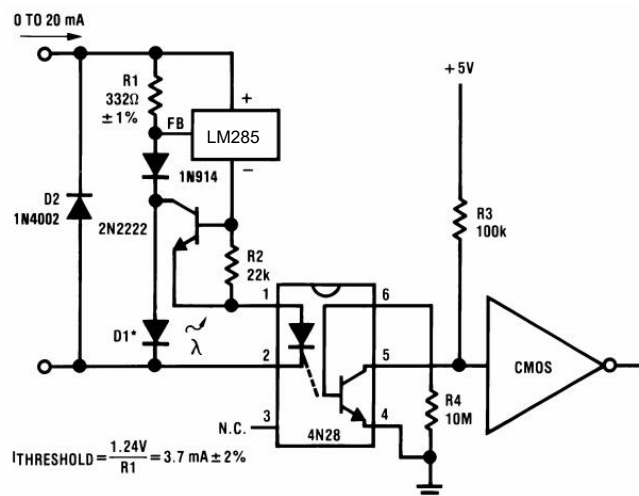

*D1 can be any LED, $V_F=1.5V$ to $2.2V$ at 3 mA . D1 may act as an indicator. D1 will be on if $I_{THRESHOLD}$ falls below the threshold current, except with $I=0$.

Figure 29. Precision Floating Current Detector

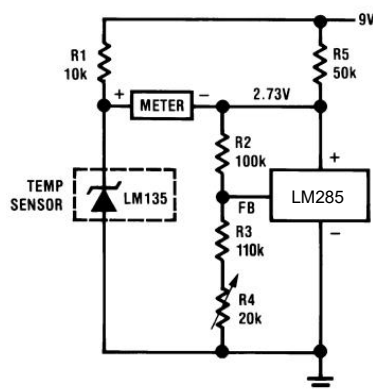


Figure 30. Centigrade Thermometer, 10mV/°C


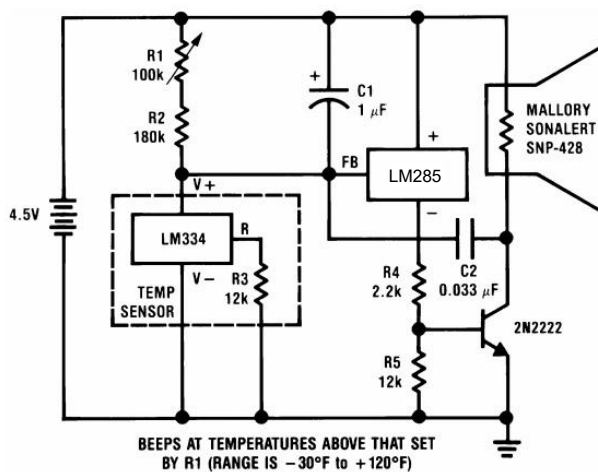



Figure 31. Freezer Alarm

Schematic Diagram

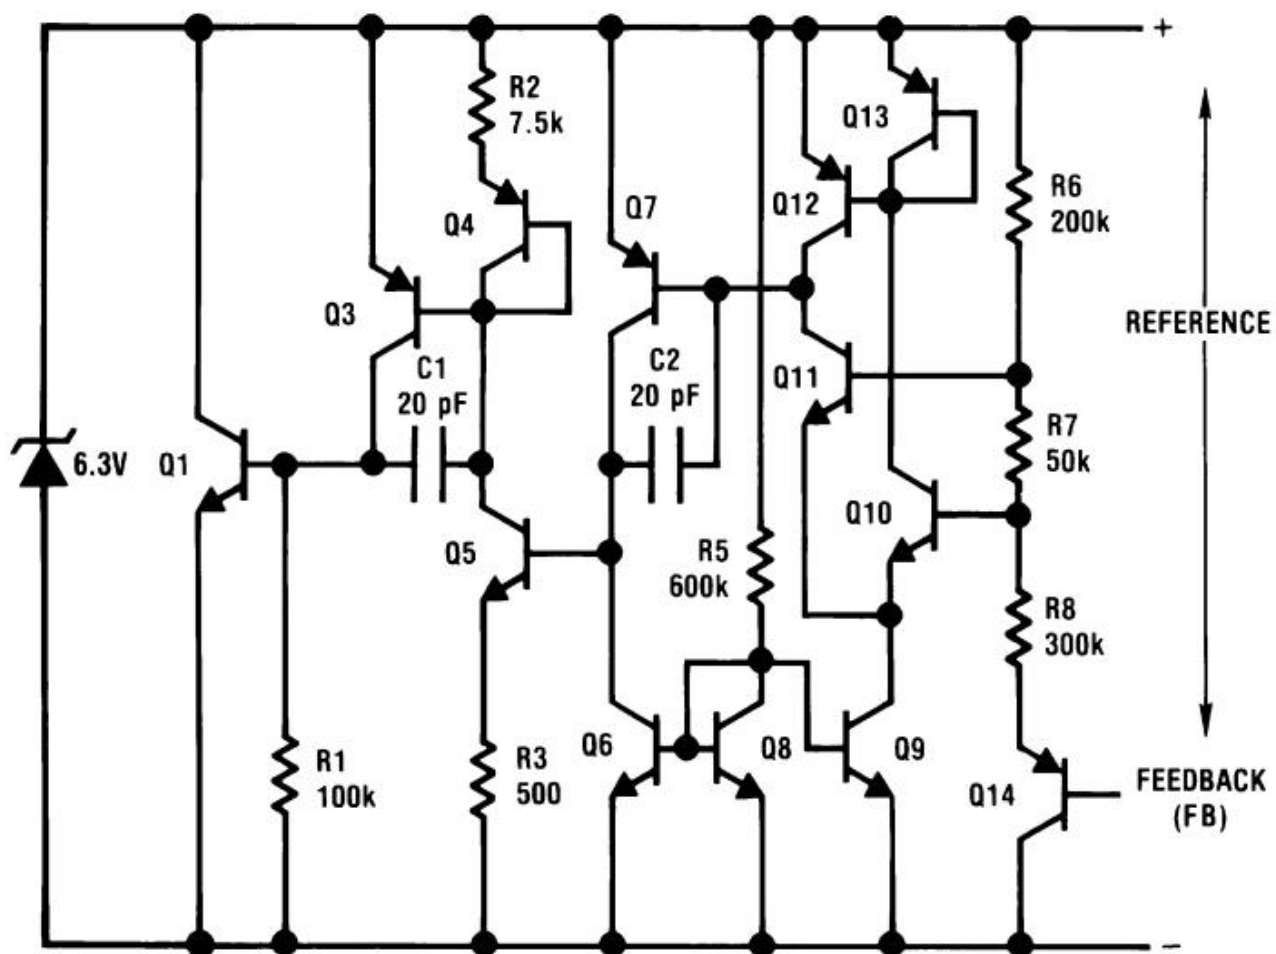


PHYSICAL DIMENSIONS

SOP-8 (150mil)

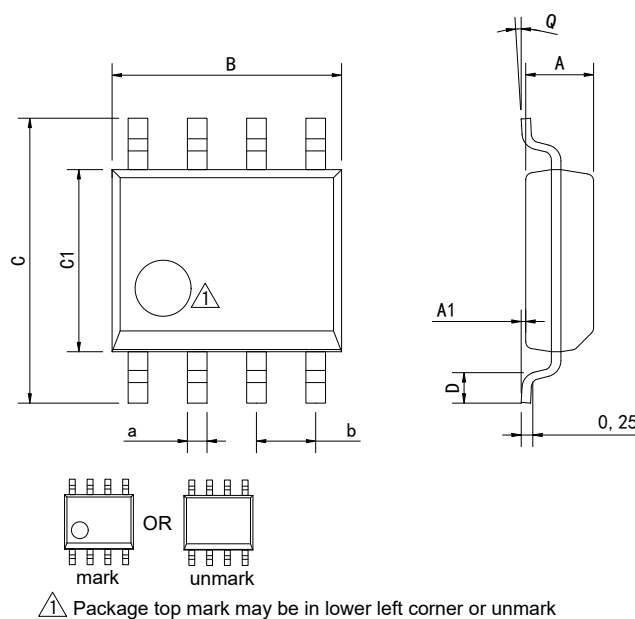

Dimensions In Millimeters(SOP-8)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	4.90	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	5.10	6.20	4.00	0.80	8°	0.45	


TO-92

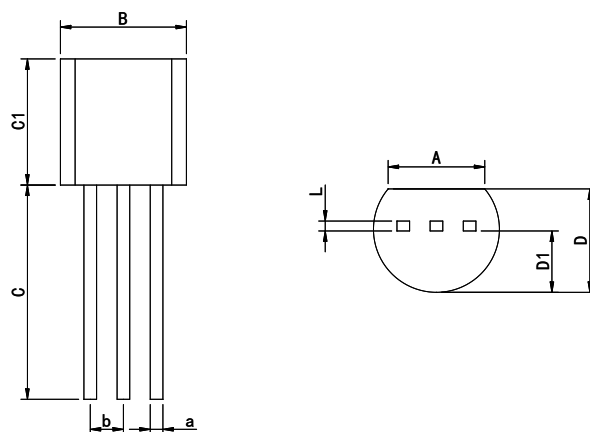

Dimensions In Millimeters(TO-92)									
Symbol:	A	B	C	C1	D	D1	L	a	b
Min:	3.43	4.44	13.5	4.32	3.17	2.03	0.33	0.40	1.27BSC
Max:	4.13	5.21	15.3	5.34	4.19	2.67	0.42	0.52	


PHYSICAL DIMENSIONS

DFN-8 3*3

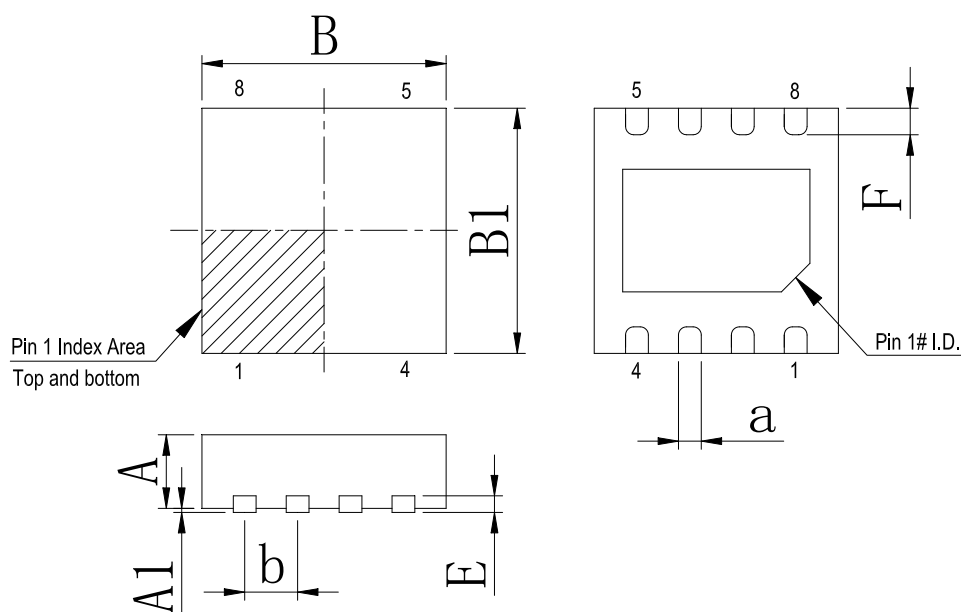

Dimensions In Millimeters(DFN-8 3*3)								
Symbol:	A	A1	B	B1	E	F	a	b
Min:	0.85	0.00	2.90	2.90	0.20	0.30	0.20	0.65 BSC
Max:	0.95	0.05	3.10	3.10	0.25	0.50	0.34	

DFN-8 2*2

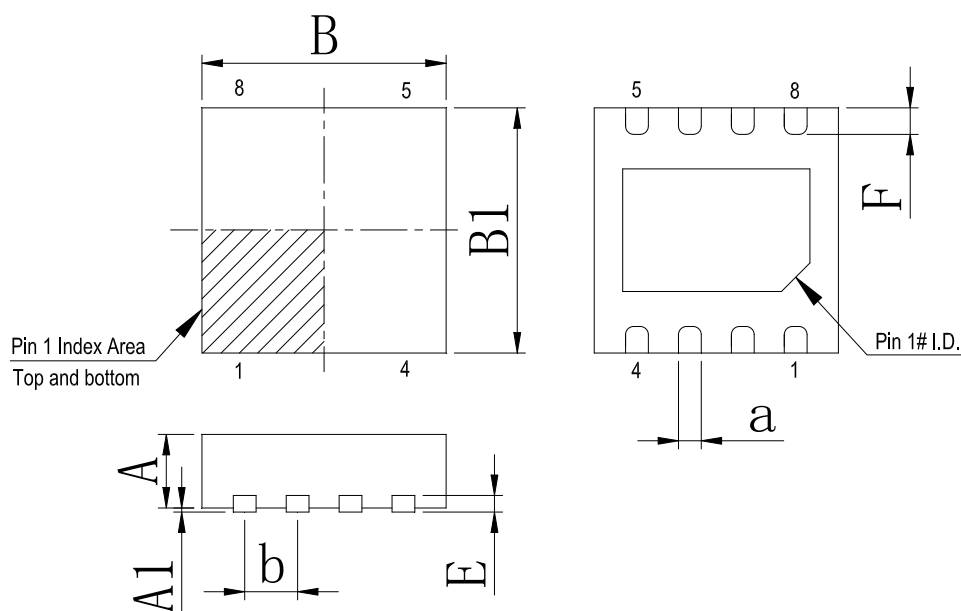

Dimensions In Millimeters(DFN-8 2*2)								
Symbol:	A	A1	B	B1	E	F	a	b
Min:	0.85	0	1.90	1.90	0.15	0.25	0.18	0.50TYP
Max:	0.95	0.05	2.10	2.10	0.25	0.45	0.30	

REVISION HISTORY

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2012-6	New	1-15
V1.1	2016-9	Update encapsulation type、 Add annotation for Maximum Ratings.	1、 3
V1.2	2021-1	Update TO-92 Physical Dimensions	12
V1.3	2024-11	Update Lead Temperature	3
V1.4	2025-3	Add DFN-8 package model	1
V1.5	2025-12	Update important statements、 Update sop-8 Dimension drawing	12、 15

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.