


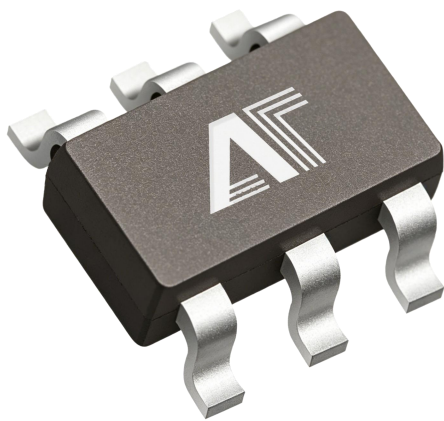

**Dual channel buffer  
door**

**SN74LVC2G34**

**Product Data Sheet**

|                 |
|-----------------|
| <b>AOTE DCC</b> |
| <b>RELEASE</b>  |

### ◆ Summary :

SN74LVC2G34 is a dual channel buffer gate that can operate within a supply voltage range of 1.65V to 5.5V.

The SN74LVC2G34 device executes the Boolean function  $Y=A$  in positive logic.

CMOS devices have high output driving capabilities while maintaining low static power consumption over a wide VCC operating range.

This device is packaged in SOT23-6 and SC70-6. The working temperature range is  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ .

### ◆ Product features

- Small Package: SOT23-6、SC70-6
- Working voltage range: 1.65V~5.5V
- Low power consumption: 0.1 $\mu\text{A}$  (typical value)
- Working temperature range:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- Input voltage up to 5.5V
- Output driver: When powered by 3.0V, output driver  $\pm 24\text{mA}$
- $I_{\text{off}}$  supports partial power-off mode operation;

### ◆ Applications

- Communication receiver
- Blu ray player and home theater
- Desktop or laptop computer
- Digital Video Camera (DVC)
- mobile phone
- Personal Navigation Device (GPS)
- Portable media player

### ◆ Packaging and Order Description

| Product Name | Order model     | Temperature range (° C)                         | boxed type | screen printing | MSL  | Packing Specification |
|--------------|-----------------|-------------------------------------------------|------------|-----------------|------|-----------------------|
| SN74LVC2G34  | SN74LVC2G34DCKR | $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ | SC70-6     | C9F             | MSL3 | Tape and Reel, 3000   |
|              | SN74LVC2G34DBVR | $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ | SOT23-6    | C345            | MSL3 | Tape and Reel, 3000   |

Note:


(1) This information is the latest data for the current version. If these data are updated, they will be promptly updated on our official website without further notice.

(2) Silk screen printing may have additional codes for internal control traceability of products (including data codes and supplier codes) or marking the place of origin.

(3) MSL, Humidity sensitivity level classified according to JEDEC industry standards.

(4) equivalent SOT363

## ◆ Logic diagram

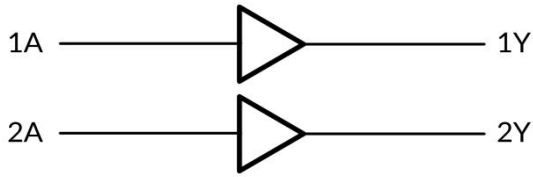


## ◆ Menu

| Input | Output |
|-------|--------|
| A     | Y      |
| H     | L      |
| L     | H      |

Y = A  
H = High level  
L = Low level

## ◆ Pin definition and function:

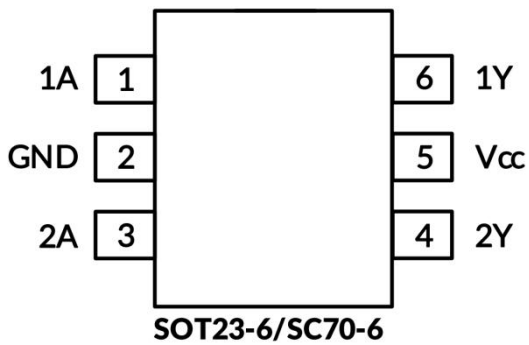

| Pin | Pin Name | I/O | Function Description |
|-----|----------|-----|----------------------|
| 1   | 1A       | I   | 1A input             |
| 2   | GND      | P   | grounding            |
| 3   | 2A       | I   | 2A input             |
| 4   | 2Y       | O   | 2Y output            |
| 5   | Vcc      | P   | power supply         |
| 6   | 1Y       | O   | 1Y output            |

◆ **Absolute maximum rating** Within the natural ventilation temperature range (unless otherwise specified)

|                       | Parameter                                                                               | Min     | Max                  | Unit |      |
|-----------------------|-----------------------------------------------------------------------------------------|---------|----------------------|------|------|
| V <sub>CC</sub>       | Power supply voltage range                                                              | -0.5    | 6.5                  | V    |      |
| V <sub>I</sub>        | Input voltage range                                                                     | -0.5    | 6.5                  | V    |      |
| V <sub>O</sub>        | The voltage range applicable to any output under high impedance or power-off conditions | -0.5    | 6.5                  | V    |      |
| V <sub>O</sub>        | The voltage range applicable to any output in either high or low level state            | -0.5    | V <sub>CC</sub> +0.5 | V    |      |
| I <sub>IK</sub>       | Input clamp current<br>V <sub>I</sub> < 0                                               | -       | -50                  | mA   |      |
| I <sub>OK</sub>       | Output clamp current<br>V <sub>O</sub> < 0                                              | -       | -50                  | mA   |      |
| I <sub>O</sub>        | Continuous output current                                                               | -       | ± 50                 | mA   |      |
|                       | Continuous current through VCC or GND                                                   | -       | ± 100                | mA   |      |
| • current parameters  |                                                                                         |         |                      |      |      |
| θ <sub>JA</sub>       | Thermal resistance to the environment                                                   | SOT23-6 | -                    | 230  | °C/W |
|                       |                                                                                         | SC70-6  | -                    | 265  |      |
| • current parameters  |                                                                                         |         |                      |      |      |
| temperature parameter | Junction temperature, T <sub>J</sub>                                                    | -65     | 150                  | °C   |      |
|                       | Storage temperature range, T <sub>stg</sub>                                             | -65     | 150                  |      |      |

◆ **ESD level**

The following ESD information is only applicable to sensitive equipment operated within an ti-static protection zones

| –                     | nominal value | Unit |  <b>ESD sensitivity warning</b><br><br>The scope of ESD damage can range from minor performance degradation to complete equipment failure. Precision integrated circuits may be more susceptible to damage as very small parameter changes can result in devices not meeting their published parameter specifications |
|-----------------------|---------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| human model           | ±4000         | V    |                                                                                                                                                                                                                                                                                                                                                                                                           |
| Charged Device Model  | ±1500         |      |                                                                                                                                                                                                                                                                                                                                                                                                           |
| Mechanical Model (MM) | ±200          |      |                                                                                                                                                                                                                                                                                                                                                                                                           |

Note:

- (1) This only represents the limit values obtained by the product under testing conditions, and does not mean that the product can work normally under these conditions or other parameter conditions beyond the specifications. Exceeding the range specified by the absolute maximum rated value above will cause damage to the product, and it is impossible to predict the working state of the product outside of the above conditions. If the product operates under conditions other than those mentioned above for a long time, it may affect its performance.
- (2) If the input and output current ratings are followed, it may exceed the input and output negative voltage ratings.
- (3) The value of VCC is provided in the recommended working condition table.
- (4) The thermal impedance of the package is calculated according to JEDEC-51 standard:
- (5) The maximum power consumption is a function of  $T_{J(MAX)}$ ,  $R_{\theta JA}$ , and  $T_A$ . The maximum power consumption at any ambient temperature is  $P_D = (T_{J(MAX)} - T_A) / R_{\theta JA}$ , which is suitable for packaging directly soldered to PCB.

# ◆ Electrical Characteristics

Within the natural ventilation temperature range (typical test conditions: TA=+25°C, full temperature=-40°C~125°C)

## ◆ Recommended working conditions

| Parameter                                                      | Symbol          | Test conditions                                                                                                                  | Min                                                       | Max                                                         | Unit |
|----------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------|------|
| power supply voltage                                           | V <sub>CC</sub> | work                                                                                                                             | 1.65                                                      | 5.5                                                         | V    |
|                                                                |                 | Only retain data                                                                                                                 | 1.5                                                       | -                                                           |      |
| High level input voltage                                       | V <sub>IH</sub> | V <sub>CC</sub> =1.65V to 1.95V<br>V <sub>CC</sub> =2.3V to 2.7V<br>V <sub>CC</sub> =3V to 3.6V<br>V <sub>CC</sub> =4.5V to 5.5V | 0.65 xV <sub>CC</sub><br>1.7<br>2<br>0.7 xV <sub>CC</sub> | -                                                           | V    |
| Low level output voltage                                       | V <sub>I</sub>  | V <sub>CC</sub> =1.65V to 1.95V<br>V <sub>CC</sub> =2.3V to 2.7V<br>V <sub>CC</sub> =3V to 3.6V<br>V <sub>CC</sub> =4.5V to 5.5V | -                                                         | 0.35 xV <sub>CC</sub><br>0.7<br>0.8<br>0.3 xV <sub>CC</sub> | V    |
| input voltage                                                  | V <sub>I</sub>  | -                                                                                                                                | 0                                                         | 5.5                                                         | V    |
| output voltage                                                 | V <sub>O</sub>  | -                                                                                                                                | 0                                                         | V <sub>CC</sub>                                             | V    |
| Input conversion up or down rate                               | Δt/Δv           | V <sub>CC</sub> =1.8V ± 0.15V,<br>2.5V ± 0.2V<br>V <sub>CC</sub> =3.3V ± 0.3V<br>V <sub>CC</sub> =5V ± 0.5V                      | -                                                         | -                                                           | -    |
| Working temperature range under natural ventilation conditions | T <sub>A</sub>  | -                                                                                                                                | -40                                                       | +125                                                        | °C   |

All unused input ports of the device must be kept at V<sub>CC</sub> or GND to ensure proper operation of the device.

### ◆ DC characteristics

| Parameter                        | Test conditions                                                               | Vcc           | temperature               | Min                  | Typ  | Max  | Unit |
|----------------------------------|-------------------------------------------------------------------------------|---------------|---------------------------|----------------------|------|------|------|
| V <sub>OH</sub>                  | I <sub>OH</sub> = -100μA                                                      | 1.65V to 5.5V | Full temperature          | V <sub>CC</sub> -0.1 | -    | -    | V    |
|                                  | I <sub>OH</sub> = -4mA                                                        | 1.65V         |                           | 1.2                  |      |      |      |
|                                  | I <sub>OH</sub> = -8mA                                                        | 2.3V          |                           | 1.9                  |      |      |      |
|                                  | I <sub>OH</sub> = -16mA                                                       | 3V            |                           | 2.4                  |      |      |      |
|                                  | I <sub>OH</sub> = -24mA                                                       |               |                           | 2.3                  |      |      |      |
|                                  | I <sub>OH</sub> = -32mA                                                       | 4.5V          |                           | 3.8                  |      |      |      |
| V <sub>OL</sub>                  | I <sub>OL</sub> = 100μA                                                       | 1.65V to 5.5V | Full temperature          | -                    | -    | 0.1  | V    |
|                                  | I <sub>OL</sub> = 4mA                                                         | 1.65V         |                           | -                    | -    | 0.45 |      |
|                                  | I <sub>OL</sub> = 8mA                                                         | 2.3V          |                           | -                    | -    | 0.3  |      |
|                                  | I <sub>OL</sub> = 16mA                                                        | 3V            |                           | -                    | -    | 0.4  |      |
|                                  | I <sub>OL</sub> = 24mA                                                        |               |                           | -                    | -    | 0.55 |      |
|                                  | I <sub>OL</sub> = 32mA                                                        | 4.5V          |                           | -                    | -    | 0.55 |      |
| I <sub>I</sub> A input           | V <sub>I</sub> = 5.5V or GND                                                  | 0V to 5.5V    | +25°C<br>Full temperature | -                    | ±0.1 | ±5   | μA   |
| I <sub>off</sub>                 | V <sub>I</sub> or V <sub>O</sub> = 5.5V                                       | 0             | +25°C<br>Full temperature | -                    | ±0.1 | ±10  | μA   |
| I <sub>CC</sub>                  | V <sub>I</sub> = 5.5V or GND, I <sub>O</sub> = 0                              | 1.65V to 5.5V | +25°C<br>Full temperature | -                    | 0.1  | 10   | μA   |
| ΔI <sub>CC</sub>                 | One input at V <sub>CC</sub> -0.6V,<br>Other inputs at V <sub>CC</sub> or GND | 3V to 5.5V    | Full temperature          | -                    | -    | 500  | μA   |
| C <sub>i</sub> (Input capacitor) | V <sub>I</sub> = V <sub>CC</sub> or GND                                       | 3.3V          | +25°C                     | -                    | 4    | -    | pF   |

(1) All unused input ports of the device must be kept at VCC or GND to ensure proper operation of the device.

(2) The limit value is 100% production testing conducted at 25°C. Ensure the limitation of the working temperature range by utilizing the correlation of statistical quality control (SQC) methods.

(3) Typical values represent the most likely parameter specifications determined during characterization. The actual typical values may vary over time and will also depend on the application and configuration.

### ◆ AC characteristics


| Parameter                  | Symbol   | Test conditions                                                                                             |                                                                                                                                 | Min | Typ                       | Max | Unit |
|----------------------------|----------|-------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-----|---------------------------|-----|------|
| propagation delay          | $t_{pd}$ | $V_{CC} = 1.8V \pm 0.15V$<br>$V_{CC} = 2.5V \pm 0.2V$<br>$V_{CC} = 3.3V \pm 0.3V$<br>$V_{CC} = 5V \pm 0.5V$ | $C_L = 30pF, R_L = 1k\Omega$<br>$C_L = 30pF, R_L = 500\Omega$<br>$C_L = 50pF, R_L = 500\Omega$<br>$C_L = 50pF, R_L = 500\Omega$ | -   | 13.3<br>5.3<br>4.2<br>3.4 | -   | ns   |
| Powerconsumption capacitor | $C_{pd}$ | $V_{CC} = 1.8V$<br>$V_{CC} = 2.5V$<br>$V_{CC} = 3.3V$<br>$V_{CC} = 5V$                                      | $f = 10MHz$                                                                                                                     | -   | 16<br>18<br>18<br>20      | -   | pF   |

(1) All unused input ports of the device must be kept at VCC or GND to ensure proper operation of the device.

(2) This parameter is ensured by design and/or characteristics and has not been tested in production


(3) Typical values represent the most likely parameter specifications determined during characterization. The actual typical values may vary over time and will also depend on the application and configuration.

◆ **Parameter measurement information**

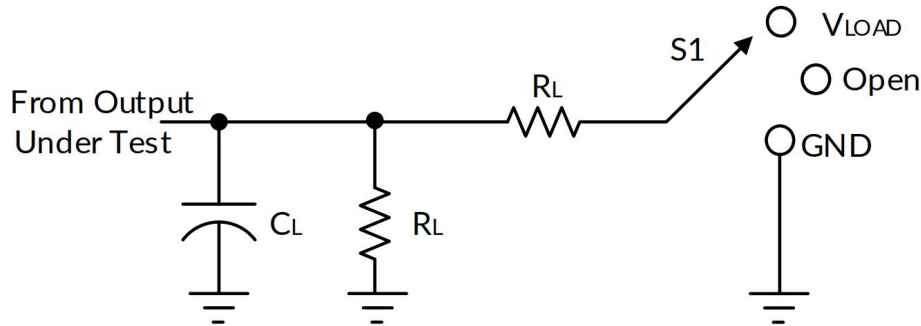

| TEST                               | S1                |
|------------------------------------|-------------------|
| t <sub>PLH</sub> /t <sub>PHL</sub> | Open              |
| t <sub>PLZ</sub> /t <sub>PZL</sub> | V <sub>LOAD</sub> |
| t <sub>PHZ</sub> /t <sub>PZH</sub> | GND               |

| V <sub>CC</sub> | INPUTS          |                                | V <sub>M</sub>     | V <sub>LOAD</sub>   | C <sub>L</sub> | R <sub>L</sub> | V <sub>Δ</sub> |
|-----------------|-----------------|--------------------------------|--------------------|---------------------|----------------|----------------|----------------|
|                 | V <sub>I</sub>  | t <sub>r</sub> /t <sub>f</sub> |                    |                     |                |                |                |
| 1.8V±0.15V      | V <sub>CC</sub> | ≤2ns                           | V <sub>CC</sub> /2 | 2 x V <sub>CC</sub> | 30pF           | 1kΩ            | 0.15V          |
| 2.5V±0.2V       | V <sub>CC</sub> | ≤2ns                           | V <sub>CC</sub> /2 | 2 x V <sub>CC</sub> | 30pF           | 500Ω           | 0.15V          |
| 3.3V±0.3V       | 3V              | ≤2.5ns                         | 1.5V               | 6V                  | 50pF           | 500Ω           | 0.3V           |
| 5V±0.5V         | V <sub>CC</sub> | ≤2.5ns                         | V <sub>CC</sub> /2 | 2 x V <sub>CC</sub> | 50pF           | 500Ω           | 0.3V           |

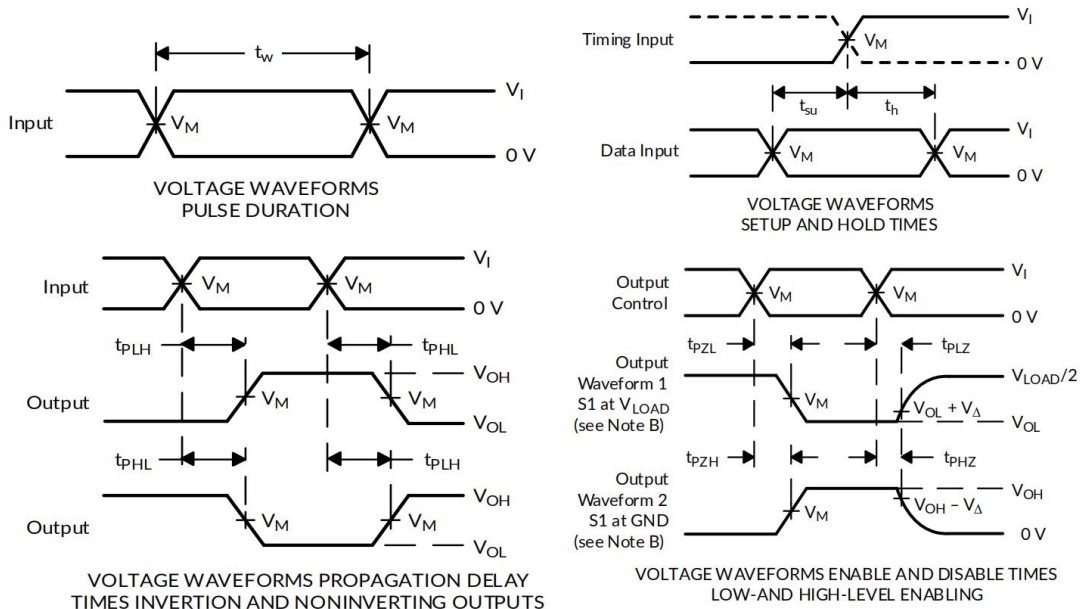

Note: A.CL includes probe and fixture capacitors.

B. Waveform 1 is used for outputs with internal conditions, where the output is low unless disabled by the output controller.

Waveform 2 is used for outputs with internal conditions, where the output is high unless disabled by the output controller.

C. All input pulses are provided by a generator with the following characteristics: PRR ≤ 10 MHz, Z<sub>o</sub>=50 Ω

D. Output one measurement at a time, with a transition for each measurement.

E. TPLZ and tPHZ are the same as tdis.

F. TPZL and tPZH are the same as ten.

G. TPLH and tPHL are the same as tpd.


H. Not all parameters and waveforms are applicable to all devices.

## ◆ Detailed description

### Overview

The SN74LVC2G34 device contains two buffer gates and executes the Boolean function  $Y=A$ . This device can be used for Ioff local power outage applications. When the device is powered off, the Ioff circuit will disable the output to prevent backflow current from damaging the device.

### Functional Block Diagram

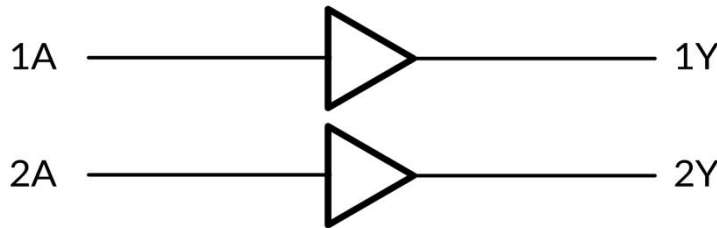

### Feature Description

- Wide operating voltage range.
- The working voltage range is 1.65V to 5.5V.
- Allow voltage reduction conversion.
- The input voltage is as high as 5.5V.
- The  $I_{off}$  function allows voltage to be provided on the input and output when  $V_{CC}$  is 0V.

## ◆ Application and Design

### Application Information

SN74LVC2G34 is a high drive CMOS device that can be used as a buffer with high output drive, such as in LED applications. It can generate a driving current of 24mA at a voltage of 3.0V, making it ideal for driving multiple outputs and suitable for high-speed applications up to 100MHz. The input can withstand a voltage of 5.5V, allowing it to be converted down to  $V_{CC}$ .

### Design requirements

This device adopts CMOS technology and has balanced output drive. Attention should be paid to avoiding bus contention as it may drive currents exceeding the maximum limit. High drive can also generate fast edges in light loads, so wiring and load conditions should be considered to prevent ringing.

## ◆ Power recommendations


The power pins should be equipped with good bypass capacitors to prevent power interference. For devices powered by a single power source, it is recommended to use a 0.1  $\mu F$  capacitor; For devices with multiple  $V_{CC}$  pins, it is recommended to use capacitors with 0.01  $\mu F$  or 0.022  $\mu F$  for each power pin. Multiple bypass capacitors can be connected in parallel to suppress noise of different frequencies. Usually, capacitors with 0.1  $\mu F$  and 1  $\mu F$  are used in parallel. The bypass capacitor should be installed as close as possible to the power supply pin.

## ◆ PCB layout design


### Precautions for PCB layout design

When using multi bit logic devices, the input pins should not be suspended. In practical applications, some functions of digital logic devices are often idle, such as using only two inputs from the three input gate or enabling only three gates from the four buffer gate. These unused input pins should not be left hanging, as undefined external connection point voltage will cause abnormal device operation. The following specifies the rules that must be followed in all situations. All idle input pins must be connected to a high or low bias to eliminate the risk of floating. The specific logic level that needs to be applied to the idle pin depends on the device's functional characteristics. The conventional approach is to connect it to GND or  $V_{CC}$  depending on the actual convenience.

### PCB layout diagram

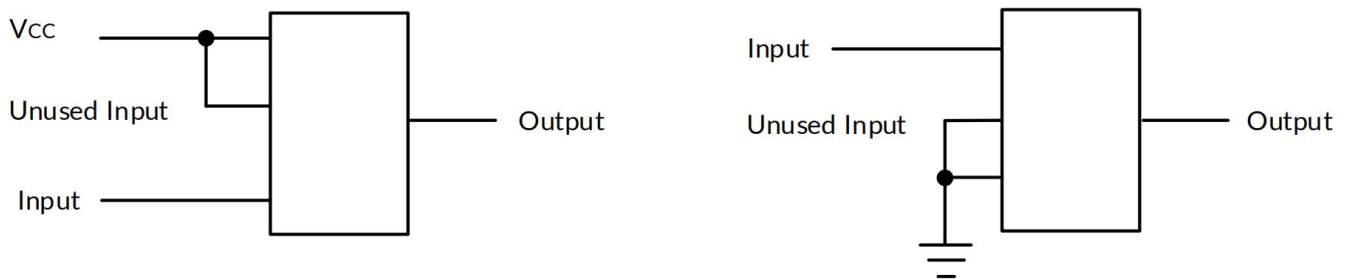

### ◆ Packaging specifications size

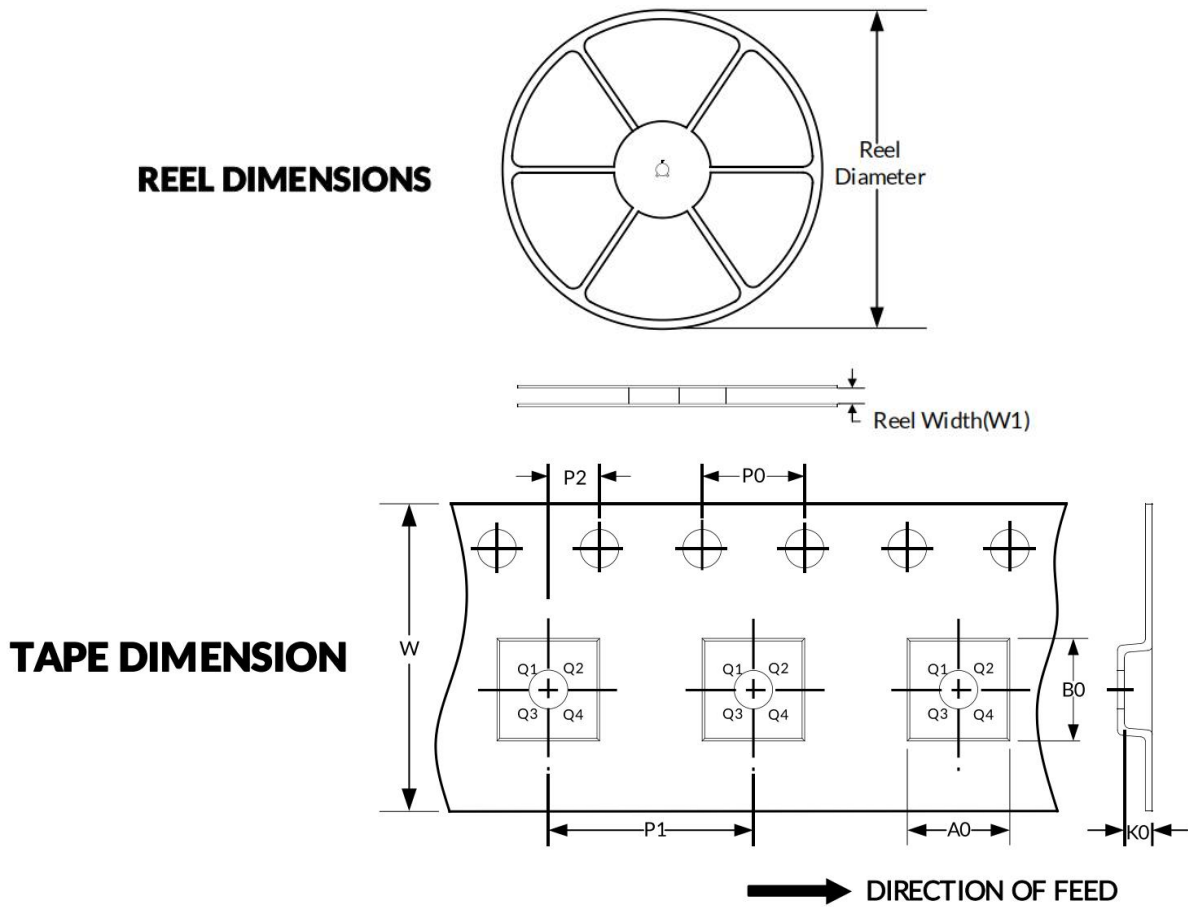

Attention: The pictures are for reference only. Please use the physical object as the standard

### ◆ Key parameter table

| Package Type | Reel Diameter | Reel Width (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|-----------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SC70-6       | 7"            | 9.5             | 2.40    | 2.50    | 1.20    | 4.0     | 4.0     | 2.0     | 8.0    | Q3            |
| SOT23-6      | 7"            | 9.5             | 3.17    | 3.23    | 1.37    | 4.0     | 4.0     | 2.0     | 8.0    | Q3            |

Note:



- 1.All dimensions are nominal sizes.
- 2.Excluding plastic wrap or metal protrusions with a maximum of 0.15 millimeters on each side.

# ◆ Packaging specifications and dimensions



Note:

- 1.Excluding plastic wrap or metal protrusions with a maximum of 0.15mm on each side.
- 2.BSC (Basic Center Spacing), where the "basic" spacing is the nominal spacing.
- 3.This image is subject to change without prior notice

## SOT23-6

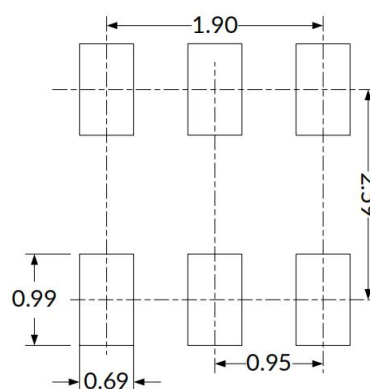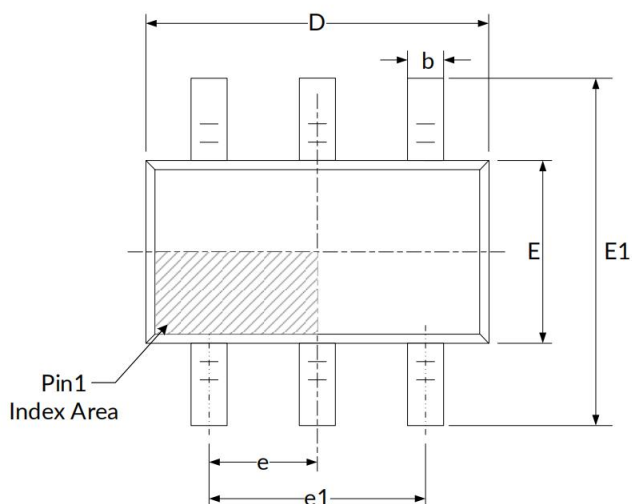

RECOMMENDED LAND PATTERN (Unit: mm)

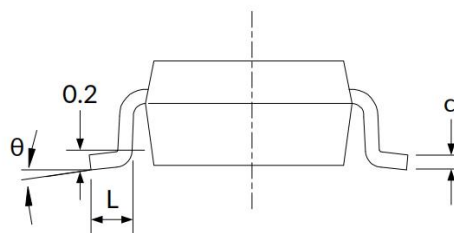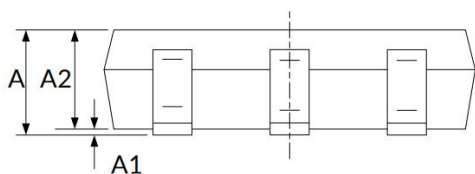



| Symbol | Dimensions (in millimeters) |       | Dimensions (in inches) |       |
|--------|-----------------------------|-------|------------------------|-------|
|        | Min                         | Max   | Min                    | Max   |
| A      | 1.050                       | 1.250 | 0.041                  | 0.049 |
| A1     | 0.000                       | 0.100 | 0.000                  | 0.004 |
| A2     | 1.050                       | 1.150 | 0.041                  | 0.045 |
| b      | 0.300                       | 0.500 | 0.012                  | 0.020 |
| c      | 0.100                       | 0.200 | 0.004                  | 0.008 |
| D      | 2.820                       | 3.020 | 0.111                  | 0.119 |
| E      | 1.500                       | 1.700 | 0.059                  | 0.067 |
| E1     | 2.650                       | 2.950 | 0.104                  | 0.116 |
| e      | 0.950 (BSC)                 |       | 0.037 (BSC)            |       |
| e1     | 1.800                       | 2.000 | 0.071                  | 0.079 |
| L      | 0.300                       | 0.600 | 0.012                  | 0.024 |
| θ      | 0°                          | 8°    | 0°                     | 8°    |

# ◆ Packaging specifications and dimensions



Note:

- 1.Excluding plastic wrap or metal protrusions with a maximum of 0.15mm on each side.
- 2.BSC (Basic Center Spacing), where the "basic" spacing is the nominal spacing.
- 3.This image is subject to change without prior notice

## SC70-6

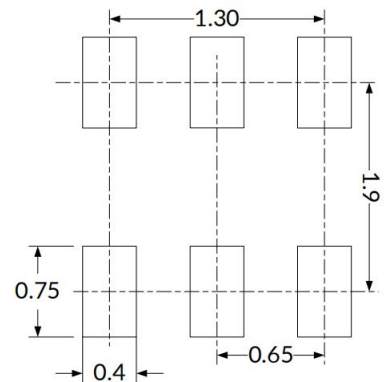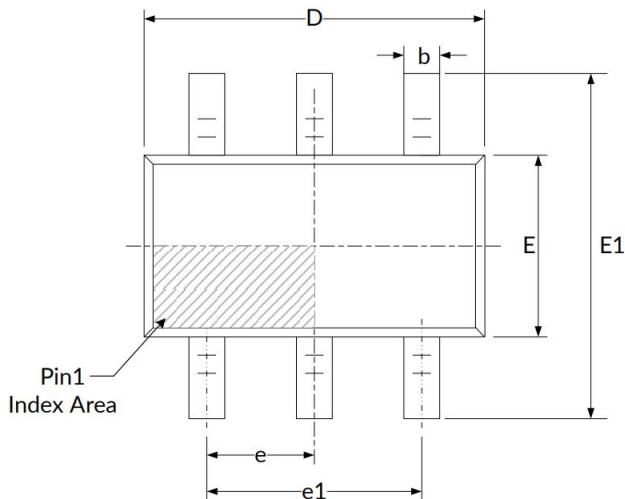

RECOMMENDED LAND PATTERN (Unit: mm)

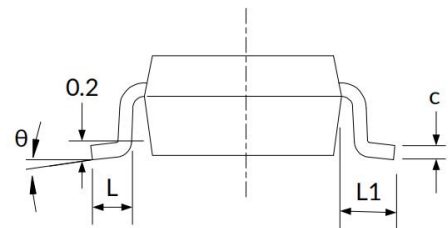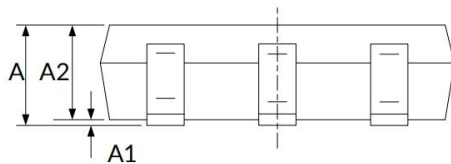

| Symbol   | Dimensions (in millimeters) |       | Dimensions (in inches) |       |
|----------|-----------------------------|-------|------------------------|-------|
|          | Min                         | Max   | Min                    | Max   |
| A        | 0.900                       | 1.100 | 0.035                  | 0.043 |
| A1       | 0.000                       | 0.100 | 0.000                  | 0.004 |
| A2       | 0.900                       | 1.000 | 0.035                  | 0.039 |
| b        | 0.150                       | 0.350 | 0.006                  | 0.014 |
| c        | 0.080                       | 0.150 | 0.003                  | 0.006 |
| D        | 2.000                       | 2.200 | 0.079                  | 0.087 |
| E        | 1.150                       | 1.350 | 0.045                  | 0.053 |
| E1       | 2.150                       | 2.450 | 0.085                  | 0.096 |
| e        | 0.650 (BSC)                 |       | 0.026(BSC)             |       |
| e1       | 1.300 (BSC)                 |       | 0.051(BSC)             |       |
| L        | 0.260                       | 0.460 | 0.010                  | 0.018 |
| L1       | 0.525                       |       | 0.021                  |       |
| $\theta$ | 0°                          | 8°    | 0°                     | 8°    |

**◆ Attention**

- AOTE implements dynamic technical updates. Specifications are subject to change. Refer to the official website for the latest version.
- Users must strictly adhere to specified conditions. Failures caused by misuse (overload, high temperature, incompatible circuits) are excluded from warranty.
- Contact technical support for customized validation in critical applications (medical devices, industrial control).
- This document is valid until December 31, 2026. Updates will be notified on the official website.
- For further clarification on technical specifications or application solutions, please contact us through official channels: