

SCHOTTKY BARRIER DIODE

FEATURES

- ◆ Low Forward Voltage Drop
- ◆ Guard Ring Construction for Transient Protection
- ◆ Negligible Reverse Recovery Time
- ◆ Low Capacitance
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- ◆ Case: SOD-123
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 16mg /0.00056oz

Pinning

1.Cathode	2.Anode
	
SOD-123	

Marking Code

MBR0540W	YFW S4
----------	--------

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter		Symbols	MBR0540W	Units
Peak Repetitive Reverse Voltage		V_{RRM}	40	V
RMS reverse voltage		V_{RMS}	28	V
Working Peak Reverse Voltage		V_{DC}	40	V
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load(JEDEC method)		I_{FSM}	13	A
Maximum Instantaneous Forward Voltage	$I_F=20mA$	V_F	0.37	V
	$I_F=200mA$		0.60	
Power Dissipation		P_D	400	mW
Reverse current	$V_R=30V$	I_R	5	uA
Thermal Resistance, Junction to Ambient Air		$R_{\theta JA}$	300	°C/W
Reverse voltage $I_R=100uA$		$V_{(BR)R}$	40	V
Reverse recovery time $I_F=I_R=200mA, I_{rr}=0.1 \times I_R, R_L=100\Omega$		T_{rr}	10	nS
Forward Continuons Current		I_{FM}	350	mA
Total capacitance $V_R=0V, f=1MHZ$		C_{tot}	28	pF
Junction temperature		T_j	125	°C
Storage temperature		T_{stg}	-55 ~ +150	°C

Fig.1 Power Derating Curve

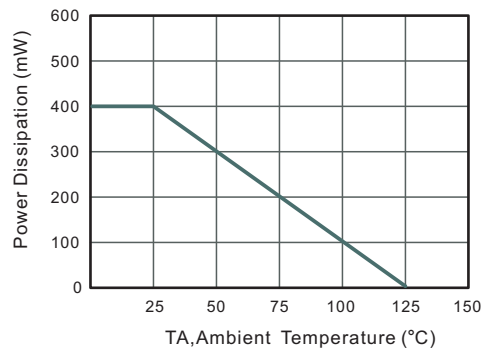


Fig.2 Typical Reverse Characteristics

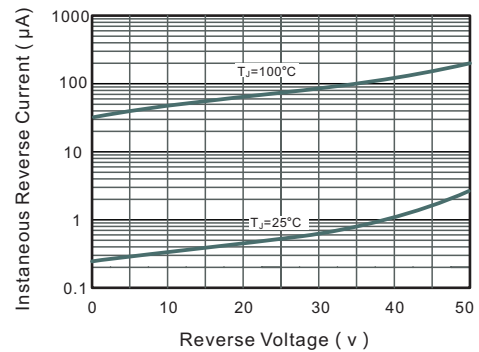


Fig.3 Forward Characteristics

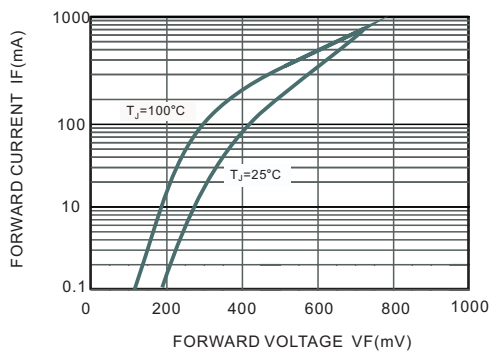


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

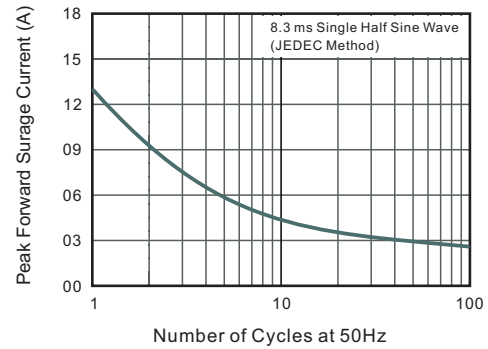


Fig.5 Typical Junction Capacitance


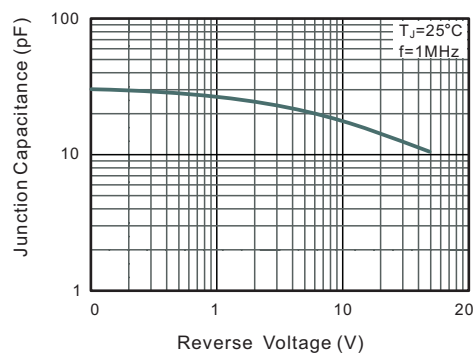


Fig.6 Typical Transient Thermal Impedance

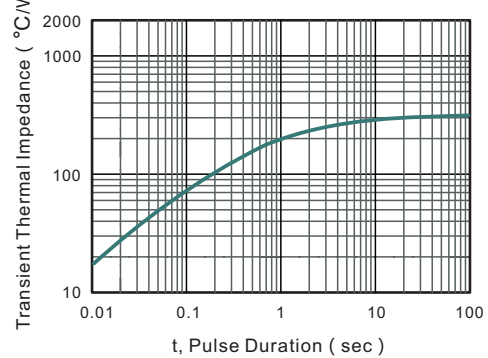

Ordering information


Package	Packing Description	Packing Quantity
SOD-123	Tape/Reel, 7" reel	3000PCS/Reel 120000PCS/Carton

Package Dimensions

SOD-123

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	0.9	1.3	35	51
C	0.09	0.22	3.5	8.7
D	1.5	1.8	59	71
E	2.5	2.8	98	110
E1	3.6	3.9	142	154
b	0.5	0.7	20	28
L1	0.25	0.45	10	18
A1	-	0.2	-	8
∠	9°			

The recommended mounting pad size

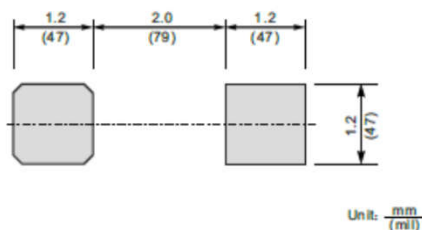

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.