


SOT-323 Plastic-Encapsulate Transistor

TRANSISTOR (PNP)

BC856AW, BW, CW
BC857AW, BW, CW
BC858AW, BW, CW

SOT-323



- 1. BASE
- 2. EMITTER
- 3. COLLECTOR

FEATURES

- Ideally suited for automatic insertion
- For Switching and AF Amplifier Applications

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage		V
		BC856W	
		BC857W	
		BC858W	
V_{CEO}	Collector-Emitter Voltage		V
		BC856W	
		BC857W	
		BC858W	
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current –Continuous	-0.1	A
P_{C^*}	Collector Power Dissipation	150	mW
T_J	Junction Temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature	-65-150	$^{\circ}\text{C}$

DEVICE MARKING









BC856AW=3A; BC856BW=3B;
 BC857AW=3E; BC857BW=3F; BC857CW=3G;
 BC858AW=3J; BC858BW=3K; BC858CW=3L

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage BC856W BC857W BC858W	V _{CBO}	I _C = -10μA, I _E =0	-80 -50 -30			V
Collector-emitter breakdown voltage BC856W BC857W BC858W	V _{CEO}	I _C = -10mA, I _B =0	-65 -45 -30			V
Emitter-base breakdown voltage	V _{EBO}	I _E = -1μA, I _C =0	-5			V
Collector cut-off current BC856W BC857W BC858W	I _{CBO}	V _{CB} =-70 V, I _E =0 V _{CB} =-50 V, I _E =0 V _{CB} =-30 V, I _E =0			-15	nA
Emitter cut-off current	I _{EBO}	V _{EB} =-5 V, I _C =0			-0.1	uA
DC current gain BC856AW,857AW,858AW BC856BW,857BW,858BW BC857CW,858CW	h _{FE}	V _{CE} = - 5V, I _C = - 2mA	125 220 420		250 475 800	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =-100mA, I _B = - 5mA			-0.65	V
Base-emitter saturation voltage	V _{BE(sat)}	I _C =-100mA, I _B = - 5mA			-1.1	V
Transition frequency	f _T	V _{CE} = -5 V, I _C = - 10mA f=100MHz	100			MHz
Collector output capacitance	C _{ob}	V _{CB} =-10V,f=1MHz			4.5	pF




Typical Characteristics

Static Characteristic

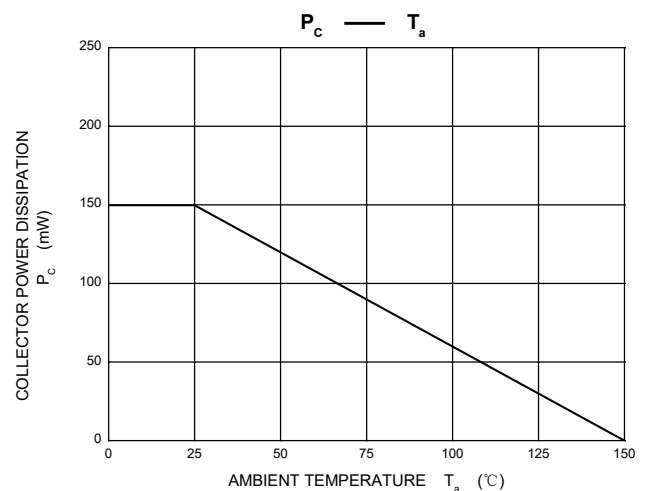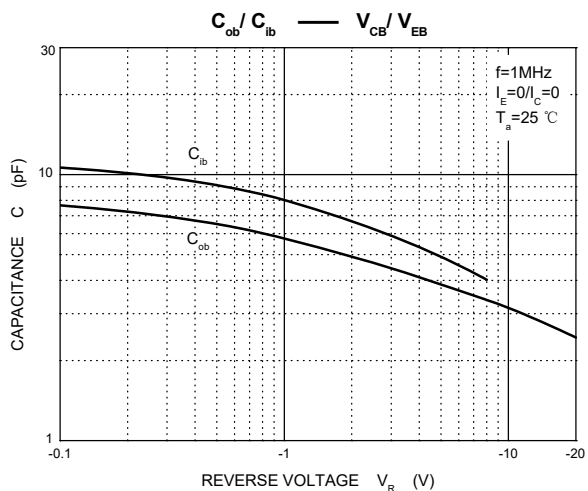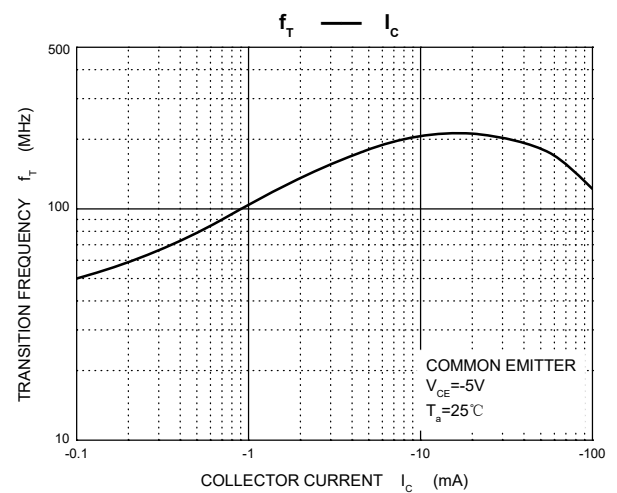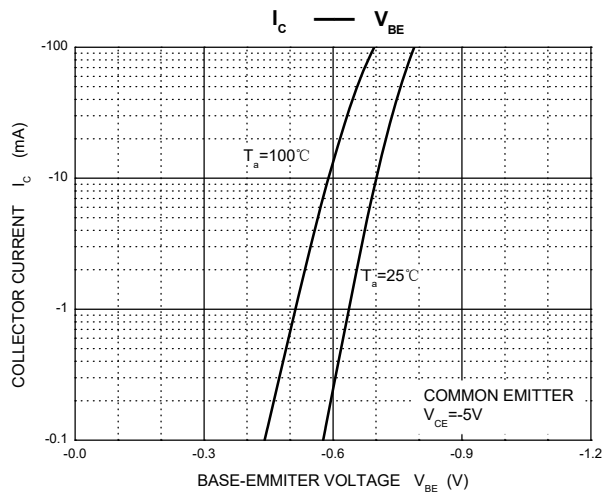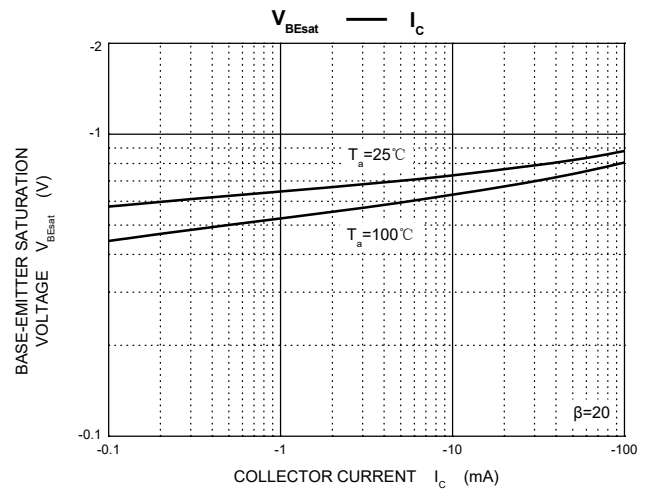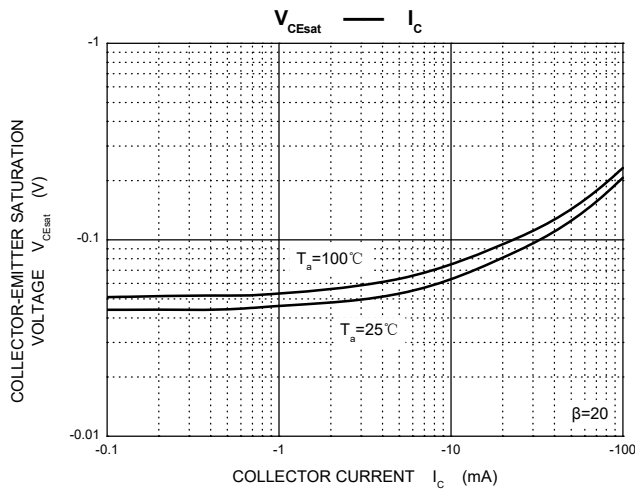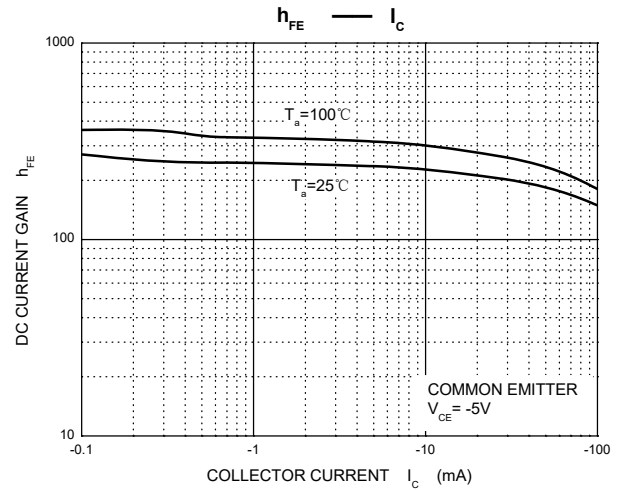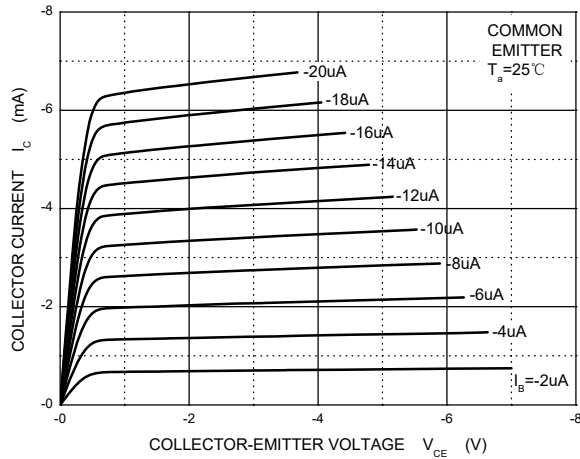

Outlitne Drawing

SOT-323 Package Outline Dimensions

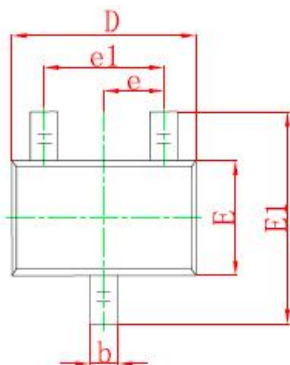

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

Important Notice and Disclaimer

Microdiode Semiconductor(Shenzhen) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Microdiode Semiconductor(Shenzhen) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Microdiode Semiconductor(Shenzhen) assume any liability for application assistance or customer product design. Microdiode Semiconductor(Shenzhen) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Semiconductor(Shenzhen).

Microdiode Semiconductor(Shenzhen) products are not authorized for use as critical components in life support devices or systems without express written approval of Microdiode Semiconductor(Shenzhen).