

AMS1117 800mA Bipolar Linear Regulator

Features

- Maximum output current is 1.2A
- Range of operation input voltage: Max 20V
- Line regulation: 0.03%/V (typ.)
- Standby current: 2mA (typ.)
- Load regulation: 0.2%/A (typ.)
- Environment Temperature: -20°C ~ 85°C

Applications

- Power Management for Computer Mother Board, Graphic Card
- LCD Monitor and LCD TV
- DVD Decode Board
- ADSL Modem
- Post Regulators For Switching Supplies

General Description

AMS1117 is a series of low dropout three-terminal regulators with a dropout of 1.3V at 800mA load current. AMS1117 features a very low standby current 2mA compared to 5mA of competitor.


Other than a fixed version, $V_{out} = 1.2V, 1.8V, 2.5V, 2.85V, 3.3V,$ and 5V, HG1117C has an adjustable version, which can provide an output voltage from 1.25 to 12V with only

two external resistors.

AMS1117 offers thermal shut down function, to assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within 2%. Other output voltage accuracy can be customized on demand, such as 1%.


AMS1117 is available in SOT-223 power package.

Typical Application

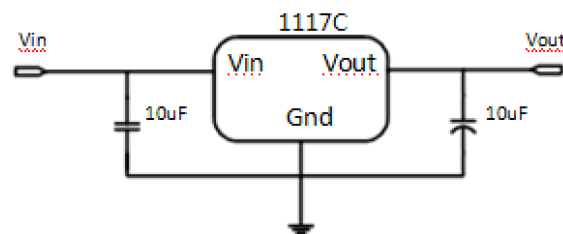

Application circuit of AMS1117 fixed version

Typical Electrical Characteristic

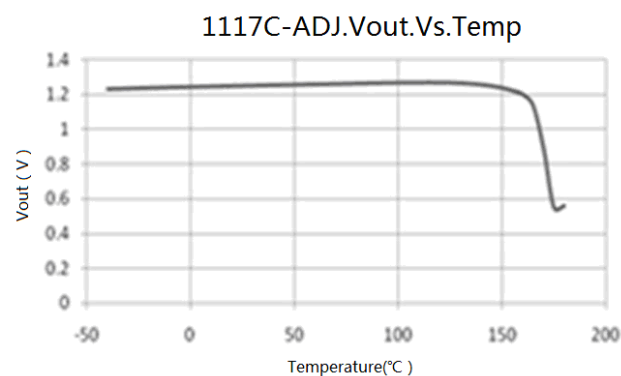

AMS1117 800mA Bipolar Linear Regulator

Selection Table

Marking	Part No.	Output Voltage	Package
AMS1117 XX YYWW	XX=12	1.2V	SOT-223
	XX=18	1.8V	
	XX=28	2.85V	
	XX=25	2.5V	
	XX=33	3.3V	
	XX=50	5.0V	
	XX=AD	Adj	


Ordering Information

Marking	Designator	Description
AMS1117 XX YYWW	AMS1117	Product code
	XX	Output Voltage(1.2~12.0V)
	YYWW	DATE CODE


Note: "XX" stands for output voltages. Other voltages can be specially customized

Parameters	Description
Temperature & Rohs	C:-40~85℃ ,Pb Free Rohs Std.
Package type	SOT-223
Packing type:	TR: Tape & Reel (Standard)
Voltage accuracy	2%(Customized)

Block Diagram

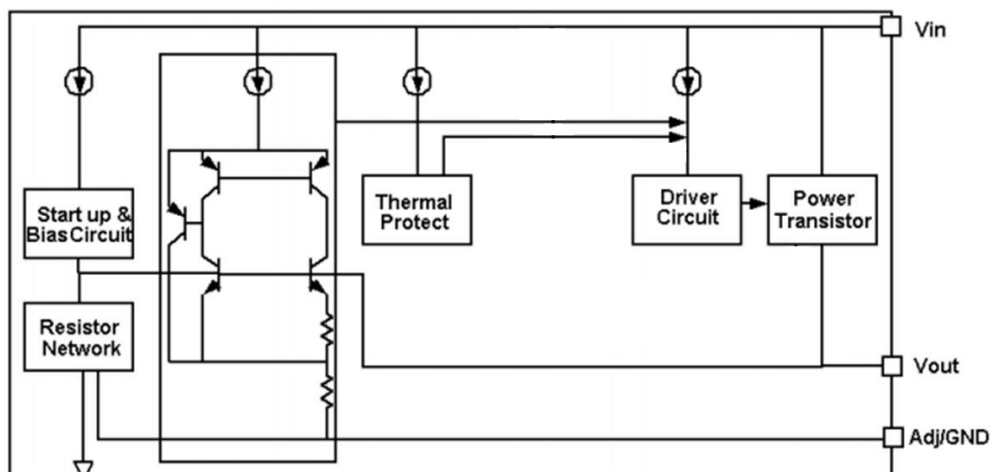

Pin Configuration

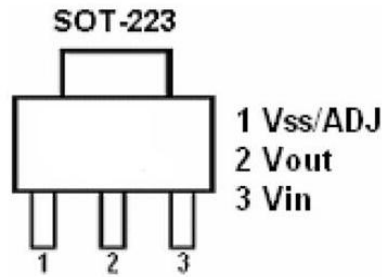

Absolute Maximum Ratings

Max Input Voltage 20V
 Max Operating Junction Temperature(Tj) 150°C
 Ambient Temperature(Ta) -40°C~ 85°C
 Storage Temperature(Ts) -40°C~150°C
 Lead Temperature & Time 260°C 10S
 Caution: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

Recommended Work Conditions

Recommended maximum input voltage 15V
 Recommended operating junction temperature(Tj) -20~125°C

Thermal Information

Parameter	Package	Rating	Unit
Package thermal resistance	SOT-223	20	°C/W

AMS1117 800mA Bipolar Linear Regulator

Electrical Characteristics

T_A=25°C, unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{ref}	Reference voltage	AMS1117 -Adj 10mA ≤ I _{out} ≤ 800mA, V _{in} = 3.25V	1.225	1.25	1.275	V
V _{out}	Output voltage	AMS1117 -1.2V 0 ≤ I _{out} ≤ 800mA, V _{in} = 3.2V	1.176	1.2	1.224	V
		AMS1117 -1.8V 0 ≤ I _{out} ≤ 800mA, V _{in} = 3.8V	1.764	1.8	1.836	V
		AMS1117 -2.5V 0 ≤ I _{out} ≤ 800mA, V _{in} = 4.5V	2.45	2.5	2.55	V
		AMS1117 -2.85V 0 ≤ I _{out} ≤ 800mA, V _{in} = 4.85V	2.793	2.85	2.907	V
		AMS1117 -3.3V 0 ≤ I _{out} ≤ 800mA, V _{in} = 5.3V	3.234	3.3	3.366	V
		AMS1117 -5.0V 0 ≤ I _{out} ≤ 800mA, V _{in} = 7.0V	4.9	5	5.1	V

ΔV _{out}	Line regulation	AMS1117 -1.2V I _{out} = 10mA, 2.7V ≤ V _{in} ≤ 10V		0.03	0.2	%/V
		AMS1117 -ADJ I _{out} = 10mA, 2.75V ≤ V _{in} ≤ 12V		0.03	0.2	%/V
		AMS1117 -1.8V I _{out} = 10mA, 3.3V ≤ V _{in} ≤ 12V		0.03	0.2	%/V
		AMS1117 -2.5V I _{out} = 10mA, 4.0V ≤ V _{in} ≤ 12V		0.03	0.2	%/V
		AMS1117 -2.85V I _{out} = 10mA, 4.35V ≤ V _{in} ≤ 12V		0.03	0.2	%/V
		AMS1117 -3.3V I _{out} = 10mA, 4.8V ≤ V _{in} ≤ 12V		0.03	0.2	%/V
		AMS1117 -5.0V I _{out} = 10mA, 6.5V ≤ V _{in} ≤ 12V		0.03	0.2	%/V

		AMS1117 -1.2V V _{in} = 2.7V, 10mA ≤ I _{out} ≤ 800mA		2	8	mV
		AMS1117 -ADJ V _{in} = 2.75V, 10mA ≤ I _{out} ≤ 800mA		2	8	mV
		AMS1117 -1.8V V _{in} = 3.3V, 10mA ≤ I _{out} ≤ 800mA		3	12	mV

AMS1117

800mA Bipolar Linear Regulator

ΔV_{out}	Load regulation	AMS1117 -2.5V $V_{in}=4.0V, 10mA \leq I_{out} \leq 800mA$		4	16	mV
		AMS1117 -2.85V $V_{in}=4.35V, 10mA \leq I_{out} \leq 800mA$		5	20	mV
		AMS1117 -3.3 $V_{in}=4.8V, 10mA \leq I_{out} \leq 800mA$		6	24	mV
		AMS1117 -5.0 $V_{in}=6.5V, 10mA \leq I_{out} \leq 800mA$		9	36	mV
Vdrop	Dropout voltage	$I_{out}=100mA$		1.2	1.3	V
		$I_{out}=800mA$		1.3	1.5	V
Imin	Minimum load current	AMS1117 -ADJ		2	10	mA
Iq	Quiescent Current	AMS1117 -1.2V, $V_{in}=10V$		2	5	mA
		AMS1117 -1.8V, $V_{in}=12V$		2	5	mA
		AMS1117 -2.5V, $V_{in}=12V$		2	5	mA
		AMS1117 -2.85V, $V_{in}=12V$		2	5	mA
		AMS1117 -3.3V, $V_{in}=12V$		2	5	mA
		AMS1117 -5.0V, $V_{in}=12V$		2	5	mA
IAdj	Adjust pin current	AMS1117 -ADJ $V_{in}=5V, 10mA \leq I_{out} \leq 800mA$		55	120	μA
Ichange	Iadj change	AMS1117 -ADJ $V_{in}=5V, 10mA \leq I_{out} \leq 800mA$		0.2	10	μA
$\Delta V/\Delta T$	Temperature coefficient			± 100		ppm
θ_{JC}	Thermal resistance	AMS1117 SOT-89-3L		20		$^{\circ}C/W$

Note1: All test are conducted under ambient temperature 25°C and within a short period of time 20ms

Note2: Load current smaller than minimum load current of AMS1117-ADJ will lead to unstable or oscillation output.

AMS1117 800mA Bipolar Linear Regulator

Detailed Description

AMS1117 is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, power transistors and its driver circuit and so on.


The thermal shut down modules can assure chip and its application system working safety when the junction temperature is larger than 140°C.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under 100 ppm/°C. And the accuracy of output voltage is guaranteed by trimming technique.

Typical Application

AMS1117 has an adjustable version and six fixed versions (1.2V, 1.8V, 2.5V, 2.85V, 3.3V and 5V)


Fixed Output Voltage Version

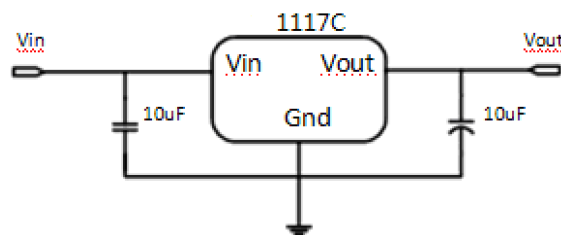

Application circuit of AMS1117 fixed version

- 1) Recommend using 10uF tan capacitor as bypass capacitor (C1) for all application circuit.
- 2) Recommend using 10uF tan capacitor to assure circuit stability.

Adjustable Output Voltage Version

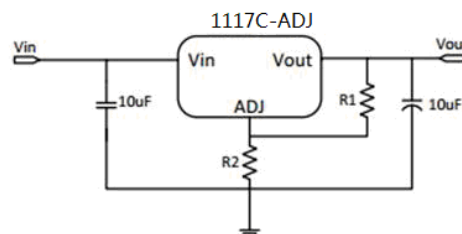

Application Circuit of AMS1117-ADJ

The output voltage of adjustable version follows the equation: $V_{out} = 1.25 \times (1 + R2/R1) + I_{Adj} \times R2$. We can ignore I_{Adj} because I_{Adj} (about 50uA) is much less than the current of $R1$ (about 2~10mA).

- 1) To meet the minimum load current (>10mA) requirement, $R1$ is recommended to be 125ohm or lower. As AMS1117-ADJ can keep itself stable at load current about 2mA, $R1$ is not allowed to be higher than 625ohm.

AMS1117 800mA Bipolar Linear Regulator

2) Using a bypass capacitor (C_{ADJ}) between the ADJ pin and ground can improve ripple rejection. This bypass capacitor prevents ripple from being amplified as the output voltage is increased. The impedance of C_{ADJ} should be less than $R1$ to prevent ripple from being amplified. As $R1$ is normally in the range of $100\Omega \sim 500\Omega$, the value of C_{ADJ} should satisfy this equation: $1/(2\pi \times f_{ripple} \times C_{ADJ}) < R1$.


Thermal Considerations

We have to take heat dissipation into great consideration when output current or differential voltage of input and output voltage is large. Because in such cases, the power dissipation consumed by AMS1117 is very large. AMS1117 series uses SOT-223 package type and its thermal resistance is about 20°C/W . And the copper area of application board can affect the total thermal resistance. If copper area is $5\text{cm} \times 5\text{cm}$ (two sides), the resistance is about 30°C/W . So the total thermal resistance is about $20^{\circ}\text{C/W} + 30^{\circ}\text{C/W}$. We can decrease total thermal resistance by increasing copper area in application board. When there is no good heat dissipation copper are in PCB, the total thermal resistance will be as high as 120°C/W , then the power dissipation of AMS1117 could allow on itself is less than 1W. And furthermore, AMS1117 will work at junction temperature higher than 125°C under such condition and no lifetime is guaranteed.


Typical Performance Characteristics

$T_A = 25^{\circ}\text{C}$, unless otherwise noted.


Line regulation

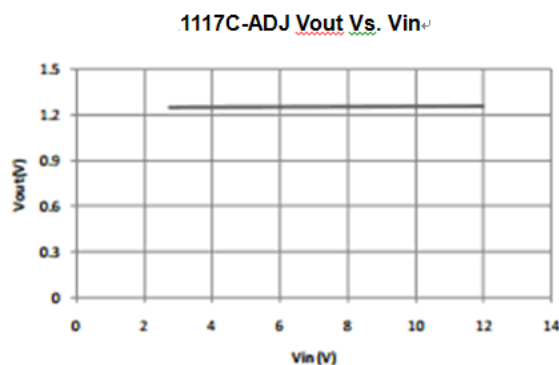


Load regulation

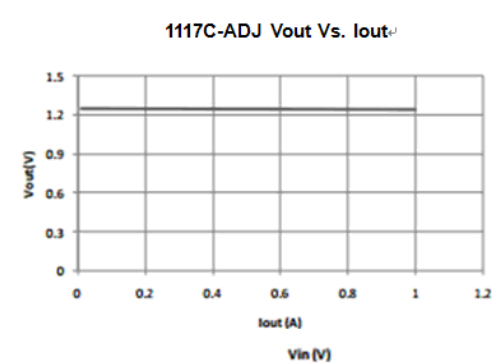

Dropout voltage

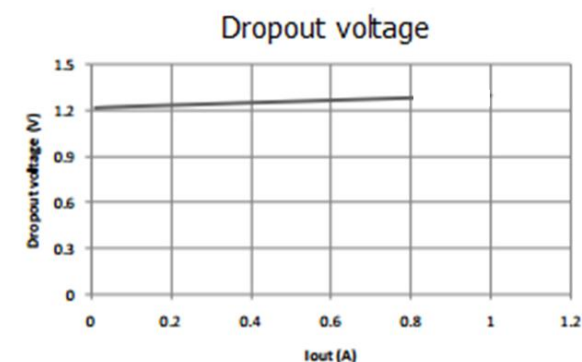


Thermal performance with OTP

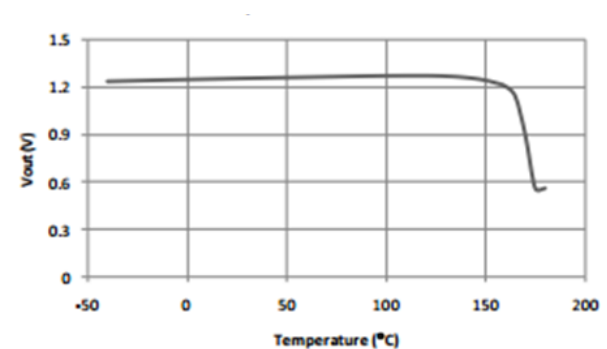

AMS1117 800mA Bipolar Linear Regulator


Package Information

SOT-223 PACKAGE OUTLINE DIMENSIONS

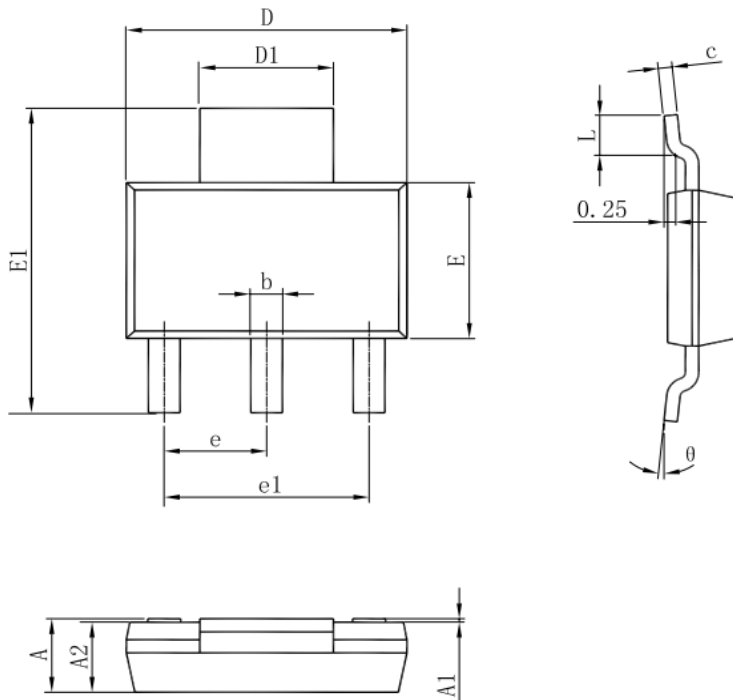

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.520	1.800	0.060	0.071
A1	0.000	0.100	0.000	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.820	0.026	0.032
c	0.250	0.350	0.010	0.014
D	6.200	6.400	0.244	0.252
D1	2.900	3.100	0.114	0.122
E	3.300	3.700	0.130	0.146
E1	6.830	7.070	0.269	0.278
e	2.300(BSC)		0.091(BSC)	
e1	4.500	4.700	0.177	0.185
L	0.900	1.150	0.035	0.045
θ	0°	10°	0°	10°

SOT-89-3L PACKAGE OUTLINE DIMENSIONS

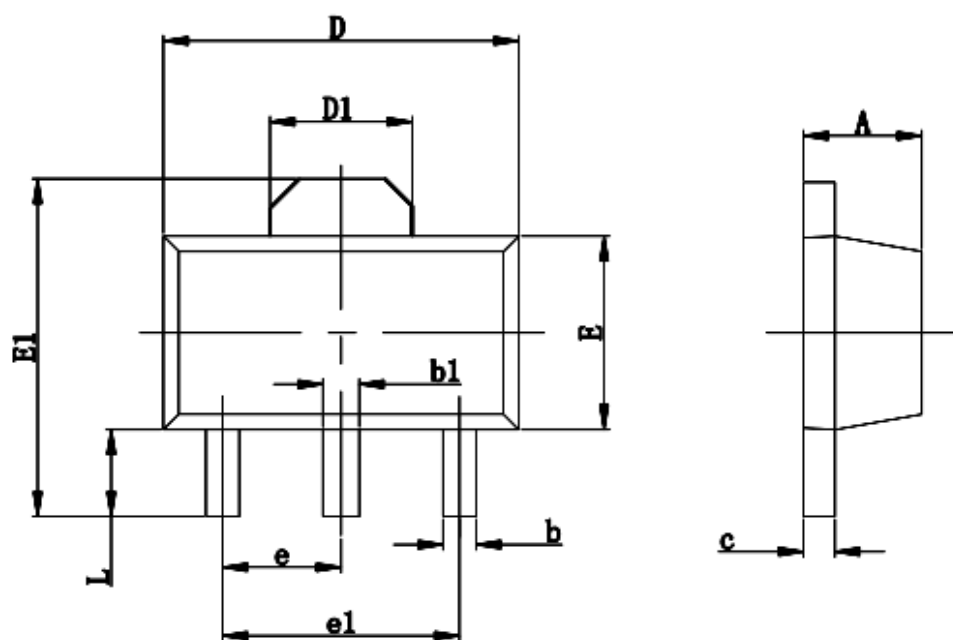


1. 塑脂体无缺损、缩孔、气泡、裂纹等缺陷；
2. 树脂体上下部XY方向偏差、树脂体中心与引线框中心错位 ± 0.035 ；
3. 粗糙度Ra为0.4—0.6。

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.350	0.520	0.013	0.197
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.350	2.550	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	3.000 TYP		0.118 TYP	
L	0.900	1.100	0.035	0.047

出厂标准：以公制为准

TO252-3L PACKAGE OUTLINE DIMENSIONS

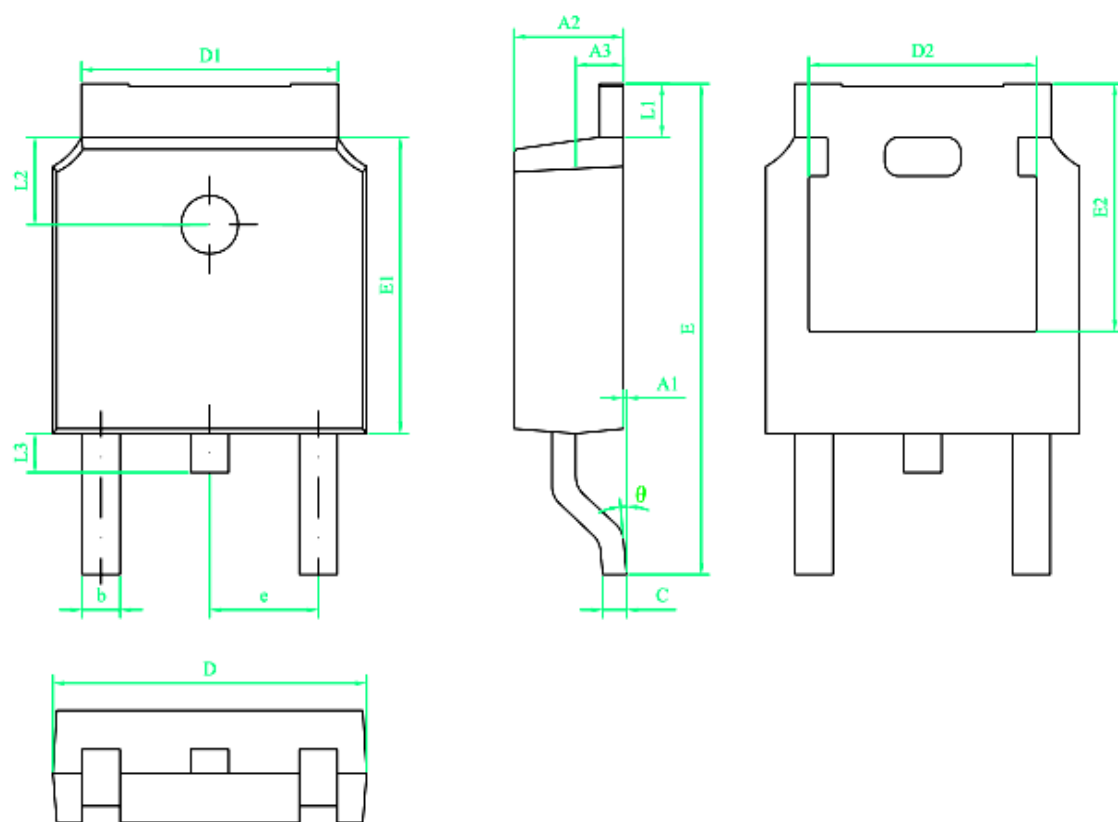

符号	尺寸	
	Min	Max
A1	0.00	0.13
A2	2.18	2.39
A3	0.90	1.10
b	0.65	0.85
c	0.46	0.61
D	6.35	6.73
D1	4.95	5.46
D2	4.32	
E	9.40	10.41
E1	5.97	6.22
E2	5.21	
e	2.286 BSC	
L1	0.89	1.27
L2	1.70	1.90
L3	0.60	1.00
θ	0.00	8.00

技术要求:

1. 树脂体不应有崩裂、缺损等缺陷;
2. 树脂上下部X、Y方向偏差不得超过0.20;
3. 胶体两端留废胶总和宽度不得超过0.50;
4. 所有单位为mm;