
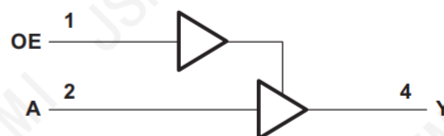


## Description

This single buffer is designed for 1.65V to 5.5V  $V_{CC}$  operation.

The SN74AHC1G126 device is a single line driver with 3-state output. The output is disabled when the output-enable input is low. To ensure the high-impedance state during power up or power down, OE should be tied to GND through a pull-down resistor, the minimum value of the resistor is determined by the current-sourcing capability of the driver. The SN74AHC1G126 is available in Green SOT23-5 and SOT-353 packages. It operates over an ambient temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

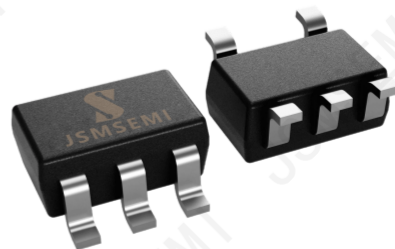

**Simplified Schematic**

## Features

- Packages: SOT23-5, SOT-353(SC70-5)
- Supports 5V  $V_{CC}$  Operation
- Inputs Accept Voltages to 5.5 V
- Provides Down Translation to  $V_{CC}$
- Typ  $t_{pd}$  of 3.9ns at 3.3 V
- Low Power Consumption, 1 $\mu\text{A}$  Max  $I_{CC}$
- $\pm 24\text{mA}$  Output Drive at 3V
- $I_{off}$  Supports Live Insertion, Partial-Power-Down Mode, and Back Drive Protection
- Latch-Up Performance Exceeds 100 mA
- ESD Protection Exceeds JESD 22
  - 2000V Human-Body Model
  - 200V Machine Model
  - 1000V Charged-Device Model
- Operating Temperature Range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- RoSH compatible


## Applications

- Cable Modem Termination Systems
- High-Speed Data Acquisition and Generation
- Military: Radars and Sonars
- Motor Controls: High-Voltage
- Power Line Communication Modems
- SSDs: Internal or External
- Video Broadcasting and Infrastructure: Scalable Platforms
- Video Broadcasting: IP-Based Multi-Format Transcoders
- Video Communication Systems

## Ordering Information

| Order number         | Package   | Marking | Operation Temperature Range    | MSL Grade | Ship, Quantity | Green |
|----------------------|-----------|---------|--------------------------------|-----------|----------------|-------|
| SN74AHC1G126DBVR-JSM | SOT-23-5L | C265    | $-40$ to $125^{\circ}\text{C}$ | 3         | TR&3000        | RoHS  |
| SN74AHC1G126DCKR-JSM | SOT-353   | CNK     | $-40$ to $125^{\circ}\text{C}$ | 3         | TR&3000        | RoHS  |

## Pin Configuration and Functions

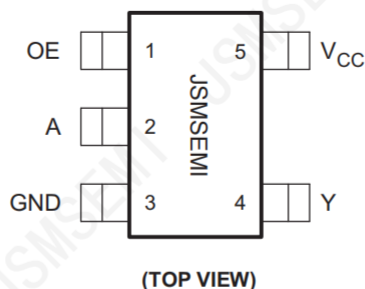

### Pin Functions

| PIN             |                    | TYPE | DESCRIPTION     |
|-----------------|--------------------|------|-----------------|
| NAME            | SN74AHC1G126       |      |                 |
|                 | SOT23-5<br>SOT-353 |      |                 |
| OE              | 1                  | I    | OE Enable/Input |
| A               | 2                  | I    | A Input         |
| GND             | 3                  | —    | Ground Pin      |
| Y               | 4                  | O    | Y Output        |
| V <sub>CC</sub> | 5                  | —    | Power Pin       |

## Specifications

### Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                  |                                                                                             |                    | MIN  | MAX                   | UNIT |
|------------------|---------------------------------------------------------------------------------------------|--------------------|------|-----------------------|------|
| V <sub>CC</sub>  | Supply voltage range                                                                        |                    | −0.5 | 6.5                   | V    |
| V <sub>I</sub>   | Input voltage range <sup>(2)</sup>                                                          |                    | −0.5 | 6.5                   | V    |
| V <sub>O</sub>   | Voltage range applied to any output in the high-impedance or power-off state <sup>(2)</sup> |                    | −0.5 | 6.5                   | V    |
| V <sub>O</sub>   | Voltage range applied to any output in the high or low state <sup>(2)(3)</sup>              |                    | −0.5 | V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>  | Input clamp current                                                                         | V <sub>I</sub> < 0 |      | −50                   | mA   |
| I <sub>OK</sub>  | Output clamp current                                                                        | V <sub>O</sub> < 0 |      | −50                   | mA   |
| I <sub>O</sub>   | Continuous output current                                                                   |                    |      | ±50                   | mA   |
|                  | Continuous current through V <sub>CC</sub> or GND                                           |                    |      | ±100                  | mA   |
| T <sub>sta</sub> | Storage temperature range                                                                   |                    | −65  | 150                   | °C   |

- (1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V<sub>CC</sub> is provided in the Recommended Operating Conditions table.

### ESD Ratings

| PARAMETER          | DEFINITION                 | VALUE | UNIT |
|--------------------|----------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge    | 2000  | V    |
|                    | Human body model (HBM)     | 1000  |      |
|                    | Charged device model (CDM) |       |      |

## Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                     |                                    |                                                                              | MIN                  | MAX                  | UNIT |
|---------------------|------------------------------------|------------------------------------------------------------------------------|----------------------|----------------------|------|
| $V_{CC}$            | Supply voltage                     | Operating                                                                    | 1.65                 | 5.5                  | V    |
|                     |                                    | Data retention only                                                          | 1.5                  |                      |      |
| $V_{IH}$            | High-level input voltage           | $V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$                                 | $0.65 \times V_{CC}$ |                      | V    |
|                     |                                    | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$                                   | 1.7                  |                      |      |
|                     |                                    | $V_{CC} = 3 \text{ V to } 3.6 \text{ V}$                                     | 2                    |                      |      |
|                     |                                    | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$                                   | $0.7 \times V_{CC}$  |                      |      |
| $V_{IL}$            | Low-level input voltage            | $V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$                                 |                      | $0.15 \times V_{CC}$ | V    |
|                     |                                    | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$                                   |                      | 0.7                  |      |
|                     |                                    | $V_{CC} = 3 \text{ V to } 3.6 \text{ V}$                                     |                      | 0.8                  |      |
|                     |                                    | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$                                   |                      | $0.15 \times V_{CC}$ |      |
| $V_I$               | Input voltage                      |                                                                              | 0                    | 5.5                  | V    |
| $V_O$               | Output voltage                     |                                                                              | 0                    | $V_{CC}$             | V    |
| $I_{OH}$            | High-level output current          | $V_{CC} = 1.65 \text{ V}$                                                    |                      | -4                   | mA   |
|                     |                                    | $V_{CC} = 2.3 \text{ V}$                                                     |                      | -8                   |      |
|                     |                                    | $V_{CC} = 3 \text{ V}$                                                       |                      | -16                  |      |
|                     |                                    | $V_{CC} = 4.5 \text{ V}$                                                     |                      | -24                  |      |
| $I_{OL}$            | Low-level output current           | $V_{CC} = 1.65 \text{ V}$                                                    |                      | 4                    | mA   |
|                     |                                    | $V_{CC} = 2.3 \text{ V}$                                                     |                      | 8                    |      |
|                     |                                    | $V_{CC} = 3 \text{ V}$                                                       |                      | 16                   |      |
|                     |                                    | $V_{CC} = 4.5 \text{ V}$                                                     |                      | 24                   |      |
| $\Delta t/\Delta v$ | Input transition rise or fall rate | $V_{CC} = 1.8 \text{ V} \pm 0.15 \text{ V}, 2.5 \text{ V} \pm 0.2 \text{ V}$ |                      | 20                   | ns/V |
|                     |                                    | $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$                                   |                      | 10                   |      |
|                     |                                    | $V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$                                     |                      | 5                    |      |
| $T_A$               | Operating free-air temperature     |                                                                              | -40                  | 125                  | °C   |

(1) All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.

## Thermal Information

| THERMAL METRIC  |                                        | SN74AHC1G126 |        | UNIT |
|-----------------|----------------------------------------|--------------|--------|------|
|                 |                                        | SOT23        | SOT353 |      |
|                 |                                        | 5 PINS       | 5 PINS |      |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 206          | 252    | °C/W |

### Electrical Characteristics

over recommended operating free-air temperature range (TYP values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.) <sup>(1)</sup>

| PARAMETER        |                | TEST CONDITIONS                                                               | V <sub>CC</sub> | TEMP  | MIN                  | TYP  | MAX  | UNIT |
|------------------|----------------|-------------------------------------------------------------------------------|-----------------|-------|----------------------|------|------|------|
| V <sub>OH</sub>  |                | I <sub>OH</sub> = -100μA                                                      | 1.65V to 5.5V   | Full  | V <sub>CC</sub> -0.1 |      |      | V    |
|                  |                | I <sub>OH</sub> = -4mA                                                        | 1.65V           |       | 1.2                  |      |      |      |
|                  |                | I <sub>OH</sub> = -8mA                                                        | 2.3V            |       | 1.9                  |      |      |      |
|                  |                | I <sub>OH</sub> = -16mA                                                       | 3V              |       | 2.4                  |      |      |      |
|                  |                | I <sub>OH</sub> = -24mA                                                       |                 |       | 2.3                  |      |      |      |
|                  |                | I <sub>OH</sub> = -32mA                                                       | 4.5V            |       | 3.8                  |      |      |      |
| V <sub>OL</sub>  |                | I <sub>OL</sub> = 100μA                                                       | 1.65V to 5.5V   | Full  |                      |      | 0.1  | V    |
|                  |                | I <sub>OL</sub> = 4mA                                                         | 1.65V           |       |                      |      | 0.45 |      |
|                  |                | I <sub>OL</sub> = 8mA                                                         | 2.3V            |       |                      |      | 0.3  |      |
|                  |                | I <sub>OL</sub> = 16mA                                                        | 3V              |       |                      |      | 0.4  |      |
|                  |                | I <sub>OL</sub> = 24mA                                                        |                 |       |                      |      | 0.55 |      |
|                  |                | I <sub>OL</sub> = 32mA                                                        | 4.5V            |       |                      |      | 0.55 |      |
| I <sub>I</sub>   | A or OE inputs | V <sub>I</sub> =5.5V or GND                                                   | 0V to 5.5V      | +25°C |                      | ±0.1 | ±1   | μA   |
|                  |                |                                                                               |                 | Full  |                      |      | ±5   |      |
| I <sub>off</sub> |                | V <sub>I</sub> or V <sub>O</sub> =5.5V                                        | 0V              | +25°C |                      | ±0.1 | ±1   | μA   |
|                  |                |                                                                               |                 | Full  |                      |      | ±10  |      |
| I <sub>OZ</sub>  |                | V <sub>O</sub> =0V to 5.5V                                                    | 3.6V            | Full  |                      |      | 10   | μA   |
| I <sub>CC</sub>  |                | V <sub>I</sub> =5.5V or GND, I <sub>O</sub> =0                                | 1.65V to 5.5V   | +25°C |                      | 0.1  | 1    | μA   |
|                  |                |                                                                               |                 | Full  |                      |      | 10   |      |
| ΔI <sub>CC</sub> |                | One input at V <sub>CC</sub> -0.6V,<br>Other inputs at V <sub>CC</sub> or GND | 3V to 5.5V      | Full  |                      |      | 500  | μA   |

### Switching Characteristics, $-40^\circ\text{C}$ to $125^\circ\text{C}$

over recommended operating free-air temperature range,  $C_L = 15\text{ pF}$  (unless otherwise noted) (see Figure 3)

| PARAMETER | FROM<br>(INPUT) | TO<br>(OUTPUT) | $V_{CC}=1.8\text{V}\pm 0.15\text{V}$ | $V_{CC}=2.5\text{V}\pm 0.2\text{V}$ | $V_{CC}=3.3\text{V}\pm 0.3\text{V}$ | $V_{CC}=5\text{V}\pm 0.5\text{V}$ | UNIT |
|-----------|-----------------|----------------|--------------------------------------|-------------------------------------|-------------------------------------|-----------------------------------|------|
|           |                 |                | TYP                                  | TYP                                 | TYP                                 | TYP                               |      |
| $t_{pd}$  | A               | Y              | 6.1                                  | 3.7                                 | 3.9                                 | 2.1                               | ns   |

### Switching Characteristics, $-40^\circ\text{C}$ to $125^\circ\text{C}$

over recommended operating free-air temperature range,  $C_L = 30\text{ pF}$  or  $50\text{ pF}$  (unless otherwise noted) (see Figure 4)


| PARAMETER | FROM<br>(INPUT) | TO<br>(OUTPUT) | $V_{CC}=1.8\text{V}\pm 0.15\text{V}$ | $V_{CC}=2.5\text{V}\pm 0.2\text{V}$ | $V_{CC}=3.3\text{V}\pm 0.3\text{V}$ | $V_{CC}=5\text{V}\pm 0.5\text{V}$ | UNIT |
|-----------|-----------------|----------------|--------------------------------------|-------------------------------------|-------------------------------------|-----------------------------------|------|
|           |                 |                | TYP                                  | TYP                                 | TYP                                 | TYP                               |      |
| $t_{pd}$  | A               | Y              | 8.6                                  | 5.3                                 | 4.0                                 | 2.9                               | ns   |
| $t_{en}$  | OE              | Y              | 9.5                                  | 5.8                                 | 5.0                                 | 3.3                               | ns   |
| $t_{dis}$ | OE              | Y              | 7.4                                  | 4.3                                 | 4.4                                 | 3.0                               | ns   |

### Operating Characteristics

$T_A = 25^\circ\text{C}$





| PARAMETER |                                  |                 | TEST<br>CONDITIONS | $V_{CC}=1.8\text{V}$ | $V_{CC}=2.5\text{V}$ | $V_{CC}=3.3\text{V}$ | $V_{CC}=5\text{V}$ | UNIT        |
|-----------|----------------------------------|-----------------|--------------------|----------------------|----------------------|----------------------|--------------------|-------------|
|           |                                  |                 |                    | TYP                  | TYP                  | TYP                  | TYP                |             |
| $C_{pd}$  | Power dissipation<br>capacitance | Output enabled  | $f=10\text{MHz}$   | 18                   | 18                   | 19                   | 21                 | $\text{pF}$ |
|           |                                  | Output disabled |                    | 2                    | 2                    | 2                    | 4                  |             |

(1) All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.

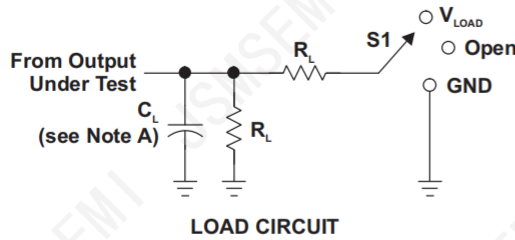**Parameter Measurement Information**


| TEST              | S1         |
|-------------------|------------|
| $t_{PLH}/t_{PHL}$ | Open       |
| $t_{PLZ}/t_{PZL}$ | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$ | GND        |

| $V_{CC}$         | INPUTS   |              | $V_M$      | $V_{LOAD}$        | $C_L$ |      | $R_L$       |              | $V_{\Delta}$ |
|------------------|----------|--------------|------------|-------------------|-------|------|-------------|--------------|--------------|
|                  | $V_I$    | $t_r/t_f$    |            |                   |       |      |             |              |              |
| $1.8V \pm 0.15V$ | $V_{CC}$ | $\leq 2ns$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 15pF  | 30pF | 1M $\Omega$ | 1k $\Omega$  | 0.15V        |
| $2.5V \pm 0.2V$  | $V_{CC}$ | $\leq 2ns$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 15pF  | 30pF | 1M $\Omega$ | 500 $\Omega$ | 0.15V        |
| $3.3V \pm 0.3V$  | 3V       | $\leq 2.5ns$ | 1.5V       | 6V                | 15pF  | 50pF | 1M $\Omega$ | 500 $\Omega$ | 0.3V         |
| $5V \pm 0.5V$    | $V_{CC}$ | $\leq 2.5ns$ | $V_{CC}/2$ | $2 \times V_{CC}$ | 15pF  | 50pF | 1M $\Omega$ | 500 $\Omega$ | 0.3V         |

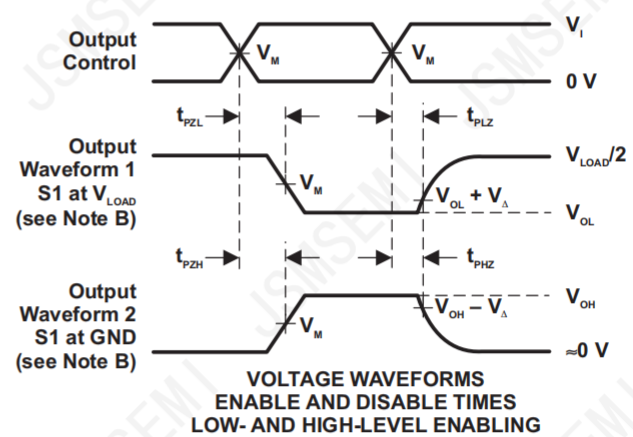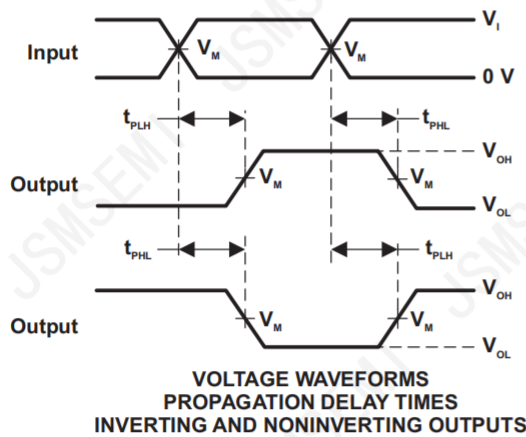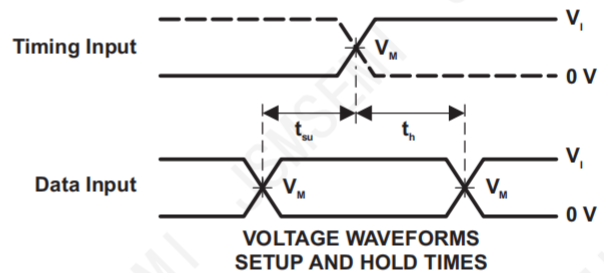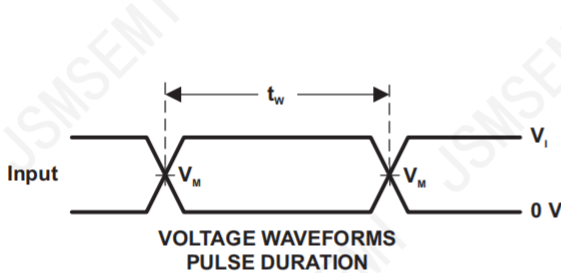

- NOTES:
- A.  $C_L$  includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_o = 50 \Omega$ .
  - D. The outputs are measured one at a time, with one transition per measurement.
  - E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{PZL}$ .
  - F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{PHZ}$ .
  - G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$ .
  - H. All parameters and waveforms are not applicable to all devices.

**Figure 1. Load Circuit and Voltage Waveforms**

## Detailed Description


### Overview

The SN74AHC1G126 device contains a dual buffer gate with output enable control and performs the Boolean function  $Y = A$ .

This device is fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

To ensure the high-impedance state during power up or power down, OE should be tied to GND through a pull-down resistor; the minimum value of the resistor is determined by the current-sourcing capability of the driver.

### Functional Block Diagram

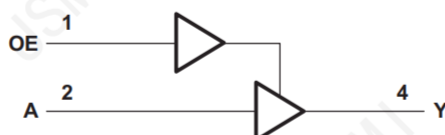

### Feature Description

- 1.65 V to 5.5 V operating voltage range
- Allows down voltage translation
  - 5 V to 3.3 V
  - 5 V or 3.3 V to 1.8 V
- Inputs accept voltages to 5.5 V
  - 5.5-V tolerance on input pin when  $V_{CC} = 0$  V
- $I_{off}$  feature
  - Allows voltage on the inputs and outputs when  $V_{CC}$  is 0 V
  - Able to reduce leakage when  $V_{CC}$  is 0 V

### Device Functional Modes


**Table 1. Function Table**

| INPUTS |   | OUTPUT |
|--------|---|--------|
| OE     | A | Y      |
| H      | H | H      |
| H      | L | L      |
| L      | X | Z      |

### Application Information

The SN74AHC1G126 device is a high-drive CMOS device that can be used as an output enabled buffer with a high output drive, such as an LED application. It can produce 24 mA of drive current at 3.3 V, making it ideal for driving multiple outputs and good for high speed applications up to 100 MHz. The inputs are 5.5-V tolerant allowing it to translate down to  $V_{CC}$ .

### Typical Application

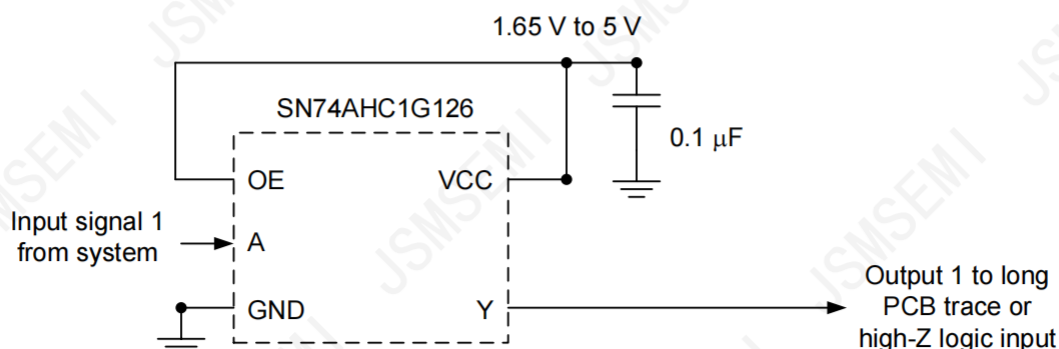

**Figure 2. Application Schematic**

## Power Supply Recommendations

The power supply can be any voltage between the MIN and MAX supply voltage rating located in the *Recommended Operating Conditions* table.

Each  $V_{CC}$  terminal should have a good bypass capacitor to prevent power disturbance. For devices with a single supply, a 0.1- $\mu$ F capacitor is recommended. If there are multiple  $V_{CC}$  terminals, then 0.01- $\mu$ F or 0.022- $\mu$ F capacitors are recommended for each power terminal. It is ok to parallel multiple bypass capacitors to reject different frequencies of noise. Multiple bypass capacitors may be paralleled to reject different frequencies of noise. The bypass capacitor should be installed as close to the power terminal as possible for the best results.


## Layout

### Layout Guidelines

When using multiple bit logic devices, inputs should not float. In many cases, functions or parts of functions of digital logic devices are unused. Some examples are when only two inputs of a triple-input AND gate are used, or when only 3 of the 4-buffer gates are used. Such input pins should not be left unconnected because the undefined voltages at the outside connections result in undefined operational states.

Specified in Figure 3 are rules that must be observed under all circumstances. All unused inputs of digital logic devices must be connected to a high or low bias to prevent them from floating. The logic level that should be applied to any particular unused input depends on the function of the device. Generally they will be tied to GND or  $V_{CC}$ , whichever makes more sense or is more convenient. It is acceptable to float outputs unless the part is a transceiver. If the transceiver has an output enable pin, it will disable the outputs section of the part when asserted. This will not disable the input section of the I/Os so they also cannot float when disabled.



### Layout Example

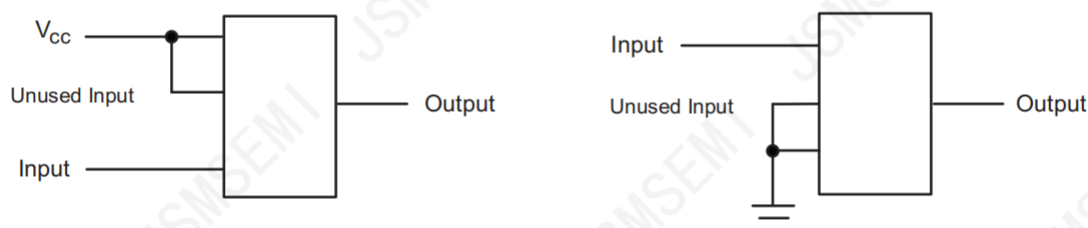



**Figure 3. Layout Diagram**

## Package Information

### SOT-23-5L

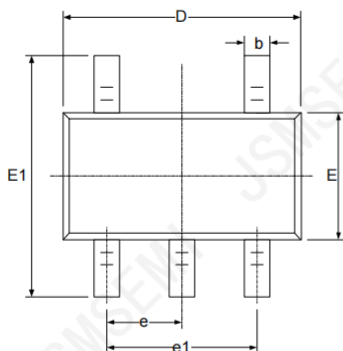



RECOMMENDED LAND PATTERN (Unit: mm)





| Symbol   | Dimensions In Millimeters |       | Dimensions In Inches |       |
|----------|---------------------------|-------|----------------------|-------|
|          | Min                       | Max   | Min                  | Max   |
| A        | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1       | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2       | 1.050                     | 1.150 | 0.041                | 0.045 |
| b        | 0.300                     | 0.500 | 0.012                | 0.020 |
| c        | 0.100                     | 0.200 | 0.004                | 0.008 |
| D        | 2.820                     | 3.020 | 0.111                | 0.119 |
| E        | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1       | 2.650                     | 2.950 | 0.104                | 0.116 |
| e        | 0.950(BSC)                |       | 0.037(BSC)           |       |
| e1       | 1.800                     | 2.000 | 0.071                | 0.079 |
| L        | 0.300                     | 0.600 | 0.012                | 0.024 |
| $\theta$ | 0°                        | 8°    | 0°                   | 8°    |

## Package Information

### SOT-353(SC70-5)

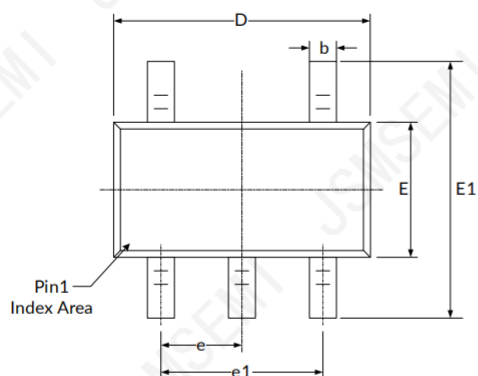

RECOMMENDED LAND PATTERN (Unit: mm)



| Symbol           | Dimensions In Millimeters |       | Dimensions In Inches |       |
|------------------|---------------------------|-------|----------------------|-------|
|                  | Min                       | Max   | Min                  | Max   |
| A                | 0.900                     | 1.100 | 0.035                | 0.043 |
| A1               | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2               | 0.900                     | 1.000 | 0.035                | 0.039 |
| b                | 0.150                     | 0.350 | 0.006                | 0.014 |
| c                | 0.080                     | 0.150 | 0.003                | 0.006 |
| D <sup>(1)</sup> | 2.000                     | 2.200 | 0.079                | 0.087 |
| E <sup>(1)</sup> | 1.150                     | 1.350 | 0.045                | 0.053 |
| E1               | 2.150                     | 2.450 | 0.085                | 0.096 |
| e                | 0.650(BSC)                |       | 0.026(BSC)           |       |
| e1               | 1.300(BSC)                |       | 0.051(BSC)           |       |
| L                | 0.260                     | 0.460 | 0.010                | 0.018 |
| L1               | 0.525                     |       | 0.021                |       |
| θ                | 0°                        | 8°    | 0°                   | 8°    |

## Revision History

| Rev. | Change          | Date      |
|------|-----------------|-----------|
| V1.0 | Initial version | 6/27/2021 |
|      |                 |           |

## Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com