

承认书

APPROVAL SHEET

客户(Customer)	深圳市立创电子商务有限公司
系列(Series)	RVT

日期: 2026/7/29

APPROVED BY

Please Return One Copy with Your Approval

承认后请寄回一份

ADMITTING BY	CHECKED BY	APPROVED BY

PREPARED BY	CHECKED BY	APPROVED BY
欧毅红 R&D	甘慈 R&D	欧翠萍 R&D

Aluminum Electrolytic Capacitor

Customer	深圳市立创电子商务有限公司	SERIES	RVT	SERIES	PUBLISH DATE	2026-07-29
----------	---------------	--------	-----	--------	--------------	------------

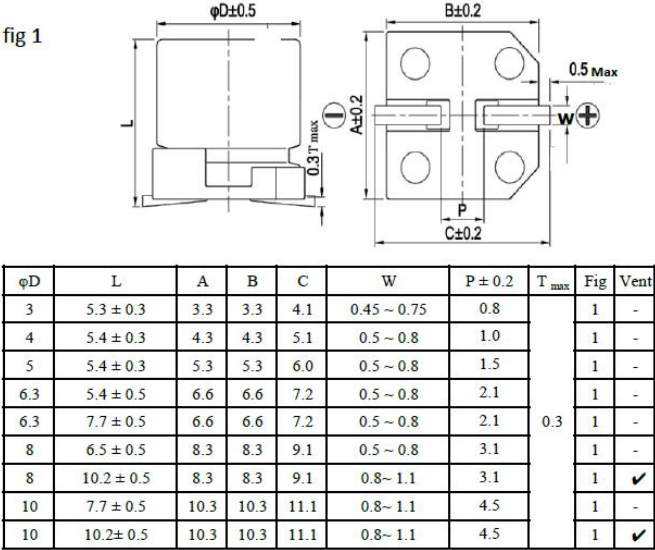


FIG-1

No.	TOPAZCON Part No.	Customer Part No.	Capacitance (uF)	Tolerance On rated Capacitance (%)	Working Voltage (Vdc)	Surge Voltage (Vdc)	Category Temp. Range (°C)	Tanδ @20°C (120 Hz) (Max)	Leakage Current (uA) (2min.)	Impedance @20°C (Ωmax/ 100kHz)	Rated Ripple Current (mA rms) @105°C 120HZ	Endurance @ 105°C (Hours)	Dimensions (mm)		Appearance Drawing No
													DΦ	L	
1	ERVT1A470M0405B1	/	47	±20	10	12	-55~+105	0.24	4.7	/	26	2000	4	5.4	FIG-1
2	ERVT1A101M0505B1	/	100	±20	10	12	-55~+105	0.24	10	/	40	2000	5	5.4	FIG-1
3	ERVT1A101M0605B1	/	100	±20	10	12	-55~+105	0.24	10	/	55	2000	6.3	5.4	FIG-1
4	ERVT1A221M0605B1	/	220	±20	10	12	-55~+105	0.24	22	/	69	2000	6.3	5.4	FIG-1
5	ERVT1A471M0810B1	/	470	±20	10	12	-55~+105	0.24	47	/	214	2000	8	10.2	FIG-1
6	ERVT1C100M0405B1	/	10	±20	16	18.5	-55~+105	0.20	3.0	/	17	2000	4	5.4	FIG-1
7	ERVT1C101M0605B1	/	100	±20	16	18.5	-55~+105	0.20	16	/	63	2000	6.3	5.4	FIG-1


8	ERVT1C221M0607B1	/	220	±20	16	18.5	-55~+105	0.20	35.2	/	110	2000	6.3	7.7	FIG-1
9	ERVT1E470M0605B1	/	47	±20	25	29	-55~+105	0.18	11.75	/	49	2000	6.3	5.4	FIG-1
10	ERVT1E101M0607B1	/	100	±20	25	29	-55~+105	0.18	25	/	93	2000	6.3	7.7	FIG-1
11	ERVT1V470M0605B1	/	47	±20	35	40	-55~+105	0.16	16.45	/	54	2000	6.3	5.4	FIG-1
12	ERVT1V470M0607B1	/	47	±20	35	40	-55~+105	0.16	16.45	/	75	2000	6.3	7.7	FIG-1
13	ERVT1V221M0810B1	/	220	±20	35	40	-55~+105	0.16	77	/	195	2000	8	10.2	FIG-1
14	ERVT1H100M0605B1	/	10	±20	50	58	-55~+105	0.14	5	/	25	2000	6.3	5.4	FIG-1
15	ERVT1H220M0605B1	/	22	±20	50	58	-55~+105	0.14	11	/	43	2000	6.3	5.4	FIG-1
16	ERVT1A221M0605	/	220	±20	10	12	-55~+105	0.24	22	/	69	2000	6.3	5.4	FIG-1

※Test leakage current before testing dissipation factor and capacitance during the electric characteristic test.

REMARKS:	APPROVED BY	CHECKED BY	PREPARED BY
	欧翠萍	甘慈	欧毅红

■ 构造图及材料表 Frame drawing and Material list

构造图 Component Structure

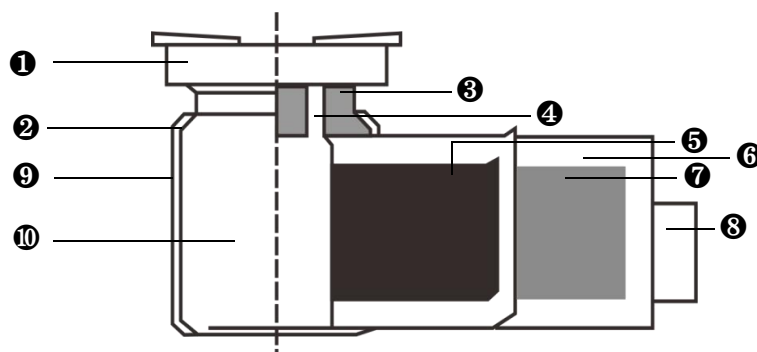

材料表 Material list

NO	部件名称 Parts	材料名称 Material	主要供应厂家名称 Main supply Factory
①	座板 Seat Plate	PPA	湖北鸿信德
②	铝壳 AL- case	99.5%纯度铝 AL - 99.5%	联亿/奥星
③	橡胶塞 Rubber	丁基橡胶 IIR rubber	联华鑫/天华/城南
④	引出线 Lead Wire	铝线 LG3+镀锡铜钢线 AL- wire LG3+Tin- plating of copper cover stee	晶钻/南平/建兴
⑤	阳极箔 AL - foil(+)	99.98%形成铝箔 Formed AL 99.98%	中雅/东阳光/宏远/华峰
⑥	电解纸 Separstor pape	电解电容器纸 Electrolytic Capacitor paper	源润电子/创元
⑦	阴极箔 AL - foil(-)	98.7%腐蚀铝箔 Formed AL 98.7%	飞乐/富奕达
⑧	胶带 Tape	聚丙烯 Polypropylene	云霖/长园/长信源
⑩	电解液 Electrolyte	GBL	深圳新宙邦/TOPAZCON

[illegible]

■ 概述 Scope

本规范规定了所有系列径向引线引出铝电解电容器的技术规范。

This specification covers“ALL series” miniature single-ended aluminium electrolytic capacitors.

■ 参考标准 Standard

本承认书参考 JIS-C-5101-1 和 JIS-C-5101-4 制定

This approval sheet consulted the institute of JIS-C-5101-1 and JIS-C-5101-4.

■ 工作温度范围 Operating temperature range

工作温度范围是电容器在施加额定工作电压条件下，可以长期可靠工作的环境温度范围。

Operating temperature range is the range of ambient temperature at which the capacitor can be operated continuously at rated

■ 测试环境 Condition of test

如果没有其他规定，标准的测试、检验环境条件如下所示：

环境温度：10℃~35℃

相对湿度：≤80% RH

大气压力：860mbar~1060mbar

如果对测试结果有异议，可以在以下条件测试：

环境温度：20±2℃

相对湿度：45%RH~60%RH

大气压力：860mbar~1060mbar

Unless otherwise specified,the standard range of atmospheric conditions for making measurements and tests are as follows:

Ambient temperature : 10℃ to 35℃

Relative humidity : ≤80% RH

ir pressure: 860mbar~1060mbar

If there may be doubt on the results, measurements shall be made within the following limits:

Ambient temperature : 20±2℃

Relative humidity: 45%RH~60%RH

Air pressure : 860mbar~1060mbar

■ 试验方法及要求 Tests

项目 Item	试验条件 Test Conditions	性能要求 Performance	
浪涌电压 Surge Voltage	温度 15~35℃，施加额定浪涌电压，充电 30 秒，放电 5 分 30 秒，共循环 1000 次。 At 15~35℃, applying Surge Voltage 1000 cycles of 30s on and 330s off.	无可见损伤 No visible damage	
		$\Delta C/C$	$\leq \pm 10\%$
		$tg\delta$	$\leq$ 初始规定值 Not more than specified value
耐久性 Load Life	试验温度: 105 $\pm 2^\circ\text{C}$ ， 施加额定温度电压和额定纹波电流。 Application of the rated voltage and the rated ripple current. Test temperature: 105 $\pm 2^\circ\text{C}$ 试验时间 Test time: 2000 hours	$\Delta C/C$	$\pm 30\%$ 初始测量值以内 Within $\pm 30\%$ of initial value
		$tg\delta$	$\leq 300\%$ 初始规定值 Not more than 300% of specified value
		I	$\leq$ 初始规定值 Not more than specified value
贮存 Shelf Life	105℃, 1000 小时。试验后: 恢复 24 小时 1000 hours at +105℃. After test: UR to be > 24h before measurement.	$\Delta C/C$	$\pm 30\%$ 初始测量值以内 Within $\pm 30\%$ of initial value
		$tg\delta$	$\leq 300\%$ 初始规定值 Not more than 300% of specified value
		I	$\leq 200\%$ 初始规定值 Not more than 200% of specified value
可焊性 Solderability	焊料槽温度为 245 $\pm 5^\circ\text{C}$ ，浸渍深度占整个引出线的 95%，浸渍持续时间为 2 秒。 Tank temperature: 245 $\pm 5^\circ\text{C}$; Impregnating depth: $\geq 95\%$ of the total lead wire; Impregnating depth: 2s.	引出端的镀层良好，焊料自由流动，引出端湿润。浸渍面积 95% 以上附着焊锡。 The lead wire is coated by tin and wet. At least 95% of Circumferential surface of the dipped portion of termination shall be covered with new solder	
耐焊接热 Resistance to soldering heat	方法: 焊料槽温度为 260 $\pm 5^\circ\text{C}$ ，浸渍深度 6mm，浸渍持续时间为 10 秒。 Tank temperature: 260 $\pm 5^\circ\text{C}$; Impregnating depth: 6mm; Impregnating time: 10s.	无可见损伤 No visible damage	
		$\Delta C/C$	$\leq \pm 10\%$
		$tg\delta$	$\leq$ 初始规定值 Not more than specified value
稳态湿热 Stable Humidity	试验温度: +40℃, 湿度: 90~95%, 不施加电压 240 $\pm 8\text{h}$ at 40℃, RH 90 to 95%, 240 $\pm 8\text{h}$ no voltage applied.	无可见损伤和电解液漏出，且标志清晰 No visible damage; no leakage of electrolyte; marking legible	
		$\Delta C/C$	$\leq \pm 5\%$
		$tg\delta$	$\leq$ 初始规定值 Not more than specified value
耐振性 Resistance to vibration	频率: 10-55-10 Hz/分 Frequency: From 10 to 55 Hz and return to 10 Hz, shall be transferred in 1 Min Total Amplitude: 1.5 mm 条件: X. Y. Z 方向各 2 小时 Direction and duration of vibration: 3 orthogonal directions mutually each for 2 hours Total 6 hours.	无可见损伤和电解液漏出，且标志清晰 No visible damage; no leakage of electrolyte; marking legible	
		$\Delta C/C$	$\leq \pm 5\%$

■ 试验方法及要求 Tests

项目 Item	试验条件 Test Conditions	性能要求 Performance																								
高低温特性 Characteristic at High and low temperature	电容器根据下表的次序处理 The capacitor shall be subjected in turn to the procedures specified below. <table border="1"> <thead> <tr> <th>阶段 Step</th><th>温度 Temperater</th><th>时间 Time</th></tr> </thead> <tbody> <tr> <td>1</td><td>20 ± 2℃</td><td>热平衡状态 thermal stability</td></tr> <tr> <td>2</td><td>-55 ± 3℃</td><td>*2 hours</td></tr> <tr> <td>3</td><td>20 ± 2℃</td><td>热平衡状态 thermal stability</td></tr> <tr> <td>4</td><td>105 ± 2℃</td><td>*2 hours</td></tr> <tr> <td>5</td><td>20 ± 2℃</td><td>热平衡状态 thermal stability</td></tr> </tbody> </table> *电容器放置在每一温度下，待阻抗或电容量稳定后方可测试 *The capacitor should be stored at each temperature until measured impedance are stabilized. 阶段 1：测定容量，损失角正切，阻抗值，漏电流 Step 1: Measured leakage current, impedance, dissipation factor and capacitance 阶段 2：放置 2 小时后，达到热平衡状态再测。 Step 2 : After the capacitor being stored for 2 hours, impedance shall be Measured. The measurement shall be made at thermal stability. 阶段 4：放置 2 小时后，达到热平衡状态再测 Step 4 : After the capacitor being stored for 2 hours, Leakage Current shall be Measured. The measurement shall be made at thermal stability.	阶段 Step	温度 Temperater	时间 Time	1	20 ± 2℃	热平衡状态 thermal stability	2	-55 ± 3℃	*2 hours	3	20 ± 2℃	热平衡状态 thermal stability	4	105 ± 2℃	*2 hours	5	20 ± 2℃	热平衡状态 thermal stability	<table border="1"> <tbody> <tr> <td>阶段 2 Step 2</td><td>阻抗比(对阶段 1) Impedance ratio</td><td>≤3</td></tr> <tr> <td>阶段 4 Step 4</td><td>漏电流 Leakage Current</td><td>≤8 倍规定值 Not more than 800% of specified value</td></tr> </tbody> </table>	阶段 2 Step 2	阻抗比(对阶段 1) Impedance ratio	≤3	阶段 4 Step 4	漏电流 Leakage Current	≤8 倍规定值 Not more than 800% of specified value
阶段 Step	温度 Temperater	时间 Time																								
1	20 ± 2℃	热平衡状态 thermal stability																								
2	-55 ± 3℃	*2 hours																								
3	20 ± 2℃	热平衡状态 thermal stability																								
4	105 ± 2℃	*2 hours																								
5	20 ± 2℃	热平衡状态 thermal stability																								
阶段 2 Step 2	阻抗比(对阶段 1) Impedance ratio	≤3																								
阶段 4 Step 4	漏电流 Leakage Current	≤8 倍规定值 Not more than 800% of specified value																								

■ 试验方法及要求 Tests

项目 Item	试验条件 Test Conditions	性能要求 Performance																								
端子强度 Terminal Strength	抗拉强度: 沿电容器端子引线方向施加拉力(如下表), 10±1 秒 <table><tr><td>引线 直径Φ</td><td>0.45</td><td>0.5</td><td>0.6</td><td>0.8</td><td>1</td></tr><tr><td>拉力N</td><td colspan="2">5</td><td colspan="2">10</td><td>20</td></tr></table> Tensile strength of terminal: A static load(stated in the table above)shall be applied to the terminal in the axial direction and acting in a direction away fromthe body for 10±1 sec.. 端子抗弯强度: 在电容器引线施加固定重力（如下表），然后，将电容体弯折 90°后回到原位，再向相反方向弯折 90°后回到原位。上述过程在 5 秒内完成。 <table><tr><td>引线 直径Φ</td><td>0.45</td><td>0.5</td><td>0.6</td><td>0.8</td><td>1</td></tr><tr><td>拉力N</td><td colspan="2">2.5</td><td colspan="2">5</td><td>10</td></tr></table> Bending strength of terminal: Hang the specified dead weight(stated in the table above),then bend the body through 90°, return to the original position. Next bend it in opposite direction through 90° with the same speed,again return to the original position. Complete this operation in about 5 sec.	引线 直径Φ	0.45	0.5	0.6	0.8	1	拉力N	5		10		20	引线 直径Φ	0.45	0.5	0.6	0.8	1	拉力N	2.5		5		10	测定静电容量时，无接触不良，开路和短路现象，另外无机械损伤和端子损伤。 When the capacitance is measured ,there shall be no intermittent contacts or open –or short –circuiting . There shall be no such mechanical damage etc. as terminal damage
引线 直径Φ	0.45	0.5	0.6	0.8	1																					
拉力N	5		10		20																					
引线 直径Φ	0.45	0.5	0.6	0.8	1																					
拉力N	2.5		5		10																					
压力释放 Pressure relief	直流试验 D.C. test 施加同额定电压相等的反电压。 Reversed polarity D.C. rated voltage shall be applied to the capacitor. 注: 1.试验开始 30 Min 后,防爆装置不动作时,停止试验。 2.该规定适用于铝壳直径6.3mm 以上的电容器。 Note: 1. When the pressure relief device does not open even 30 min after commencement of this test, the test may be ended. 2. This requirement applies to capacitors with a diameter of 6.3mm or more	防爆装置释放时，无燃烧、无爆炸或铝壳和封口材料的分离。 The pressure relief device shall open in such a way as to avoid any danger of fire or explosion of Capacitor elements .																								

提示: Notes:

*温度系数不使用在寿命计算公式中,只能作为参考

Temperature coefficient is not used in life formula but for reference.

*每升高5℃,纹波电流产生的温升使电容器的使用寿命减半,从而降低电容器的使用寿命.当实际使用中需延长寿命性能时,必须降低rms纹波电流。

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5℃ rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.

■铝电解电容器的使用注意事项 Guidelines For Using Aluminum Electrolytic Capacitor

为使您获得电解电容器的最佳性能和延长电解电容器的使用寿命，在使用电解电容器前，请务必阅读本注意事项。

Upon using Aluminum Electrolytic Capacitors, please proper handing and observing to following important points will insure optimum capacitor performance and long life.

①直流电解电容器是有极性的.DC electrolytic capacitors are polarized.

确定极性，极性标志在电容器的基体上。以免因极性反可能引起电路短路或电容器损坏，当极性不固定或不确定的，使用 双极性电容器。

注意直流电解电容器不能使用于交流。

Make sure of the polarity .The polarity is marked on the body of the capacitor .Application of the reversed voltage cause a short circuit or damage to the capacitor .

Use bipolar capacitors when the polarity is not determined or unknown . Note that DC electrolytic capacitors can not be used for AC application .

②使用电压不要大于额定电压.Do not apply voltage greater than rated voltage .

使用电压大于额定电压，漏电流会增大，可能损坏电容器。建议工作电压为额定电压的70~80%，电容器在建议的工作电压下使用可延长电容器的寿命。

If a voltage exceeding the rated voltage is applied ,the leakage current will increase , which damage the capacitor . Recommended working voltage is 70 to 80 percent of tatted voltage . Using capacitors at recommended working voltage prolongs capacitor life .

③不要使过大的纹波电流通过电容器.Do not allow excessive ripple current through the capacitor .

流过电容器的纹波电流超过许可值，将会引起电容器发热，电容量减少，损害电容器。通过电容器的纹波电流不要大于允许值。

The flow of ripple current over permissible ripple current will cause heat of the capacitor ,which may decrease the capacitance and damage the capacitor .

ripple current on the capacitor must be at or bellow allowable level .

④快速的充放电电路中,使用专门设计的电容器.Use specially designed capacitors for the circuits where charge and discharge are frequency repeated .

在经受快速的周期性充放电电路中，电容器可能受损害，它的寿命因容量下降、温升等原因而缩短，在这种电路中，一定要使用专门设计的电容器。

In the circuit subjected to rapid charge cycles ,capacitors may be damaged ,its life may be shortened by capacitance decrease ,heat rise , ect .

Be sure and use special capacitors in these applications .

⑤工作温度范围.Operating temperature range .

电容器的特性随工作温度而变化，在温度较高的情况下，容量、漏电流增大， $\text{tg}\delta$ 减少；在低温情况下，容量和漏电流下降， $\text{tg}\delta$ 增大。

电容器在较低的温度下使用会确保延长寿命。

The characteristics of capacitors change with the operating temperature .The capacitance and leakage current increase and decrease at higher temperatures .

The capacitance and leakage current decrease and $\text{tg}\delta$ increase lower temperature .Usage at lower temperature will ensure longer life .

⑥核对工作频率.Check operating frequency .

电解电容器的容量通常是在 100Hz 或 120Hz 下测得的。然而要记住容量随频率的升高而下降， $\text{tg}\delta$ 随频率的升高而增大，并使周围温度升高。

The capacitance of electrolytic capacitors is usually measured at 100Hz or 120Hz . However , remember that capacitance decrease and $\text{tg}\delta$ increase as the applied frequency becomes higher whereas the ambient temperature becomes higher .

⑦长时间存放的电容器，在使用前加额定直流电压处理. Apply rated DC voltage treatment to the capacitors which have been stored for a long time

长时间的存放，实际对电容器的容量和 $\text{tg}\delta$ 没有多大的影响，然而往往会使漏电流增大，耐压降低。长时间存放后的电容器处理，首先逐渐施加

直流电压至额定电压，然后再使用。

Long periods of storage have virtually no effect no a capacitor's capacitance and $\text{tg}\delta$.Such periods tend however ,to increase leakage current and decrease

withstand voltage .After removing capacitors from long-duration storage ,first apply a gradually increasing DC voltage to rated voltage and then use them.

⑧电容器外壳与阴极端是不绝缘的.The capacitor case is not insulated from the cathode terminal .

电容器外壳与阴极端是通过电解液连接的，如果电容器的外壳必须与线路绝缘，则电容器的安装位置处，一定要采取绝缘出措施。

The capacitor's case and cathode terminal connect through the electrolyte.If the case is to be completely insulated,that insulation must be at the capacitor's mounting point.

⑨电容器的端子或引线上不要施加过大的力.Do not apply excessive force to the terminals and leads.

过大的力施加到端子和引线上，可能引起引线的断裂或端子分裂，转而引起内部连接的破坏。

The excessive strong force applied to the terminals and lead wires may cause leads to break or terminals to separate and ,in turn ,cause the internal contact to fail.

⑩关于焊接以后的清洗. Cleaning after soldering

① 电容器不能用卤化有机物系列的清洗剂进行清洗。如果必须进行清洗，请使用能够保证电容器质量的清洗剂。


The aluminum electrolytic capacitors should be free of halogenated solvents during board cleaning after soldering. Use solvent proof capacitors when halogenated solvents are used.

② 请不要让固定剂及镀层（涂层剂）将电容器封口部位（端子一侧）全部封住。

Do not cover up all the sealing area of capacitors with adhesives、fixative or coating materials (coating agent), make coverage only partial.

■ 焊接温度及注意事项 Solder temperature and notes

●无铅回流焊 Reflow (lead-free)

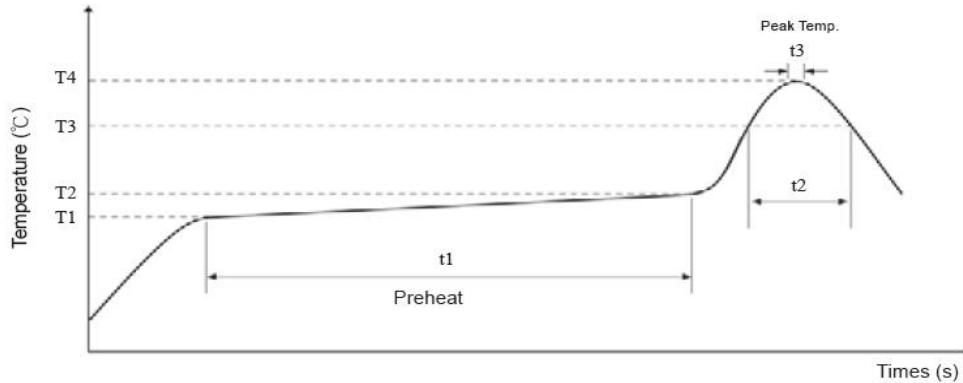

Size	Voltage	Preheat		Time maintained above 230°C		Peak temp.		Reflow number
		Temp.(T1~T2)	Time(t1)	Temp.(T3)	Time (t2)	Temp.(T4)	Time (t3)	
Φ3~ Φ6.3	4 to 50V	150°C to 180°C	120sec. max.	above 230°C	30 sec. max	260°C max.	10 sec.	2 times or less
	63 to 100V			above 230°C	30 sec. max	255°C max.	5 sec.	2 times or less
Φ8~ Φ10	4 to 50V			above 230°C	30 sec. max	250°C max.	5 sec.	2 times or less
	63 to 450V			above 230°C	30 sec. max	240°C max.	5 sec.	2 times or less
Φ12.5~ Φ18	4 to 50V			above 230°C	20 sec. max.	245°C max	5 sec.	2 times or less
	63 to 450V			above 230°C	-	235°C max	5 sec.	2 times or less

注意事项 notes:

- ①产品的位置不同(PCB边缘部的温度上升高于PCB中央部。)
- ②零件数量、安装密度不同。(零件数量越少,安装密度越低,温度上升越大。)
- ③使用PCB种类不同(同尺寸、厚度时,为了得到相同的PCB温度,需要将陶瓷PCB的温度设定得比玻璃环氧树脂PCB低,但这样零件受到的应力变大。)
- ④PCB的厚度不同(PCB越厚,和③同样,需要将炉内温度设定得越高。)
- ⑤PCB的大小不同(PCB越大,和③同样,需要将炉内温度设定得越高。)
- ⑥焊剂厚度不同。(当焊接厚度非常薄时,需要适当调整温度和链速。)
- ⑦利用红外线进行焊接时,加热器的位置不同(下部加热和电热板同样,电容器的破损将减少。)
- ⑧随焊接条件变化的漏电流,可能会在焊接后增大(数 mA 左右)。此外,通过加载电压使用,漏电流会逐渐变小。
- ⑨尽量避免回流焊 2 次,在执行第 2 次回流焊时,请确认电容器表面温度已冷却至 5 ~ 35℃,切勿回流焊3次。


●烙铁焊接 Iron soldering

烙铁作业:最高温度: 350 ± 5℃, 焊接时间: 3±0.5 秒。

■ 编带尺寸 Carrier Tape

Taping of Chip Type Aluminum Electrolytic Capacitor and Size

unit: (mm)

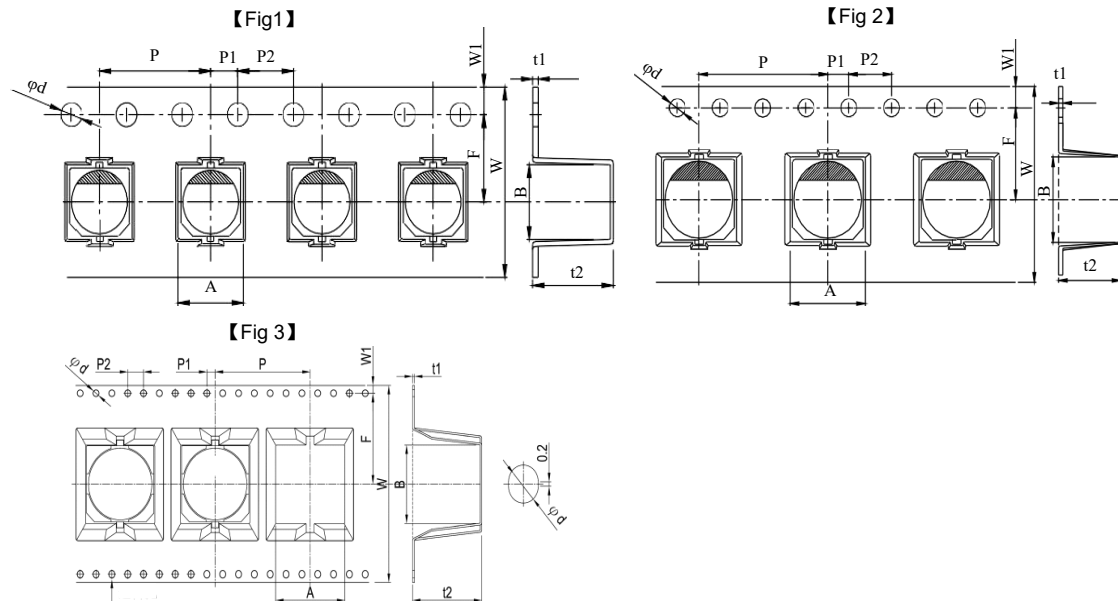


$\phi D \times L$	A	B	ϕd	F	P	P1	P2	t1	t2	W	W1	Fig			
$3 \sim 4 \times 4.5 \sim$	4.7	4.7	1.5	5.5	8	2.0	4.0	0.4	5.8	12	1.75	1			
4×5.7	4.7	4.7			8				6.2						
$5 \times 4.5 \sim 5.3$	5.7	5.7			12				5.8						
$5 \times 5.7 \sim 6.0$	5.7	5.7			12				6.2						
$6.3 \times 4.5 \sim 5.3$	7.0	7.0		7.5	12				5.8	16		2			
$6.3 \times 5.7 / 5.8$									6.2						
6.3×5.9									6.2						
6.3×7.0									6.8						
6.3×7.7	8.7	8.7							11.5				16	8.3	
8×6.5														6.8	24
8×6.7														6.8	
8×10														11	
8×12	10.7	10.7		14.2	24				12.5	32			3		
10×7.7									10						
10×10									11						
10×12.6									13						
12.5×13.5	13.4	13.4		20.2	28			0.5	15	44					
12.5×13.5	13.7	13.7			24				15						
12.5×16	13.4	13.4			24				17.5						
12.5×16	13.7	13.7			24				17.5						
16×16.5	17.5	17.5		28	17.5										
16×16.5	17.5	17.5		28	17.5										
16×21.5	17.5	17.5		28	22.5										
18×16.5	19.5	19.5		32	17.5										
18×21.5	19.5	19.5		32	22.5										
Tolerance	± 0.2	± 0.2	$+ 0.1 - 0$	± 0.1	± 0.1	± 0.1	± 0.1	± 0.1	± 0.2	± 0.3	± 0.15				

Taping of Chip Type Aluminum Electrolytic Capacitor and Size


unit: (mm)

■ 卷盘尺寸 Reel Size

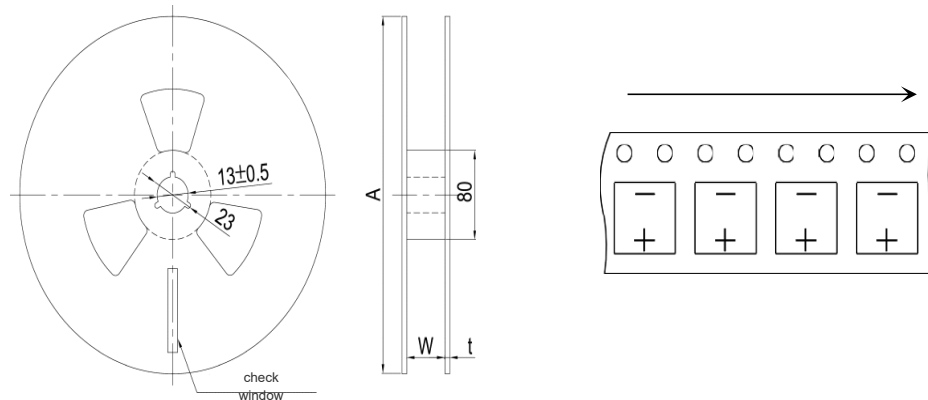

Size ϕ	3 ~ 4 ϕ	5 ϕ	6.3 ϕ	8 ϕ ×6.5 ~ 7.0L	8 ϕ ×10 ~ 12L	10 ϕ	12.5 ϕ	16 ~ 18 ϕ
W	14	14	18	18	26	26	34	46
A	380	380	380	380	380	380	380	380
t	3	3	3	3	3	3	3	3

■ 包装数量 Parking Specification



产品尺寸 φ×L	外箱规格 Carton L*W*H (mm)	一盘数量 (Pcs) /Reel	盘数 Reels	外箱数量 Quantity (Pcs)
4×5.4	395*390*195	2000	10	20000
5×5.4		1000	10	10000
6.3×5.4	395*390*235	1000	10	10000
6.3×7.7		1000	10	10000
6.3×10.2	395*390*315	500	10	5000
8×6.5~7	395*390*235	1000	10	10000
8×10.2	395*390*315	500	10	5000
8×12		400	10	4000
10×10.2		400	10	4000
10×12.6		400	10	4000