


Quad TRI-STATE[®] Line Driver

General Description

DS3487 is quad RS-422 driver features four independent drivers which comply with EIA Standards for the electrical characteristics of balanced voltage digital interface circuits. The outputs are TRI-STATE structures which are forced to a high impedance state when the appropriate output control pin reaches a logic zero condition. All input pins are PNP buffered to minimize input loading for either logic one or logic zero inputs.

Features


- Four independent drivers
- TRI-STATE[®] outputs
- Fast propagation times (typ 10 ns)
- TTL compatible
- 5V supply
- Output rise and fall times less than 15 ns
- Pin compatible with DS8924 and MC3487

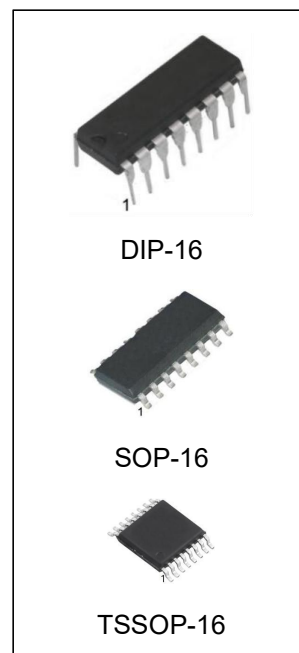


Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
DS3487N	DIP-16	DS3487	TUBE	1000/box
DS3487M/TR	SOP-16	DS3487	REEL	2500/reel
DS3487MT/TR	TSSOP-16	DS3487	REEL	2500/reel

Block and Connection Diagrams

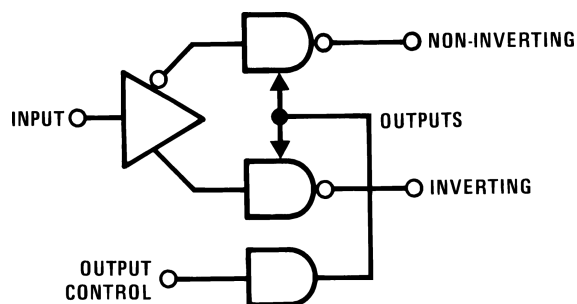

Dual-In-Line Package

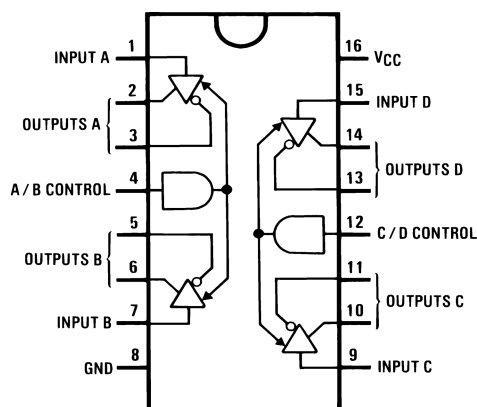

Top View

(DIP-16/SOP-16/TSSOP-16)

Truth Table

Input	Control Input	Non-Inverting Output	Inverting Output
H	H	H	L
L	H	L	H
X	L	Z	Z

L = Low logic state

H = High logic state

X = Irrelevant

Z = TRI-STATE(high impedance)

Absolute Maximum Ratings (Note 2)

Condition	Min	Max
Supply Voltage	8V	
Input Voltage	5.5V	
Storage Temperature	-65°C	+150°C
Maximum Power Dissipation (Note 1) at 25°C		
Molded DIP Package.	1476 mW	
SOP Package	1051 mW	
Lead Temperature (Soldering, 10 seconds)	260°C	

Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured.

Operating Conditions

	Min	Max	Units
Supply Voltage, VCC	4.75	5.25	V
Temperature(TA)	-40	85	°C

Electrical Characteristics (Notes 3, 4, 5, 6)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{IL}	Input Low Voltage				0.8	V
V_{IH}	Input High Voltage		2.0			V
I_{IL}	Input Low Current	$V_{IL} = 0.5V$			-200	μA
I_{IH}	Input High Current	$V_{IH} = 2.7V$			50	μA
		$V_{IH} = 5.5V$			100	μA
V_{CL}	Input Clamp Voltage	$I_{CL} = -18\text{ mA}$			-1.5	V
V_{OL}	Output Low Voltage	$I_{OL} = 48\text{ mA}$			0.5	V
V_{OH}	Output High Voltage	$I_{OH} = -20\text{ mA}$	2.5			V
I_{OS}	Output Short-Circuit Current		-40		-140	mA
I_{OZ}	Output Leakage Current (TRI-STATE)	$V_O = 0.5V$			-100	μA
		$V_O = 5.5V$			100	μA
I_{OFF}	Output Leakage Current Power OFF	$V_{CC} = 0V$			100	μA
		$V_O = -0.25V$			-100	μA
$ V_{OS} - V_{OS} $	Difference in Output Offset Voltage				0.4	V
V_T	Differential Output Voltage		2.0			V
$ V_T - V_T $	Difference in Differential Output Voltage				0.4	V
I_{CC}	Power Supply Current	Active		50	80	mA
		TRI-STATE [®]		35	60	mA

Switching Characteristics

$V_{CC} = 5V$, $T_A = 25^\circ C$

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{PHL}	Input to Output			10	15	ns
t_{PLH}	Input to Output			10	15	ns
t_{THL}	Differential Fall Time			10	15	ns
t_{TLH}	Differential Rise Time			10	15	ns
t_{PHZ}	Enable to Output	$R_L = 200\Omega$, $C_L = 50\text{ pF}$		17	25	ns
t_{PLZ}	Enable to Output	$R_L = 200\Omega$, $C_L = 50\text{ pF}$		15	25	ns
t_{PZH}	Enable to Output	$R_L = \infty$, $C_L = 50\text{ pF}$, S1 Open		11	25	ns
t_{PZL}	Enable to Output	$R_L = 200\Omega$, $C_L = 50\text{ pF}$, S2 Open		15	25	ns

Note 1: Derate DIP molded package 11.9mW/°C above 25°C. Derate SOP package 8.41mW/°C above 25°C

Note 2: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the device should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.



Note 3: Unless otherwise specified min/max limits apply across the 0°C to +70°C range for the DS3487. All typicals are given for $V_{CC} = 5V$ and $T_A = 25^\circ C$.

Note 4: All currents into device pins are positive, all currents out of device pins as negative. All voltages are referenced to ground unless otherwise specified.

Note 5: Only one output at a time should be shorted.



Note 6: Symbols and definitions correspond to EIA RS-422, where applicable.

AC Test Circuits and Switching Time Waveforms

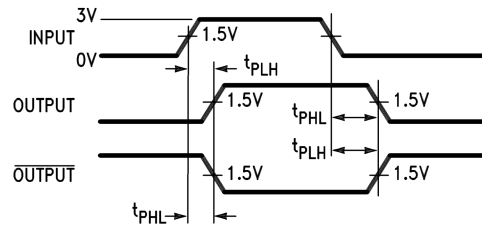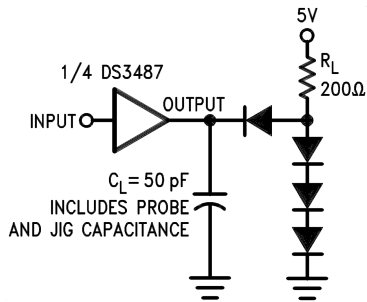

Input pulse: $f = \text{MHz}$, 50%; $t_r = t_f = 15 \text{ ns}$.

FIGURE 1. Propagation Delays

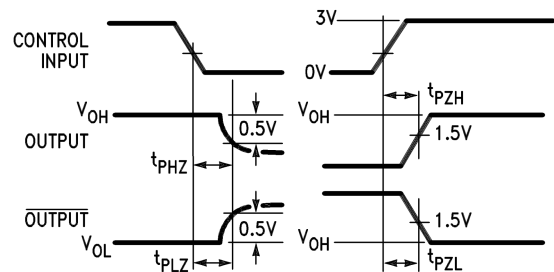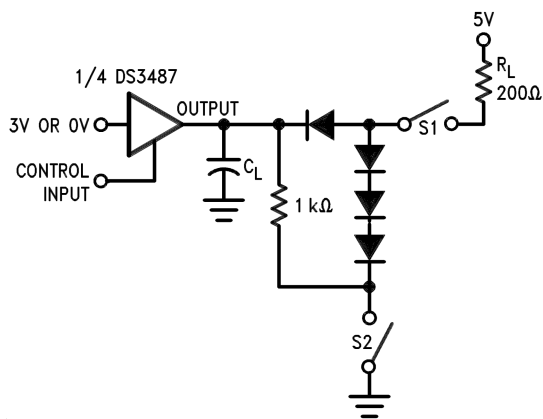

Input pulse: $f = \text{MHz}$, 50%; $t_r = t_f < 15 \text{ ns}$.



S1 = open for t_{PZH}

S2 = open for t_{PLZ}

S1 and S2 closed except as noted.

CL includes probe and jig capacitance.

FIGURE 2. TRI-STATE Enable and Disable Delays

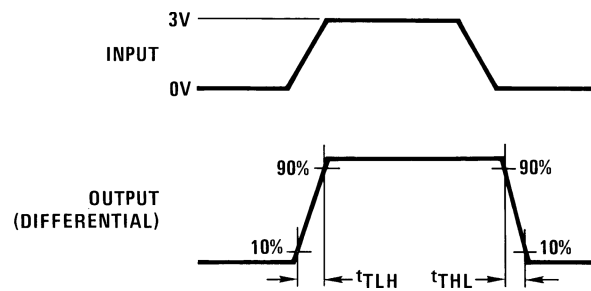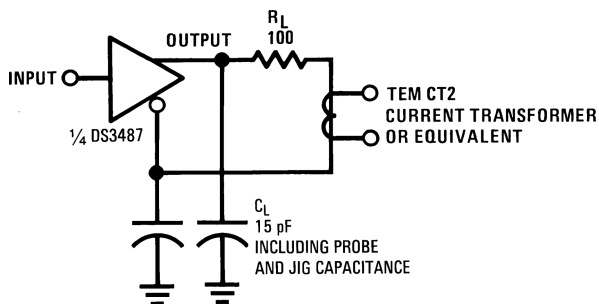


Input pulse: $f = \text{MHz}$, 50%; $t_r = t_f < 15 \text{ ns}$.

FIGURE 3. Differential Rise and Fall Times


Physical Dimensions

SOP-16

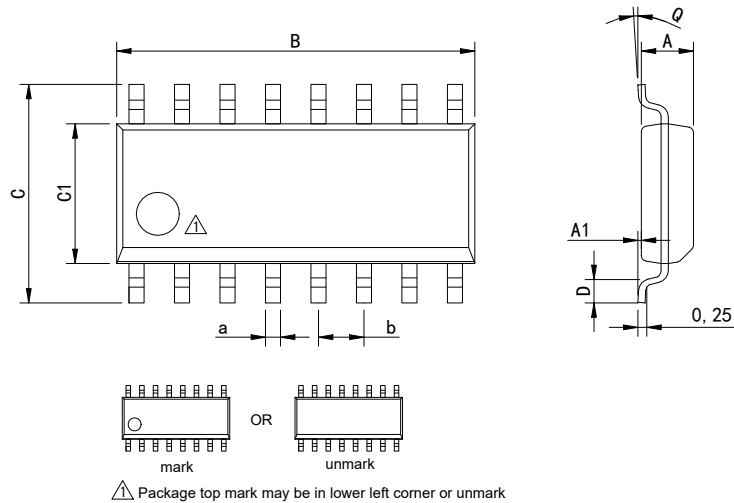

Dimensions In Millimeters(SOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	9.80	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	10.0	6.20	4.00	0.80	8°	0.45	


DIP-16

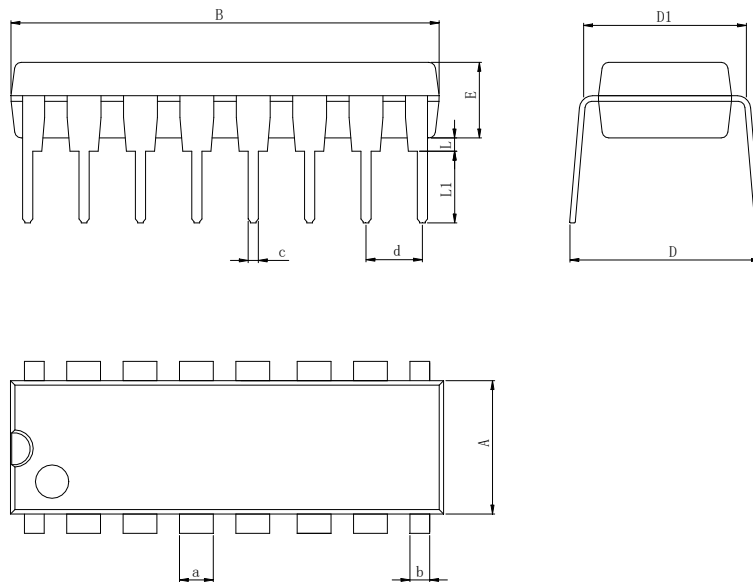

Dimensions In Millimeters(DIP-16)											
Symbol:	A	B	D	D1	E	L	L1	a	b	c	d
Min:	6.10	18.94	8.10	7.42	3.10	0.50	3.00	1.50	0.85	0.40	2.54 BSC
Max:	6.68	19.56	10.9	7.82	3.55	0.70	3.60	1.55	0.90	0.50	

Physical Dimensions

TSSOP-16

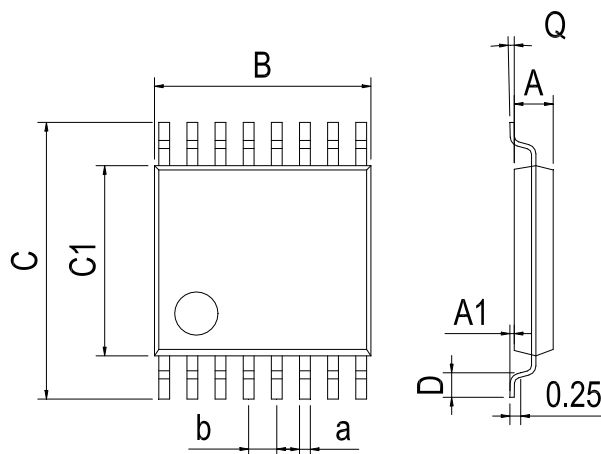

Dimensions In Millimeters(TSSOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	0.85	0.05	4.90	6.20	4.30	0.40	0°	0.20	0.65 BSC
Max:	0.95	0.20	5.10	6.60	4.50	0.80	8°	0.25	

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2016-3	New	1-9
V1.1	2019-9	Modify the package dimension diagram TSSOP-16、 Update encapsulation type、 Updated DIP-16 dimension	1、 6、 7
V1.2	2020-7	Add annotation for Maximum Ratings.	3
V1.3	2024-11	Update Lead Temperature	3
V1.4	2025-11	Update important statements、 Update SOP-16 Dimension drawing	6、 9

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.