

78L05APT

DATASHEET

Specification Revision History:

Version	Date	Description
V1.0	2020/06	New
V1.1	2021/05	Modify Ordering Information
V1.2	2023/02	Modify Ordering Information
V1.3	2025/05	Add application precautions and overall typesetting.


Features

- ※ 3-Terminal Regulators
- ※ Output Current Up to 100mA
- ※ No External Components
- ※ Internal Thermal Overload Protection
- ※ Internal Short-Circuit Limiting
- ※ Direct Replacement for Fairchild μ A78L00 Series

Description

This series of fixed-voltage monolithic integrated circuit voltage regulators is designed for a wide range of applications. These applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power-pass elements to make high-current voltage regulators. Each of these regulators can deliver up to 100mA of output current. The internal limiting and thermal shutdown features of these regulators make them essentially immune to overload. When used as a replacement for a Zener diode-resistor combination, an effective improvement in output impedance can be obtained together with lower-bias current.

The appearance of the product



- 1、 OUTPUT
- 2、 GND
- 3、 INPUT

TO-92

Ordering Information

Product Model	Package Type	Packing	Packing Qty
78L05APT	TO-92	Bulk	1000PCS/BAG
78L05	TO-92	Bulk	1000PCS/BAG

Absolute maximum ratings over operating temperature range (unless otherwise noted)

	78L03 thru 78L10	78L12 thru 78L18	78L24	UNIT
Input voltage	30	35	40	V
Operating free-air, case, or virtual junction temperature range	-40 to 125	-40 to 125	-40 to 125	°C
Storage temperature range	-65 to 150	-65 to 150	-65 to 150	
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	260	260	260	

Recommended operating conditions

Parameter		MIN	MAX	UNIT
Input voltage, V_i	78L03	5.5	18	V
	78L33	5.5	18	
	78L05	7	20	
	78L06	8	20	
	78L08	10.5	23	
	78L09	11.5	24	
	78L10	12.5	25	
	78L12	14.5	27	
	78L15	17.5	30	
	78L18	20.5	33	
	78L24	26.5	39	
Output current, I_o			100	mA
Operating virtual junction temperature, T_j		0	125	°C

78L05 electrical characteristics at specified virtual junction


temperature, $V_I=10V$, $I_O=40mA$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS*		78L05			UNIT
			MIN	TYP	MAX	
Output voltage**		25 °C	4.8	5	5.2	V
	$I_O=1mA$ to 40mA	0 to 125 °C	4.75	5	5.25	
	$V_I=7V$ to 20V		4.75	5	5.25	
Input regulation	$V_I=7V$ to 20V	25 °C		32	150	mV
	$V_I=8V$ to 20V			26	100	
Ripple rejection	$V_I=8V$ to 18V, $f=120Hz$	25 °C	41	49		dB
Output regulation	$I_O=1mA$ to 100mA	25 °C		15	60	mV
	$I_O=1mA$ to 40mA			8	30	
Output noise voltage	$f=10Hz-100Hz$	25 °C		42		μV
Dropout voltage		25 °C		1.7		V
Bias current		25 °C		1.9	6	mA
		125 °C			5.5	
Bias current change	$V_I=8V$ to 20V	0 to 125 °C			1.5	
	$I_O=1mA$ to 40mA				0.1	

|

Outline Dimensions

TO-92

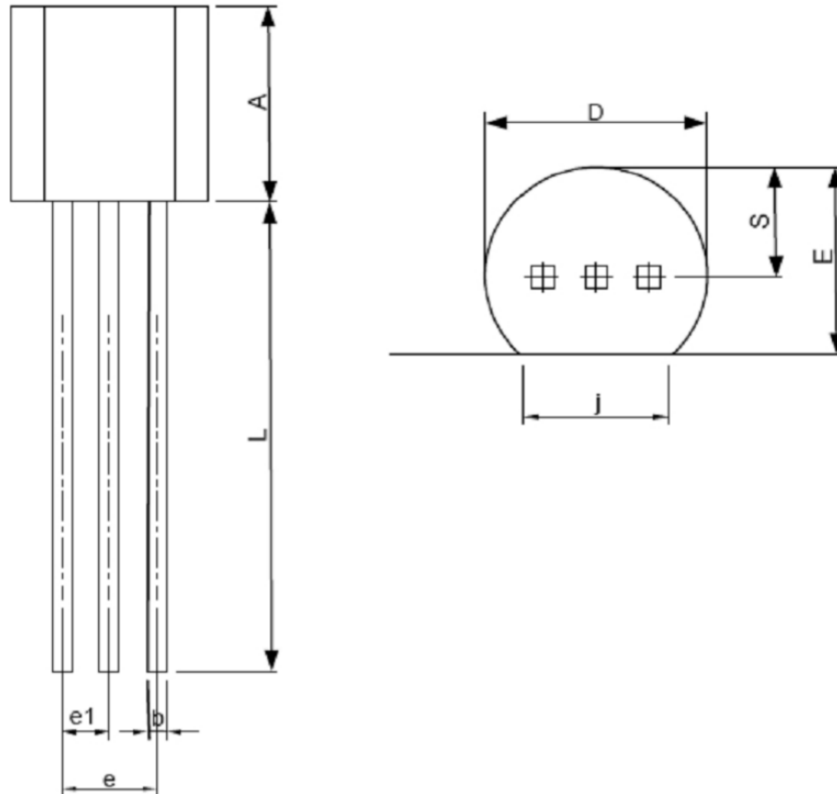

Symbol				
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	4.32	5.33	0.170	0.210
b	0.41	0.53	0.016	0.021
D	4.45	5.20	0.175	0.205
E	3.18	4.19	0.125	0.165
e	2.42	2.66	0.095	0.105
e1	1.15	1.39	0.045	0.055
J	3.43	4.00	0.135	0.157
L	12.70	15.00	0.500	0.591
S	2.03	2.66	0.080	0.105

Important Notice

- Green Micro chip reserves the right to change products and documents without notice. Customers should obtain and verify the completeness of the latest technical information before placing orders. Meanwhile, Green Micro chip shall not assume any responsibility or obligation for non-officially revised documents.
- Any parameters in the entire product specification are for reference only, and actual application testing shall prevail. When customers use the products for system design, they must comply with safety regulations and independently assume the following responsibilities: selecting suitable Green Micro chip products according to application requirements; completing design verification and full-link testing of the application; and ensuring that the application complies with safety regulations or other requirements of the target market. Customers shall bear all personal or property losses caused by design defects or illegal operations, which shall have no relation to Green Micro chip.
- Green Micro chip products are prohibited from being used in scenarios such as life support, military equipment, and key aerospace applications. All accidents and legal liabilities arising from out-of-scope use shall be borne by the user, and Green Micro chip shall not be held responsible.
- All technical resources of Green Micro chip (including data sheets and reference designs) are provided "as is", without guarantee of no defects or universality, and without any express or implied warranties. The documents are only authorized for product development and research described in this document. Unauthorized use of intellectual property, public reproduction, and reverse engineering are strictly prohibited. All claims and losses caused by illegal use shall be borne by the user, and Green Micro chip shall not be liable.