


Surface mount transient voltage suppressor power 1500watts

Stand-Off Voltage: 5.0V~440V

FEATURES

- ◆For surface mounted applications in order to optimize board space.
- ◆Low profile package.
- ◆Glass passivated junction.
- ◆Low inductance.
- ◆Plastic package has Underwriters Laboratory Flammability.

Pinning

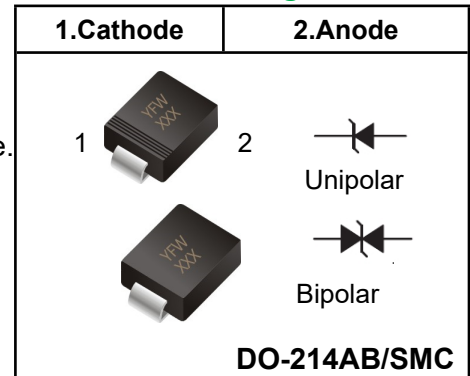

MECHANICAL DATA

- ◆Case: DO-214AB/SMC
- ◆Terminals: Solderable per MIL-STD-750, Method 2026
- ◆Approx. Weight: 0.22g / 0.0077oz

Maximum Ratings and Electrical characteristics

Ratings at 25 ambient temperature unless o °C therwise specified.

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation on 10/1000 us waveform	P_{PPM}	1500	W
Peak Forward Surge Current,8.3ms Single Half Sine-Wave Superimposed on Rated Load, (JEDEC Method)	I_{FSM} (UNI)	200	A
Peak Pulse Current on 10/1000 us waveform	I_{PPM}	see Next Table	A
Power dissipation on Infinite heat sink at TA=50 °C	P_D	6.5	W
Maximum instantaneous forward voltage at 100 A for unidirectional only	V_F	3.5	V
Typical Thermal Resistance Junction to Ambient(Note 1)	R_{θJA}	75	°C/W
	R_{θJL}	15	°C/W
Operating Junction Temperature and Storage Temperature Range	T_J,T_{STG}	-65 to +150	°C

NOTES:

1. Mounted on 8 mm² (0.13mm thick) land areas.

Characteristics at Ta = 25°C

Type		Marking		V _{RMW}	Breakdown Voltage		Test Current	Max. Reverse Leakage	Max.Clamp Voltage	Max. Peak Pulse Current
					V _{BR} @ I _T		I _T	IR@VR	V _c @ I _{PP}	I _{PP}
					Min	Max				
UNI	BI	UNI	BI	V	V	V	mA	uA	V	A
SMCJ5.0A	SMCJ5.0CA	GDE	BDE	5	6.4	7	10	800	9.2	163
SMCJ6.0A	SMCJ6.0CA	GDG	BDG	6	6.67	7.37	10	800	10.3	145.7
SMCJ6.5A	SMCJ6.5CA	GDK	BDK	6.5	7.22	7.98	10	500	11.2	134
SMCJ7.0A	SMCJ7.0CA	GDM	BDM	7	7.78	8.6	10	200	12	125
SMCJ7.5A	SMCJ7.5CA	GDP	BDP	7.5	8.33	9.21	1	100	12.9	116.3
SMCJ8.0A	SMCJ8.0CA	GDR	BDR	8	8.89	9.83	1	50	13.6	110.3
SMCJ8.5A	SMCJ8.5CA	GDT	BDT	8.5	9.44	10.4	1	20	14.4	104.2
SMCJ9.0A	SMCJ9.0CA	GDV	BDV	9	10	11.1	1	10	15.4	97.4
SMCJ10A	SMCJ10CA	GDX	BDX	10	11.1	12.3	1	5	17	88.3
SMCJ11A	SMCJ11CA	GDZ	BDZ	11	12.2	13.5	1	1	18.2	82.5
SMCJ12A	SMCJ12CA	GEE	BEE	12	13.3	14.7	1	1	19.9	75.4
SMCJ13A	SMCJ13CA	GEG	BEG	13	14.4	15.9	1	1	21.5	69.8
SMCJ14A	SMCJ14CA	GEK	BEK	14	15.6	17.2	1	1	23.2	64.7
SMCJ15A	SMCJ15CA	GEM	BEM	15	16.7	18.5	1	1	24.4	61.5
SMCJ16A	SMCJ16CA	GEP	BEP	16	17.8	19.7	1	1	26	57.7
SMCJ17A	SMCJ17CA	GER	BER	17	18.9	20.9	1	1	27.6	54.4
SMCJ18A	SMCJ18CA	GET	BET	18	20	22.1	1	1	29.2	51.4
SMCJ20A	SMCJ20CA	GEV	BEV	20	22.2	24.5	1	1	32.4	46.3
SMCJ22A	SMCJ22CA	GEX	BEX	22	24.4	26.9	1	1	35.5	42.3
SMCJ24A	SMCJ24CA	GEZ	BEZ	24	26.7	29.5	1	1	38.9	38.6
SMCJ26A	SMCJ26CA	GFE	BFE	26	28.9	31.9	1	1	42.1	35.7
SMCJ28A	SMCJ28CA	GFG	BFG	28	31.1	34.4	1	1	45.4	33.1
SMCJ30A	SMCJ30CA	GFK	BFK	30	33.3	36.8	1	1	48.4	31
SMCJ33A	SMCJ33CA	GFM	BFM	33	36.7	40.6	1	1	53.3	28.2
SMCJ36A	SMCJ36CA	GFP	BFP	36	40	44.2	1	1	58.1	25.9
SMCJ40A	SMCJ40CA	GFR	BFR	40	44.4	49.1	1	1	64.5	23.3
SMCJ43A	SMCJ43CA	GFT	BFT	43	47.8	52.8	1	1	69.4	21.7
SMCJ45A	SMCJ45CA	GFV	BFV	45	50	55.3	1	1	72.7	20.6
SMCJ48A	SMCJ48CA	GFX	BFX	48	53.3	58.9	1	1	77.4	19.4
SMCJ51A	SMCJ51CA	GFZ	BFZ	51	56.7	62.7	1	1	82.4	18.2
SMCJ54A	SMCJ54CA	GGE	BGE	54	60	66.3	1	1	87.1	17.3
SMCJ58A	SMCJ58CA	GGG	BGG	58	64.4	71.2	1	1	93.6	16.1
SMCJ60A	SMCJ60CA	GGK	BGK	60	66.7	73.7	1	1	96.8	15.5
SMCJ64A	SMCJ64CA	GGM	BGM	64	71.1	78.6	1	1	103	14.6
SMCJ70A	SMCJ70CA	GGP	BGP	70	77.8	86	1	1	113	13.3
SMCJ75A	SMCJ75CA	GGR	BGR	75	83.3	92.1	1	1	121	12.4
SMCJ78A	SMCJ78CA	GGT	BGT	78	86.7	95.8	1	1	126	11.9
SMCJ85A	SMCJ85CA	GGV	BGV	85	94.4	104	1	1	137	11
SMCJ90A	SMCJ90CA	GGX	BGX	90	100	111	1	1	146	10.3
SMCJ100A	SMCJ100CA	GGZ	BGZ	100	111	123	1	1	162	9.3
SMCJ110A	SMCJ110CA	GHE	BHE	110	122	135	1	1	177	8.5
SMCJ120A	SMCJ120CA	GHG	BHG	120	133	147	1	1	193	7.8
SMCJ130A	SMCJ130CA	GHK	BHK	130	144	159	1	1	209	7.2
SMCJ150A	SMCJ150CA	GHM	BHM	150	167	185	1	1	243	6.2
SMCJ160A	SMCJ160CA	GHP	BHP	160	178	197	1	1	259	5.8
SMCJ170A	SMCJ170CA	GHR	BHR	170	189	209	1	1	275	5.5
SMCJ180A	SMCJ180CA	GHT	BHT	180	201	222	1	1	292	5.1

Characteristics at Ta = 25°C

Type		Marking		V _{RMW}	Breakdown Voltage		Test Current	Max. Reverse Leakage	Max. Clamp Voltage	Max. Peak Pulse Current
					V _{BR} @ I _T		I _T	IR@VR	V _c @ I _{PP}	I _{PP}
					Min	Max				
UNI	BI	UNI	BI	V	V	V	mA	uA	V	A
SMCJ200A	SMCJ200CA	GHV	BHV	200	224	247	1	1	324	4.6
SMCJ220A	SMCJ220CA	GHX	BHX	220	246	272	1	1	356	4.2
SMCJ250A	SMCJ250CA	GHZ	BHZ	250	279	309	1	1	405	3.7
SMCJ300A	SMCJ300CA	GJE	BJE	300	335	371	1	1	486	3.1
SMCJ350A	SMCJ350CA	GJG	BJG	350	391	432	1	1	567	2.6
SMCJ400A	SMCJ400CA	GJK	BJK	400	447	494	1	1	648	2.3
SMCJ440A	SMCJ440CA	GJM	BJM	440	492	543	1	1	713	2.1

Fig.1 Peak Pulse Power Rating Curve

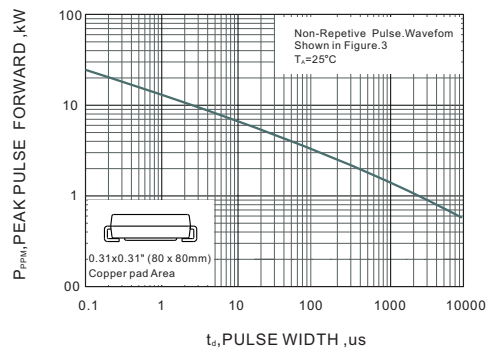


Fig.2 Pulse Waveform

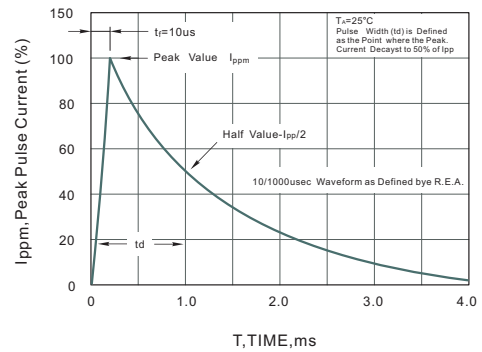


Fig.3 Forward Current Derating Curve

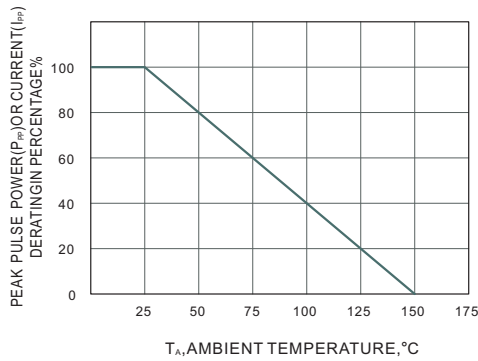


Fig.4 Typical Junction Capacitance



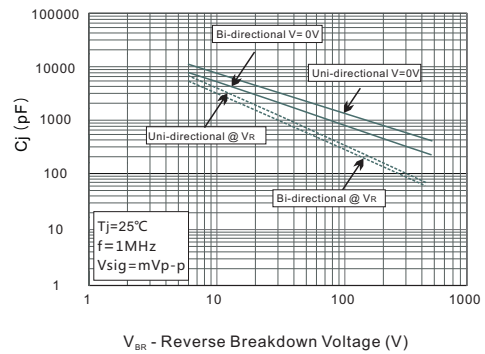


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

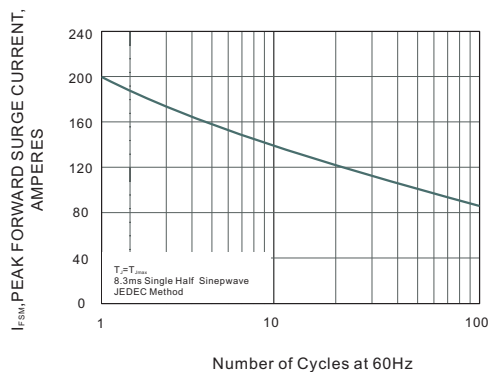

Marking Diagram

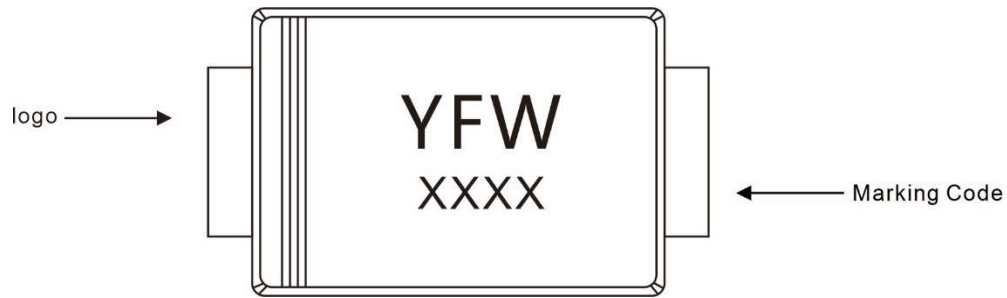

Ordering information


Package	Packing Description	Packing Quantity
DO-214AB SMC	Tape/Reel, 13" reel	3000PCS/Reel 30000PCS/Carton

Package Dimensions

DO-214AB SMC

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	2.00	2.62	79	103
E	6.5	7.0	256	276
D	5.6	6.2	220	244
E ₁	7.6	8.0	299	315
A ₁	0.05	0.21	2.0	8.3
C	0.15	0.31	5.9	12
L	0.9	1.6	35	63
b	2.75	3.25	108	128

The recommended mounting pad size

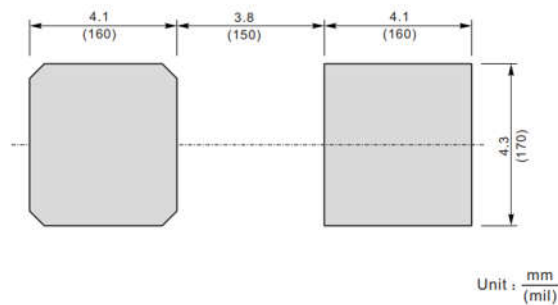

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.