






旭程电子(深圳)有限公司
XC Electronics (ShenZhen) Corp. , Ltd.

选型参数表

Table of selection parameters

厂家型号	安规认证
5CH 500mA400V/500V/600V	
5CH 800mA400V/500V/600V	
5CH 1A400V/500V/600V	
5CH 1.6A400V/500V/600V	
5CH 2A400V/500V/600V	
5CH 3.15A400V/500V/600V	
5CH 4A400V/500V/600V	
5CH 5A400V/500V/600V	
5CH 6.3A400V/500V/600V	
5CH 8A400V/500V/600V	
5CH 10A400V/500V/600V	
5CH 12A400V/500V/600V	
5CH 12.5A400V/500V/600V	
5CH 15A400V/500V/600V	
5CH 16A400V/500V/600V	
5CH 20A400V/500V/600V	



产品规格书 Fuses Specification

1. 适用范围 (Available range) :

用于半导体设备保护。

For semiconductor equipment

2. 型号定义解释 (Model meaning):

5CH: 慢断系列产品 (5CH: Slow Blow Fuses)

3. 相关标准 (Safety Standards) :

IEC60127 GB9364


通过认证 (Approved file No):



4. 尺寸与结构 (Size and Structure) :

4.1 外形、结构及尺寸 (The out view, construction and dimensions):



参考下图 Refer to the following figure.

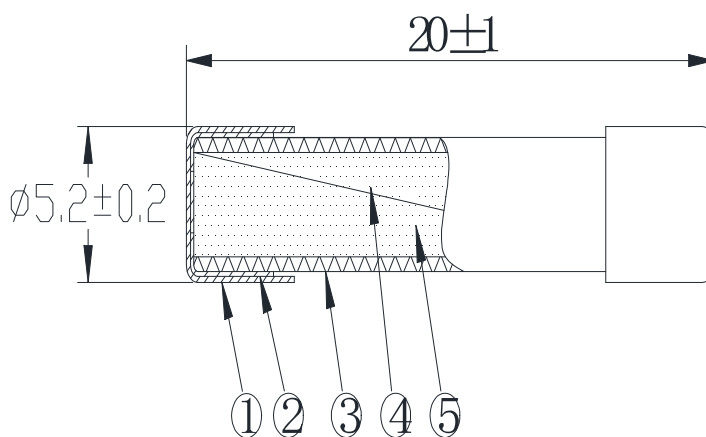



编号 No.	部件 Part Name	材料 Material	备注 Remarks
①	外帽 Outside Cap	黄铜镀银 Silver Plated Brass	
②	内帽 Inner Cap	黄铜镀镍 Nickel Plated Brass	
③	管体 Tube	陶瓷 Ceramic	
④	可熔体 Fusible Element	金属丝或金属片 Metal Wire or Metal Sheet	RoHS
⑤	消弧剂 Arc extinguishing agent	石英砂 Quartz Sand	

4.2 举例:型号及标示 (Model and indication)

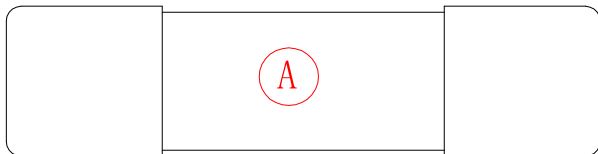

型号 Model	A 表示 Indication A		备注 Remarks
	额定电压/电流 Rated Voltage/Current	商标. 品名. 认证 Trademark. Type. Approved mark	认证号 Approval No.
5CH Series	5CH 2A 400V 500V 600V		UR:E249609 TUV: T 506200180001



4.3 陶瓷管 (Ceramic Tube)

管体本体无破裂、缺损等现象。

The tube shall have no defects such as crack, injury and contamination.

4.4 铜帽 (Brass caps)

铜帽应焊接牢固，以保证在未损坏熔断体时，铜帽不能被卸脱。铜帽表面镀层应结实，端帽两端均可承受大小至少为 5N、保持 1min 的轴向拉力。

The cap should be firmly attached so that it is not possible to remove them without damaging the fuse itself. The plated material should be firm. Each of the cap should be bear an axial pull of 5N for 1min.

4.5 焊点 (Soldering joint)

焊接铜帽端时，残留的助焊剂及焊锡等异物不应超出铜帽口和沾附在保险管外表面。

Soldering joint in end cap shall not melt during normal operation and shall not have solder clips on the tube, element in view and outer surface of caps.

5. 机械特性 (Mechanical characteristics)

保险丝应能承受下列试验：

Fuses should endure both of the following tests:

5.1 扭力试验：固定保险丝的一端铜帽，然后在另一端铜帽上顺时针和逆时针方向上顺序施加 100g. cm 力矩，两端铜帽不应松动，管体也不应破碎。

Wresting test: Fixed one cap of the fuse, applied 100g.cm of torsion power in clockwise and counter-clockwise on the other cap, as a result, the tube shall be no damage and the cap should be no loosening.

5.2 拉力试验：固定保险丝的一端铜帽，然后在另一端铜帽上，沿水平轴方向施加 5N 的拉力 1min，两端铜帽不应松动且管体不应破碎。

Pulling test: Fixed one cap of the fuse, applied level pull force of 5N to the other cap for 1 minute, there shall be no damage with the tube and no loosening with



the caps and the pigtails.

5.3 管子强度试验：两端铜帽固定好后，在管体的中心位置施加 10N 的压力，管体不应破碎。

Stress test: Fixed two caps of the fuse, applied the stress of 10N to the tube center, there shall be no damage with the tube.

6. 电气特性 (Electrical performance)

6.1 测试条件 (Testing Ambient)

测试条件都应在下列大气条件下进行：

All tests should be carried out under the following conditions:

- 温度 (Surrounding temperature): $15^{\circ}\text{C} \sim 35^{\circ}\text{C}$;
- 相对湿度 (Relative humidity): $45\% \sim 75\%$;
- 大气压力 (Atmosphere pressure): $8.6 \times 10^4 \text{ Pa} \sim 1.06 \times 10^5$

6.2 时间/电流特性 (Time-current Characteristic)

电流 (In ratio) 型号类别 (Item No.)	150%	210%	275%
5CH 系列 Series	>1h	<30min	$\geq 250\text{ms}$ $\leq 80\text{s}$

6.3 分断能力 (Breaking capacity)

1) 每一次测试，保险管能安全动作，不能出现以下现象：

In each of the tests, the fuse-link shall operate satisfactorily without any of the following phenomena:

- 持续电弧;
- permanent arcing;
- 引燃;
- ignition;
- 保险管爆炸;



-Bursting of the fuse-link.

注意：颜色改变不认为是不合格.

NOTE: changes in color are not considered as a failure.

型号 Model	额定电流 Rated Current	安全认证分断电流 Safe attestation Breaking current
		
5CH 系列 5CH Series	100mA-10A	400V 2000A AC/DC
	100mA-20A	500V 500A AC/DC
	100mA-20A	600V 300A AC/DC

6.4 耐久性试验 (Endurance test)

1) 对保险丝通过 1.2 倍额定电流 1 小时，然后切断 15 分钟，重复此循环 100 次。

A current 1.2 In is passed through the fuse-link for a period of 1h.The current is then switched off for a period of 15 min.The cycle is repeated 100 times.

2) 然后对熔断体通以 1.5 倍额定电流 1 小时。

A current 1.5In is then passed through the fuse-link for 1h.

3) 测量熔断体两端的电压降，试验后，熔断体两端的电压降的增大量不大于试验前测得值的 10%。


Finally,the voltage drop across the fuse-link is measured.The voltage drop across the fuse-link after the test shall not have increased by more than 10% of the value measured before the test.

4) 试验后，标记仍应清晰可辨，而且诸如端帽上的焊点不应出现任何明显的劣变。

After the test,the marking shall still be legible and soldered joints on end caps,for example,shall not show and appreciable deterioration.




6.5 时间电流特性曲线图 (Time-current curves)

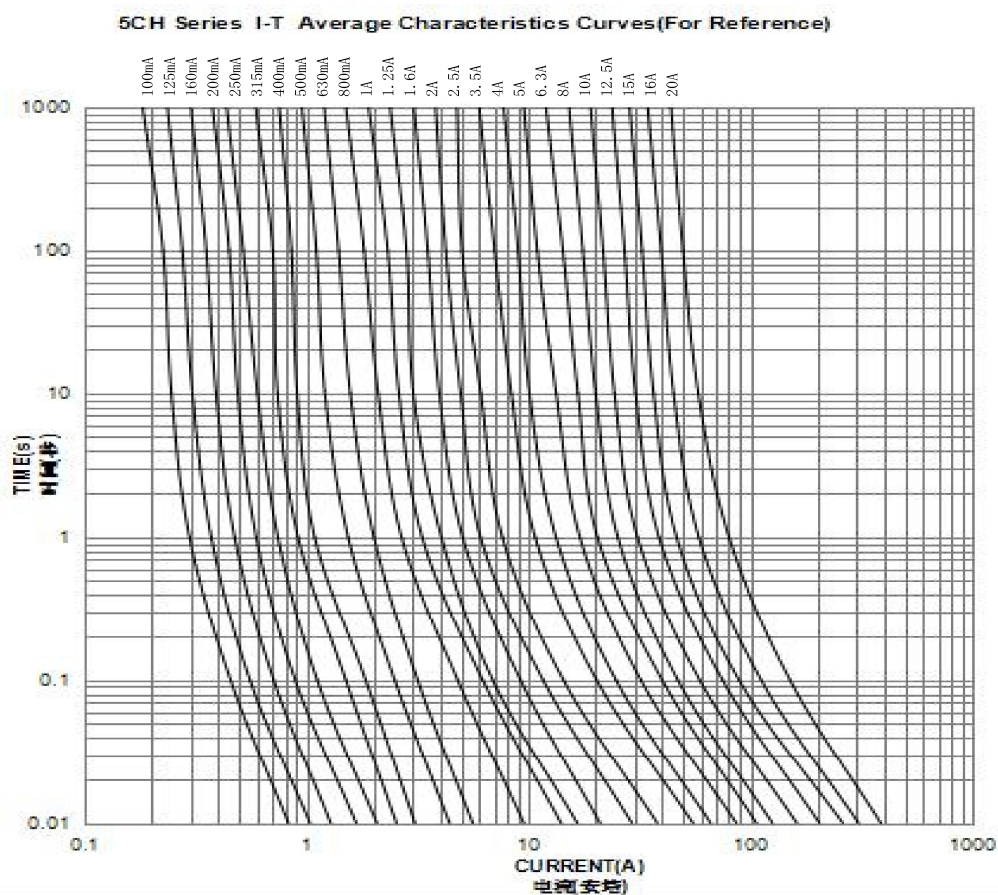

7. 环境特性 Environmental characteristic

7.1 温度-电流负荷比曲线 Temperature-Current Curve

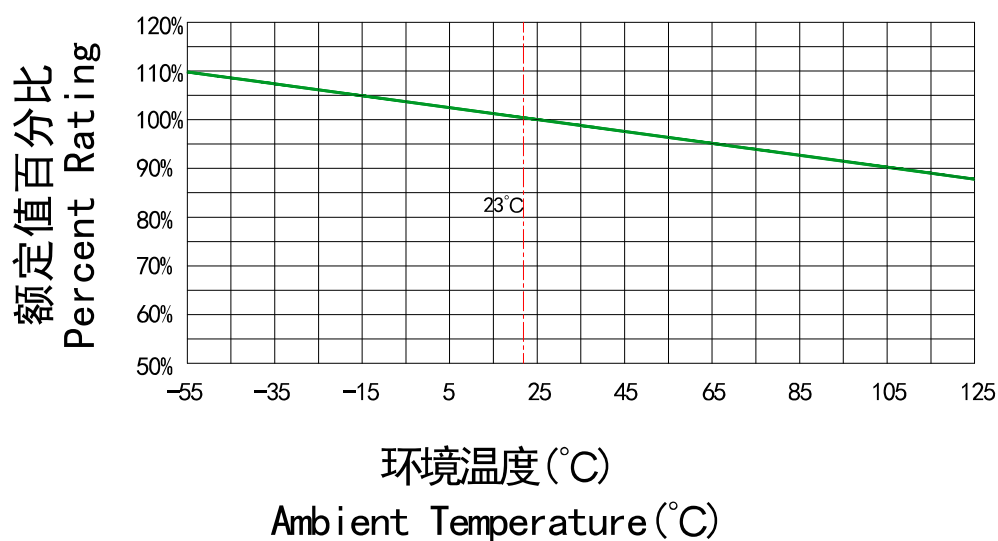



7.2 工作温度/Operating temperature : $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$

7.3 贮存条件 Storage conditions

贮存温度/Storage temperature: $5^{\circ}\text{C} \sim 35^{\circ}\text{C}$

贮存湿度/Storage humidity: $25\% \sim 85\%$

贮存周期/Storage time: 6 months

8. 信赖性试验 (Reliability test)

项目/Item	试验要求/Test Requirement	试验条件/Test Condition
高低温试验 High & low Temperature Test	试验后保险丝管的电阻符合范围 After test, the resistance value of the fuses shall be in range	测试高温: 85°C , 测试时间: 48h Test high temperature: 85°C , Test time: 48h 测试低温: -20°C , 测试时间: 48h Test low temperature: -20°C , Test time: 48h
高湿试验 High Humidity Test	试验后保险丝管的电阻符合范围 After test, the resistance value of the fuses shall be in range	测试温度: 85°C , 测试湿度: 95%, 测试时间: 96h Test temperature: 85°C , Test humidity: 95%, Test time: 96h
落下、冲击实验 Falling Shock Test	铜帽应固定牢固, 以保证在未损坏熔断体时, 铜帽不能被卸下, 铜帽表面镀层应牢固不易脱落, 每个端帽应能经受专用的设备外加轴向拉力 5N, 保持 1 分钟, 陶瓷管必须无缺陷破裂和缺损。试验后保险丝管的电阻符合范围。 Cap should be firmly attached so that it is not possible to remove them without damaging the fuse itself. The means of attachment shall be sufficient to withstand an axial pull of 5N applied to each cap for 1 minute. The cap shall be nickel plated firmly. The glass tube shall have no defects such as crack and injury. After falling shock test, the resistance value of the fuses shall be in range.	保险管从 152cm 高自由落下, 跌落 5 次。 Falling Height: 152cm Falling Times: 5
振动试验 Vibration	试验后保险丝管的电阻符合范围 After test, the resistance value of the fuses shall be in range	振幅 1.5mm, 频率 $10 \sim 55 \sim 10\text{Hz}$, 时间 2 小时 Amplitude: 1.5mm, Frequency: $10 \sim 55 \sim 10\text{Hz}$, Test time: 2h



9. 产品标志 (Marking)

9.1 保险丝上的标志应易于看清。

The marking on fuse shall be indelibly marked on the end cap and easily visible.


9.2 每个保险丝标记应包含下列内容：

The symbol for every fuse shall be as prescribed below:

- 1) 额定电流 (Rated current): 500mA—20A
- 2) 额定电压 (Rated voltage): 400V 500V 600V
- 3) 型号 (Model): 5CH
- 4) 安全认证标志 (Safety mark logo):  
- 5) 厂标 (Trade mark): 

10. 包装 (500PCS/包、1500PCS/盒、12000PCS/箱) 仅供参考, 以实际数量为准.

Packaging (500PCS/Bag、1500PCS/Box、12000PCS / External Carton)

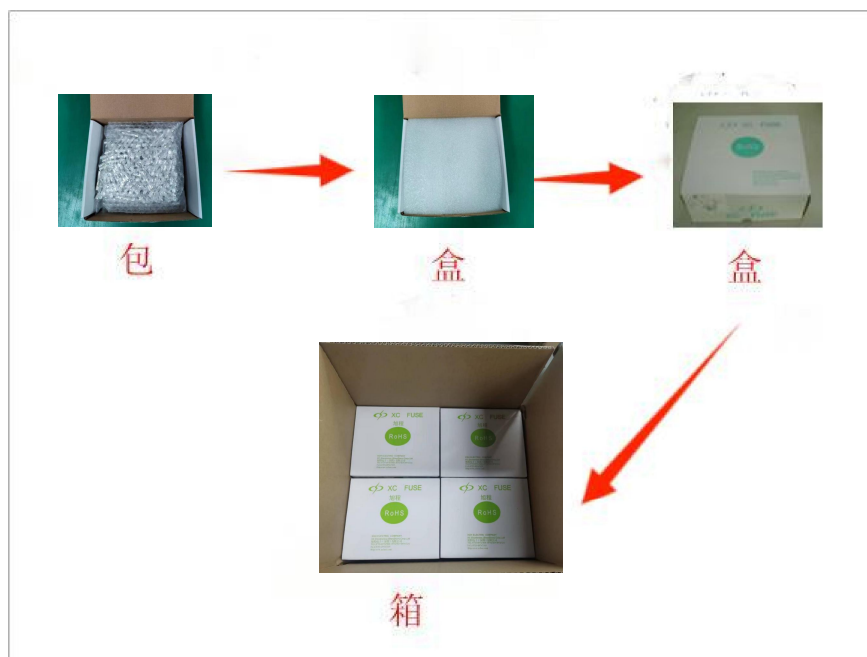

11. 举例:料号解释/Part No. description

034. 1200 A 0007

↓ ↓ ↓ ↓

5CH Series 2A 600V Information Code



UL iQ for Fuses



Fuses

E249609

Guide Information

XC ELECTRONICS (SHENZHEN) CORP LTD

BLDG 11, HEAO HENGGANG, JINYUAN INDUSTRY ZONE, SHENZHEN GUANGDONG 518115 CN

5CH

Supplemental fuses: filled-tube, cartridge enclosed

<u>Size</u> <u>mm(in)</u>	<u>Amps</u> <u>(A)</u>	<u>Volts</u> <u>(V)</u>	<u>Interrupting</u> <u>Rating (A)</u>
5.2 x 20 (0.20 x 0.79)	0.1 - 10	400Vac	2000
	0.1 - 20	500Vac	500
	0.1 - 20	600Vac	300
	0.1 - 10	400Vdc	2000
	0.1 - 20	500Vdc	500
	0.1 - 20	600Vdc	300

Report Date: 2018-06-25
Last Revised: 2018-06-25

© 2021 UL LLC



Date: 2024-02-27

XC Electronics (Shenzhen)
Corp. Ltd.
Building 11
Jinyuan Industrial Zone
He'ao Henggang Town
Shenzhen
518115 Guangdong
P.R. China

Ref: T License

Type of Equipment : Miniature Fuse-links
Certificate No. : T 50620018 0001
Report No. : CN23SVFY 001
Engineer/Contact : Robin Luo
Standards : UL 248-1:2022
UL 248-14:2000 R5.20

Dear Madame or Sir,

The above referenced technical equipment has been tested and was found to be in compliance with the listed test requirement(s). Enclosed, please find the TUV Rheinland approval document No. T 50620018 0001.

It authorizes you to label the listed product(s) with the TUV Rheinland Mark identified in the approval document. For compliance, the Test Mark must be on the approved unit.

Your product is subject to regular factory follow-up inspections as well as annual certificate and factory registration fees.

In using the TUV Rheinland Mark you are obligated to comply with the TUV Rheinland of North America Service Agreement.

If we can be of any further assistance to you, please do not hesitate to contact us.

With kind regards,

Certification Body



Audrey Wang

Enclosure

Certificate

Certificate no.

T 50620018 0001

License Holder:

XC Electronics (Shenzhen)
Corp. Ltd.
Building 11
Jinyuan Industrial Zone
He'ao Henggang Town
Shenzhen
518115 Guangdong
P.R. China

Manufacturing Plant:

XC Electronics (Shenzhen)
Corp. Ltd.
Building 11
Jinyuan Industrial Zone
He'ao Henggang Town
Shenzhen
518115 Guangdong
P.R. China

Report Number: CN23SVFY 001**Client Reference:****Certification acc. to:** UL 248-1:2022
UL 248-14:2000 R5.20**Product Information****Certified Product:** Miniature Fuse-links**Model Designation:** 5CH

Trademark : XC (logo)

Technical Data:

Rated Voltage : 1) AC 600V, 2) DC 600V

Rated Current (In) : 100mA, 125mA, 160mA, 200mA, 250mA,
315mA, 400mA, 500mA, 630mA, 800mA,
1A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 3.5A,
4A, 5A, 6.3A, 7A, 8A, 10A, 12A, 12.5A,
15A, 16A, 20ARated Breaking Capacity : 1) 200A at AC 600V
2) 150A at DC 600V

Maximum opening times : 2.0In - 2min

Dimension or Size : 5.2mmx20mm, without wire terminations

Remarks: 1.35In opening time not specified. This certificate is not valid for EU.**Appendix:** 1UL 248-1
UL 248-14www.tuv.com
ID 0007000000**Date of issue:**2024-02-27
(yr/mo/day)

TUV Rheinland of North America, Inc.
400 Beaver Brook Rd, Boxborough, MA 01719
Tel +1 (978) 266 9500, Fax +1 (978) 266-9992

www.tuv.com

The logo for TÜV Rheinland, featuring a blue triangle with a white 'A' inside, followed by the text 'TÜVRheinland' and a registered trademark symbol.