SAMZO REAC/ROHS

REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2019.06.12

Technical Requirements

1.Frequency: 0 ~ 3 GHz
2. Impedance: 50 Ω
3. VSWR: ≤1.35
4. Operating Voltage: 500 V
5. Withstand Voltage: 1500 V
6. Insulation Resistance: ≥5000 MΩ
7. Contact Resistance: Inner Conductor ≤1.5 mΩ
   Outer Conductor ≤1 mΩ
8. Insertion Loss: ≤0.3 dB
9. Unspecified Tolerances: ±0.2

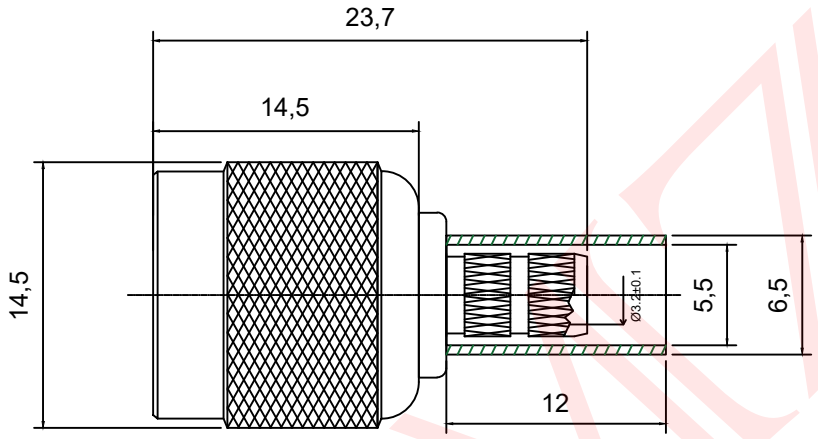

TNC-J-237-L0-N

- Surface treatment镀层:亮镍
- Operating Mode:垂直
- Length体长:23.7mm
- Product number编号:J-3切槽
- Product series系列:TNC同轴射频天线座

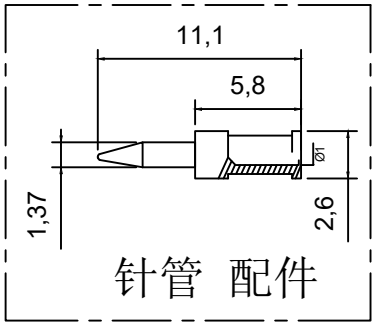

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR					
C	插孔	HPB59-1	1	------				GENERAL TOLERANCE	
B	绝缘体	聚四氟乙烯	1	------				≥0~2<	±0.15
A	主体	黄铜	1	镀镍	DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0.25
					CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15
					APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35

FIRST VIEW

SCALE 1:1 UNIT mm

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

SAMZO COMPONENTS
Electronic switch and connector manufacturer

TITLE:: TNC-J-3- 23.7MM 垂直 切槽
DWG NO: TNCJ30-P001
PART NO: TNCJ30-191400
MODEL NO: TNC-J-237-L0-N
NAME: TNC COAXIAL RF CONNECTOR