

Product Specification

XBLW LM317DCYR

1.5A Adjustable Voltage Regulator


WEB | www.xinboleic.com



Descriptions

The LM317 is an adjustable 3-terminal positive voltage regulator capable of supplying in excess of 1.5 A over an output voltage range of 1.2 V to 37 V. This voltage regulator is exceptionally easy to use and requires only two external resistors to set the output voltage. Further, it employs internal current limiting, thermal shutdown and safe area compensation, making it essentially blow-out proof.

The LM317 serves a wide variety of applications including local, on card regulation. This device can also be used to make a programmable output regulator, or by connecting a fixed resistor between the adjustment and output, the LM317 can be used as a precision current regulator.

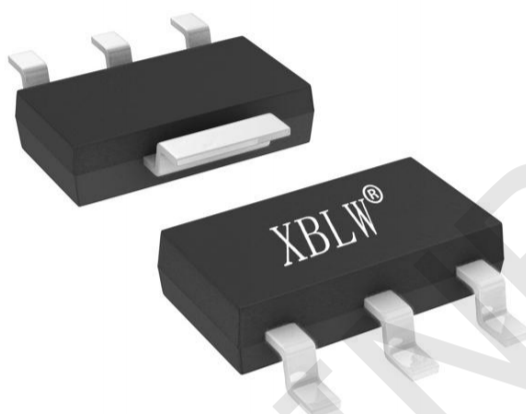

SOT-223

Feature

- Typical 1% Output Voltage Tolerance
- Output voltage adjustable from 1.25V ~37V
- Output current in excess of 1.5A
- Internal short circuit protection
- Internal over temperature protection
- Output transistor safe area compensation
- Internal short circuit protection


Applications

- PC Motherboard
- LCD Monitor
- Graphic Card
- DVD Player
- Network Interface Card/Switch
- Telecom Equipment
- Printer and other Peripheral Equipment

Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
XBLW LM317DCYR	SOT-223	LM317S	Tape	2500Pcs/Reel

Pin Configuration (Top View)

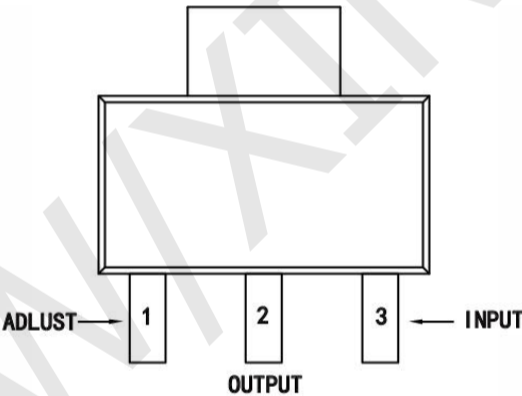


SOT-223


Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
ADJUST	1	I	Output voltage adjustment pin. Connect to a resistor divider to set V_o
INPUT	3	I	Supply input pin
OUTPUT	2	O	Voltage output pin

BLOCK DIAGRAM

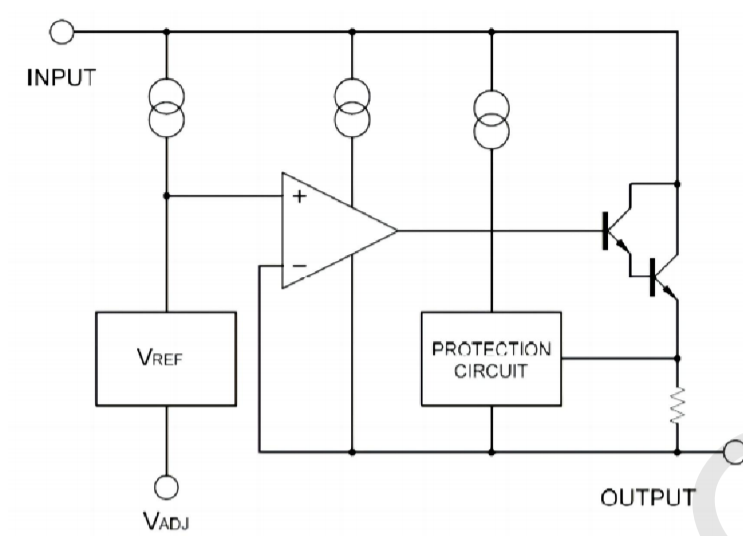

APPLICATION CIRCUIT

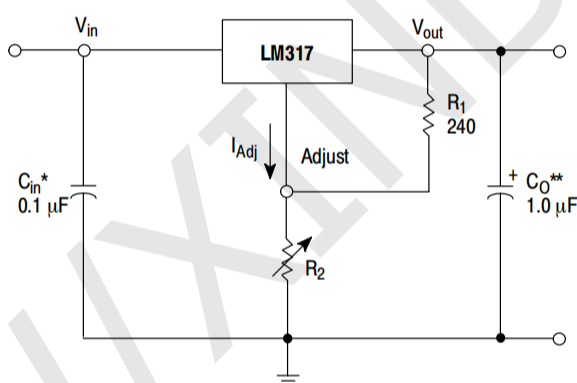

* C_{in} is required if regulator is located an appreciable distance from power supply filter.

** C_0 is not needed for stability, however, it does improve transient response.

$$V_{out} = 1.25 V \left(1 + \frac{R_2}{R_1} \right) + I_{Adj} R_2$$

Since I_{Adj} is controlled to less than 100 μA , the error associated with this term is negligible in most applications.

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ C$) *

Characteristic	Symbol	Min.	Max.	Unit
Input - Output Voltage Difference	$V_{in}-V_{out}$		37	V
Power Dissipation	P_d	Internal limited		
Maximum junction temperature	T_J		150	$^\circ C$
Storage temperature	T_S	-40	150	$^\circ C$
Lead temperature (soldering, 10sec)	T_{LEAD}		260	$^\circ C$
ESD (human body model)	ESD		4000	V

*: Absolute maximum ratings are stress ratings only and functional device operation is not implied. The device could be damaged beyond Absolute maximum ratings.

Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
Operating Temperature Range	LM317	-20	125	°C


ELECTRICAL CHARACTERISTICS

($V_{IN}-V_{OUT}=5V$, $I_{OUT}=10mA$, $T_a=25^{\circ}C$, unless otherwise specified.) *


Characteristics	Test conditions	Symbol	Min.	Typ.	Max.	Unit
Reference voltage	$10mA \leq I_{OUT} \leq 1.5A$, $3V \leq (V_{IN} - V_{OUT}) \leq 37V$, $P_D \leq 2.0W$	V_{REF}	1.2	1.25	1.3	V
Line regulation	$3V \leq V_{IN} - V_{OUT} \leq 37V$	S_V		0.01	0.04	%/V
Load regulation	$0mA \leq I_{OUT} \leq 1.5A$	S_I		0.2	0.4	%
Adjust pin current		I_{Adj}		50	100	μA
Adjust pin current change	$3V \leq V_{IN} - V_{OUT} \leq 37V$, $10mA \leq I_{OUT} \leq 1.5A$, $P_D \leq 2.0W$	I_{Adj}		0.2	5.0	μA
Minimum load current	$V_{IN}-V_{OUT}=37V$	I_{Lmin}		3.5	10	mA
Ripple rejection	$f=120Hz$, $C_{OUT}=1\mu F$ tantalum, $(V_{IN}-V_{OUT})=3V$, $I_{OUT}=1.5A$	RR	60	75		dB
Temperature stability	$T_{MIN} \leq T_J \leq T_{MAX}$			0.7		%
RMS output noise (% of V_{OUT})	$T_a=25^{\circ}C$, $10Hz \leq f \leq 10kHz$	en		0.003		%
Thermal resistance, Junction to case	SOT223	θ_{JC}		23		$^{\circ}C/W$
Thermal resistance, Junction to Ambient	SOT223	θ_{JA}		165		$^{\circ}C/W$
Thermal shutdown hysteresis		Thys		25		$^{\circ}C/W$

*: Maximum Power Dissipation is Package Type and Case Temperature dependent.


CHARACTERISTICS CURVES

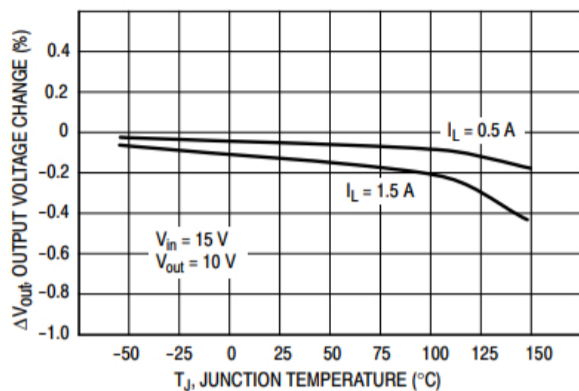


Load Regulation

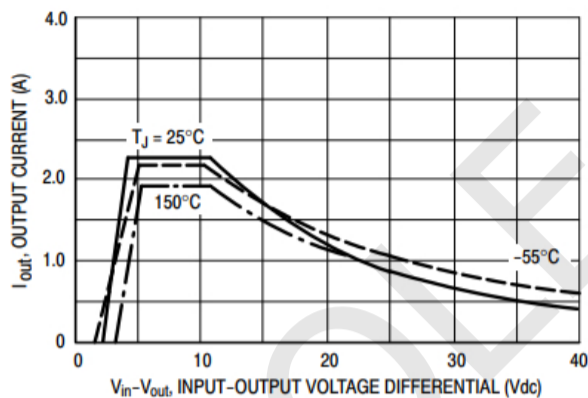


Current Limit

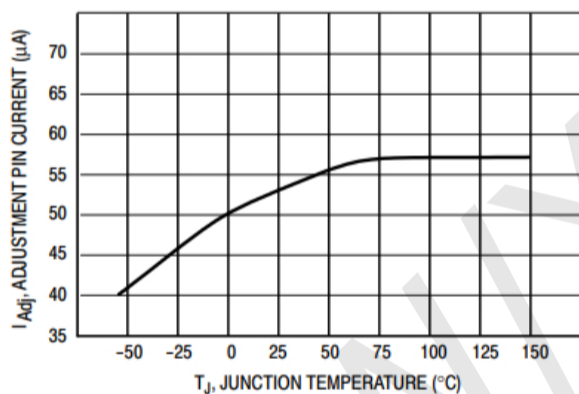


Adjustment Pin Current

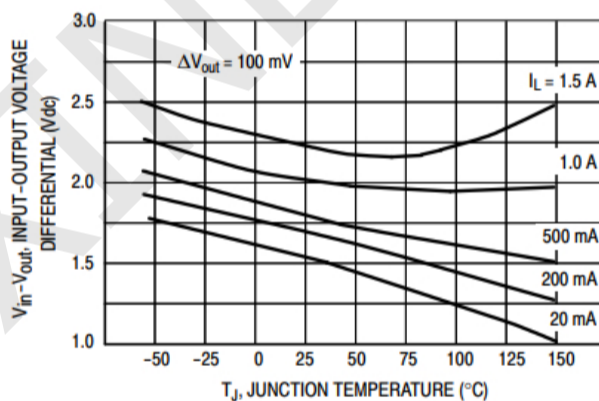

Dropout Voltage

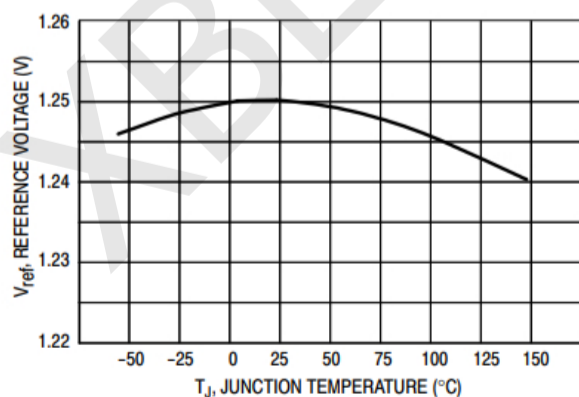


Temperature Stability

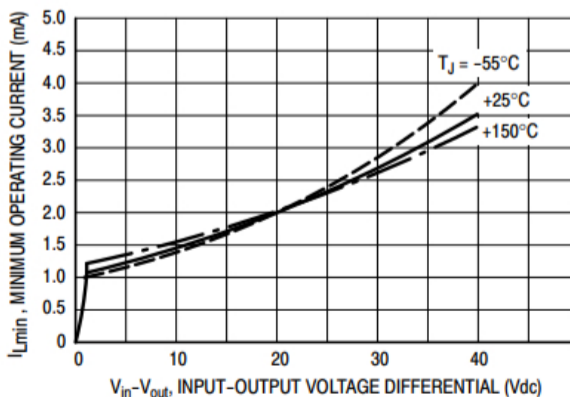


Minimum Operating Current


CHARACTERISTICS CURVES

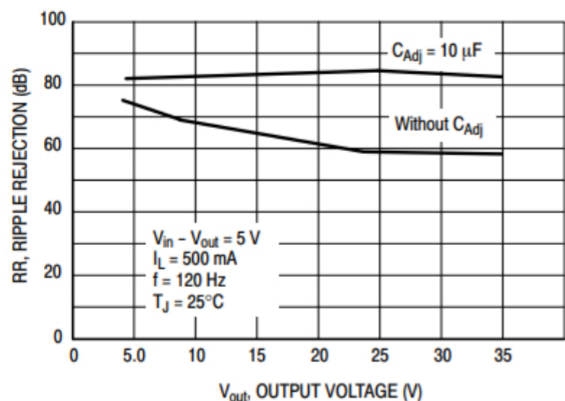


Ripple Rejection versus Output Voltage

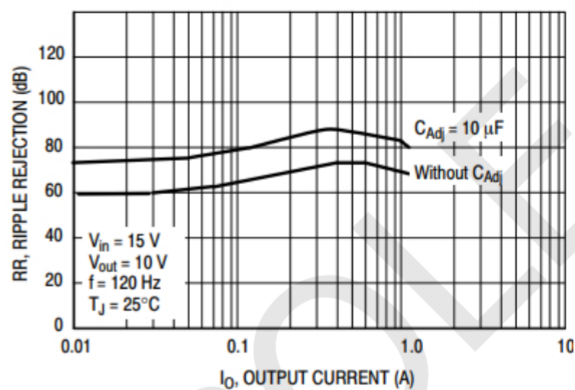


Ripple Rejection versus Output Current

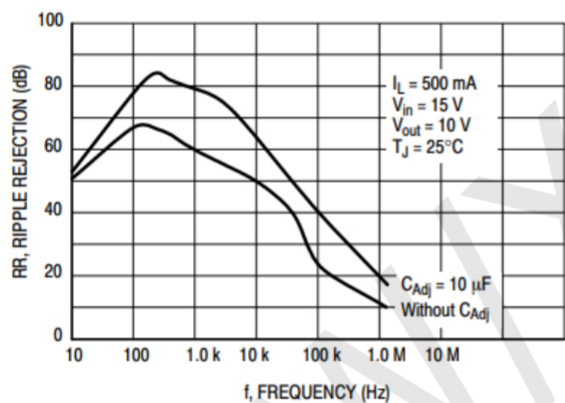


Ripple Rejection versus Frequency

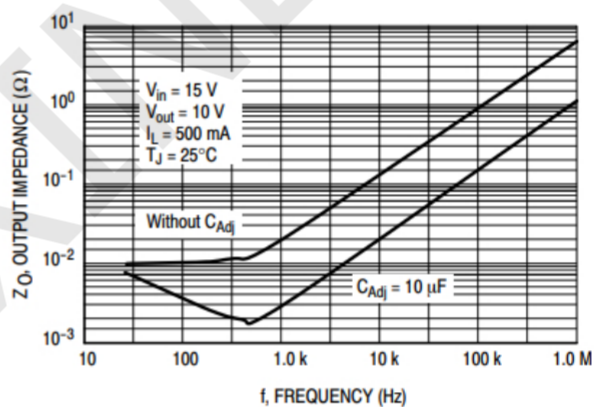

Output Impedance

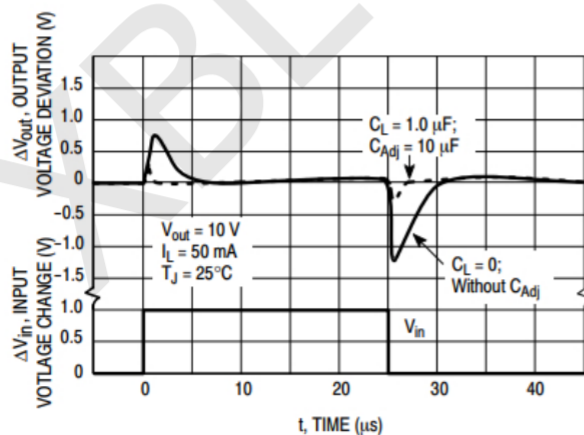

Line Transient Response


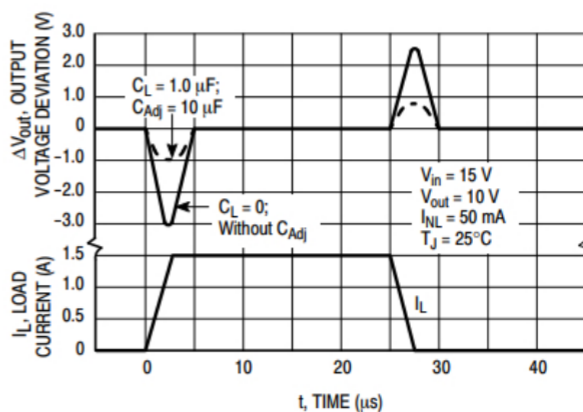


Load Transient Response

Package Information

· SOT-223

Size Symbol	Dimensions In Millimeters		Size Symbol	Dimensions In Inches	
	Min (mm)	Max (mm)		Min (in)	Max (in)
A		1.800	A		0.071
A1	0.020	0.100	A1	0.001	0.004
A2	1.500	1.700	A2	0.059	0.067
b	0.660	0.840	b	0.026	0.033
b1	2.900	3.100	b1	0.114	0.122
c	0.230	0.350	c	0.009	0.014
D	6.300	6.700	D	0.248	0.264
E	6.700	7.300	E	0.264	0.287
E1	3.300	3.700	E1	0.130	0.146
e	2.300 (BSC)		e	0.091 (BSC)	
L	0.750		L	0.030	
θ	0°	10°	θ	0°	10°

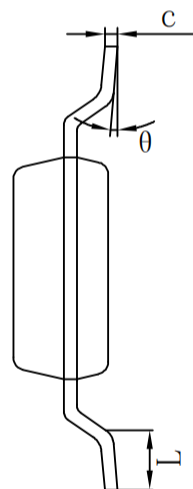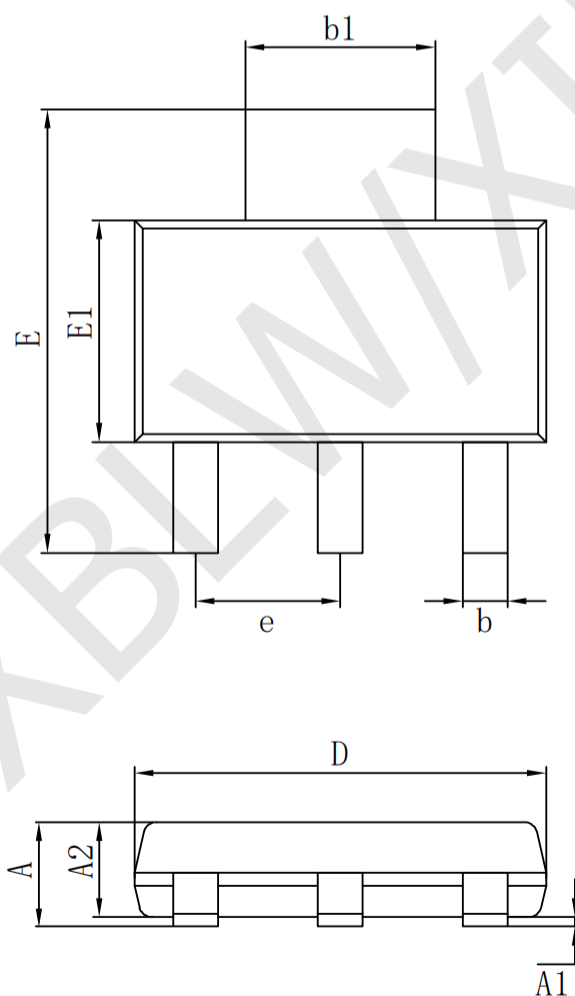

Statement:

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW products have not been licensed for life support, military, and aerospace applications, and therefore XBLW is not responsible for any consequences arising from the use of this product in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.