

Features

- Wide supply voltage range from 0.9V to 3.6V
- Inputs accept voltages up to 3.6V
- I_{OFF} supports partial-power-down mode
- Low static power consumption; I_{CC}=0.5μA (Max.)
- ESD Protection Exceeds JESD 22
 - 2000-V Human-Body Model (A114-A)
 - 200-V Machine Model (A115-A)
 - 1000-V Charged-Device Model (C101)


General Description

The provides the single non-inverting buffer with open-drain output. The output of the device is an open drain and can be connected to other open-drain outputs to implement active-LOW wire-OR active-HIGH wire-AND functions.


Applications

- AV Receiver
- Audio Dock:Portable
- Blu-ray Player and Home Theater
- Embedded PC
- Personal Digital Assistant(PDA)
- Power:Telecom/Server AC/DC Supply:Single Controller:Analog and Digital
- Solid State Drive(SSD):Client and Enterprise
- Wireless Headset,Keyboard,and Mouse

Logic Diagram



Pin Configuratio (TOP VIEW)

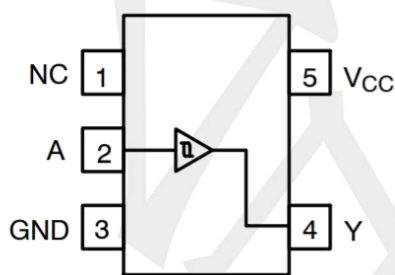

SOT353

Function Table

INPUT(A)	OUTPUT(Y)
L	L
H	H

Note:H: HIGH voltage level;L: LOW voltage level.

Absolute Maximum Ratings

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNIT
Supply Voltage	V _{CC}		-0.5 ~ +4.6	V
Input Voltage	V _{IN}		-0.5 ~ +4.6	V
Output Voltage	V _{OUT}	Output in the high or low state	-0.5 ~ +V _{CC} +0.5V	V
		Output in the power-off state	-0.5 ~ +4.6	V
VCC or GND Current	I _{CC}		±50	mA
Continuous Output Current	I _{OUT}	V _{OUT} =0~V _{CC}	±20	mA
Input Clamp Current	I _{IK}	V _{IN} <0	-50	mA
Output Clamp Current	I _{OK}	V _{OUT} <0	-50	mA
Storage Temperature Range	T _{STG}		-65 ~ +150	°C
Junction to Ambient	θ _{JA}	SOT353	280	°C/W

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

Recommended Operating Conditions

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V _{CC}	Operating	0.9	--	3.6	V
Input Voltage	V _{IN}		0	--	3.6	V
Output Voltage	V _{OUT}	High or low state	0	--	3.6	V
Input Transition Rise or Fall Rate	Δt/Δv	V _{CC} =0.9V ~ 3.6V	--	--	200	ns/V
Operating Temperature	T _A		-40	--	+125	°C

Electrical Characteristics (T_A=25°C ,unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-level Input Voltage	V _{IH}	V _{CC} =0.9V	0.7×V _{CC}	--	--	V
		V _{CC} =1.1V ~ 1.95V	0.65×V _{CC}	--	--	V
		V _{CC} =2.3V ~ 2.7V	1.6	--	--	V
		V _{CC} =3V ~ 3.6V	2	--	--	V
Low-level Input Voltage	V _{IL}	V _{CC} =0.9V	--	--	0.3×V _{CC}	V
		V _{CC} =1.1V ~ 1.95V	--	--	0.35×V _{CC}	V
		V _{CC} =2.3V ~ 2.7V	--	--	0.7	V
		V _{CC} =3V ~ 3.6V	--	--	0.9	V
Low-Level Output Voltage	V _{OL}	V _{CC} =0.9 ~ 3.6V, I _{OL} =20μA	--	--	0.1	V
		V _{CC} =1.1V, I _{OL} =1.1mA	--	--	0.3×V _{CC}	V
		V _{CC} =1.4V, I _{OL} =1.7mA	--	--	0.31	V
		V _{CC} =1.65V, I _{OL} =1.9mA	--	--	0.31	V
		V _{CC} =2.3V	I _{OL} =2.3mA	--	0.31	V
		V _{CC} =3V	I _{OL} =2.7mA	--	0.31	V
Input Leakage Current	I _{I(LEAK)}	V _{CC} =0 ~ 3.6V, V _{IN} =GND ~ 3.6V	--	--	±0.1	μA
Power OFF Leakage Current	I _{off}	V _{CC} =0 V, V _{IN} or V _{OUT} =0 ~ 3.6V	--	--	±0.2	μA
Additional Power OFF Leakage Current	ΔI _{off}	V _{CC} =0 V~0.2V, V _{IN} or V _{OUT} =0 ~ 3.6V	--	--	±0.2	μA
Quiescent Supply Current	I _{CC}	V _{CC} =0.9 ~ 3.6V, V _{IN} =V _{CC} or GND, I _{OUT} =0	--	--	0.5	μA
Additional Quiescent Supply Current Per Input Pin	ΔI _{CC}	V _{CC} =3.3 V, V _{IN} =V _{CC} -0.6V, I _{OUT} =0	--	--	40	μA
Input Capacitance	C _I	V _{CC} =0V-3.6V, V _{IN} =V _{CC} or GND	--	1.1	--	pF
Output Capacitance	C _{OUT}	V _{CC} =0V, V _{OUT} =GND	--	1.7	--	pF


OPERATING CHARACTERISTICS (f=10MHz, TA =25°C , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C _{PD}	V _{CC} =0.9V	--	2.5	--	pF
		V _{CC} =1.2±0.1V	--	2.7	--	pF
		V _{CC} =1.5±0.1V	--	2.8	--	pF
		V _{CC} =1.8±0.15V	--	3.0	--	pF
		V _{CC} =2.5±0.2V	--	3.5	--	pF
		V _{CC} =3.3±0.3V	--	4.0	--	pF

SWITCHING CHARACTERISTICS (TA =25°C , unless otherwise specified)



PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Propagation delay from inputs (A) to output(Y)	t _{PD}	CL=5pF, RL=5KΩ	V _{CC} =0.9V	--	19	--	ns
			V _{CC} =1.2V±0.1V	2.6	5.7	--	ns
			V _{CC} =1.5V±0.1V	2.4	4.2	--	ns
			V _{CC} =1.8V±0.15V	2.0	3.6	--	ns
			V _{CC} =2.5V±0.2V	1.9	3.0	--	ns
			V _{CC} =3.3V±0.3V	1.8	2.7	--	ns
		CL=10pF, RL=5KΩ	V _{CC} =0.9V	--	22.5	--	ns
			V _{CC} =1.2V±0.1V	2.9	6.6	--	ns
			V _{CC} =1.5V±0.1V	2.6	4.8	--	ns
			V _{CC} =1.8V±0.15V	2.5	4.2	--	ns
			V _{CC} =2.5V±0.2V	2.3	3.5	--	ns
			V _{CC} =3.3V±0.3V	2.1	3.3	--	ns
		CL=15pF, RL=5KΩ	V _{CC} =0.9V	--	26	--	ns
			V _{CC} =1.2V±0.1V	3.2	7.4	--	ns
			V _{CC} =1.5V±0.1V	3.1	5.4	--	ns
			V _{CC} =1.8V±0.15V	2.7	4.7	--	ns
			V _{CC} =2.5V±0.2V	2.6	4.0	--	ns
			V _{CC} =3.3V±0.3V	2.5	3.7	--	ns
		CL=30pF, RL=5KΩ	V _{CC} =0.9V	--	36.3	--	ns
			V _{CC} =1.2V±0.1V	3.9	9.7	--	ns
			V _{CC} =1.5V±0.1V	3.5	7.0	--	ns
			V _{CC} =1.8V±0.15V	3.5	6.0	--	ns
			V _{CC} =2.5V±0.2V	3.4	5.1	--	ns
			V _{CC} =3.3V±0.3V	3.3	4.8	--	ns

TEST CIRCUIT AND WAVEFORMS

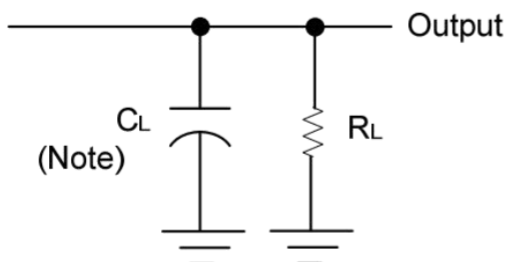

Note: C_L includes probe and jig capacitance.

	$V_{CC} = 0.8\text{ V}$	$V_{CC} = 1.2\text{ V}$ $\pm 0.1\text{ V}$	$V_{CC} = 1.5\text{ V}$ $\pm 0.1\text{ V}$	$V_{CC} = 1.8\text{ V}$ $\pm 0.15\text{ V}$	$V_{CC} = 2.5\text{ V}$ $\pm 0.2\text{ V}$	$V_{CC} = 3.3\text{ V}$ $\pm 0.3\text{ V}$
C_L	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF
V_M	$V_{CC}/2$	$V_{CC}/2$	$V_{CC}/2$	$V_{CC}/2$	$V_{CC}/2$	$V_{CC}/2$
V_I	V_{CC}	V_{CC}	V_{CC}	V_{CC}	V_{CC}	V_{CC}

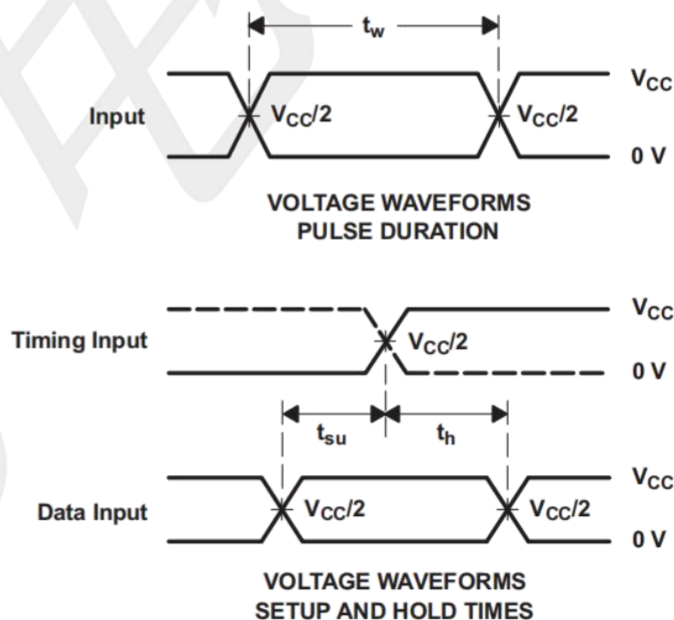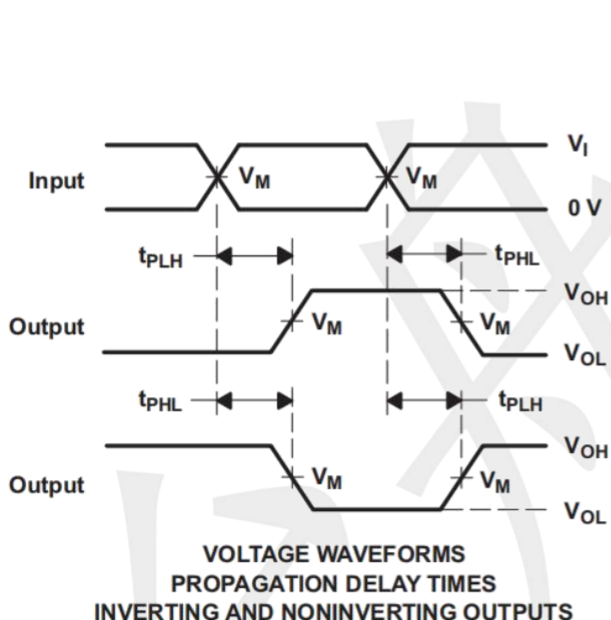


NOTES:

- C_L includes probe and jig capacitance.
- All input pulses are supplied by generators having the following characteristics: $PRR \leq 10\text{ MHz}$, $Z_O = 50\text{ }\Omega$, $t_r/t_f = 3\text{ ns}$.
- The outputs are measured one at a time, with one transition per measurement.
- t_{PLH} and t_{PHL} are the same as t_{pd} .
- All parameters and waveforms are not applicable to all devices.

Package information (Unit: mm)

SOT353

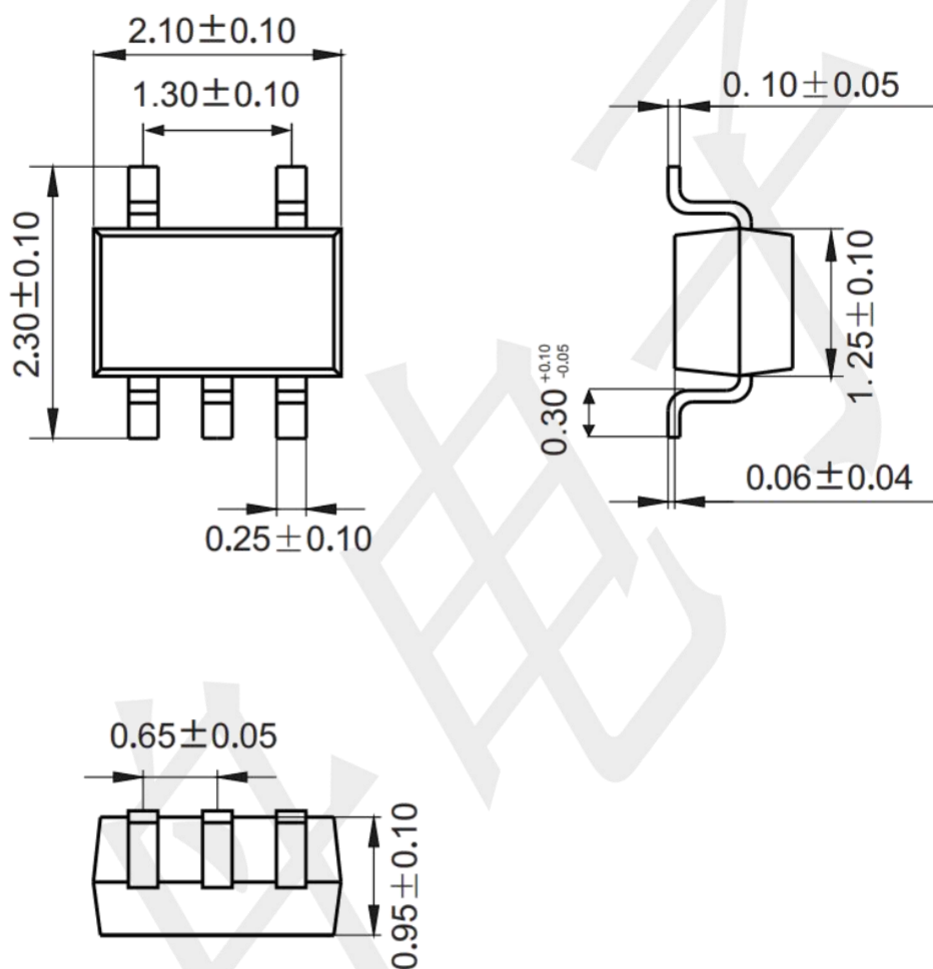

Mounting Pad Layout (unit: mm)

