
SPTECH Silicon NPN Power Transistor

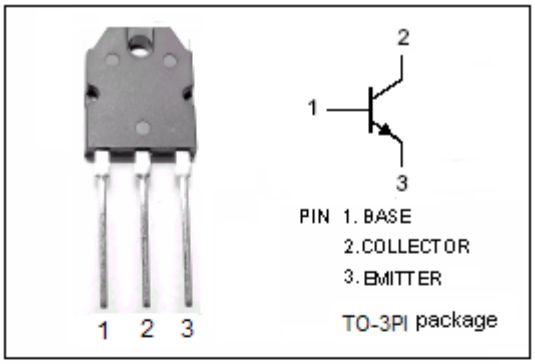

DESCRIPTION


- Low Collector Saturation Voltage-
  : $V_{CE(sat)}$= 2.0V(Min) @I_C= 6A
- Good Linearity of h_{FE}
- Complement to Type 2SA1940

APPLICATIONS

- Power amplifier applications
- Recommend for 55W high fidelity audio frequency amplifier output stage applications

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	120	V
V_{CEO}	Collector-Emitter Voltage	120	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	8	A
I_B	Base Current-Continuous	0.8	A
P_C	Collector Power Dissipation @ T_C=25℃	80	W
T_J	Junction Temperature	150	℃
T_{stg}	Storage Temperature Range	-55~150	℃

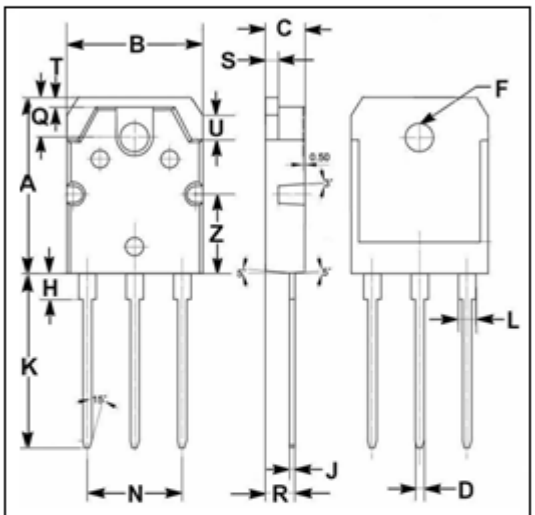

DIM	mm MIN	MAX
A	19.90	20.10
B	15.50	15.70
C	4.40	4.60
D	0.90	1.10
F	3.20	3.40
H	2.90	3.10
J	0.50	0.70
K	19.90	20.10
L	1.90	2.10
N	10.80	11.00
Q	4.40	4.60
R	3.30	3.35
S	1.40	1.60
T	1.00	1.20
U	2.10	2.30
Z	8.90	9.10

SPTECH Silicon NPN Power Transistor

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified


SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	I_C= 50mA ; I_B= 0	120			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= 6A; I_B= 0.6A			2.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	I_C= 4A ; V_{CE}= 5V			1.5	V
I_{CBO}	Collector Cutoff Current	V_{CB}= 120V ; I_E= 0			5	μ A
I_{EBO}	Emitter Cutoff Current	V_{EB}= 5V; I_C= 0			5	μ A
h_{FE-1}	DC Current Gain	I_C= 1A ; V_{CE}= 5V	55		160	
h_{FE-2}	DC Current Gain	I_C= 4A ; V_{CE}= 5V	35			
C_{OB}	Output Capacitance	I_E= 0; V_{CB}= 10V;f_{test}= 1.0MHz		120		pF
f_T	Current-Gain—Bandwidth Product	I_C= 1A ; V_{CE}= 5V		30		MHz

◆ **h_{FE-1} Classifications**


R	O
55-110	80-160

SPTECH Silicon NPN Power Transistor


I_C–V_{CE} Characteristics

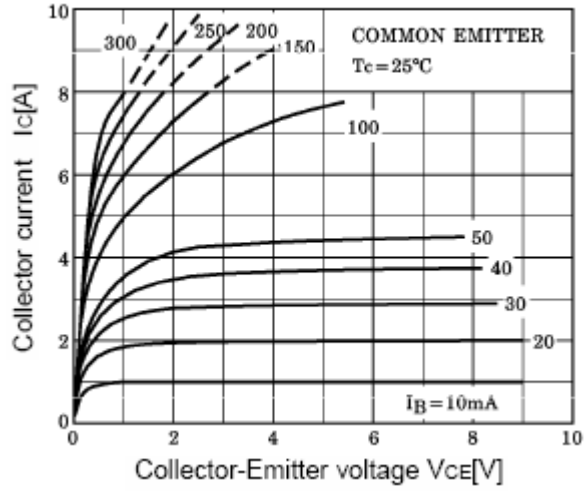


I_C–V_{BE} Characteristics

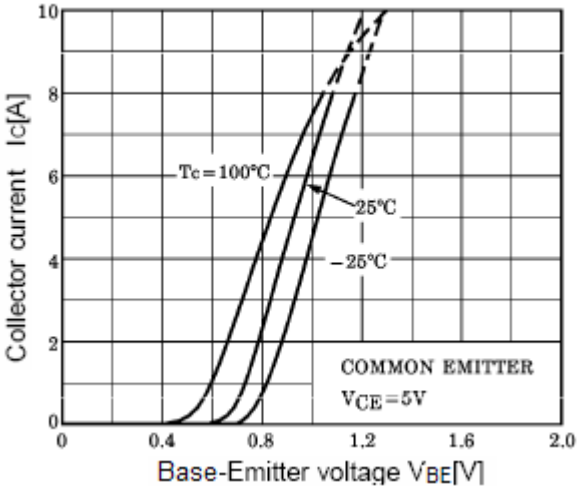

$V_{CE(sat)}$–I_C Characteristics

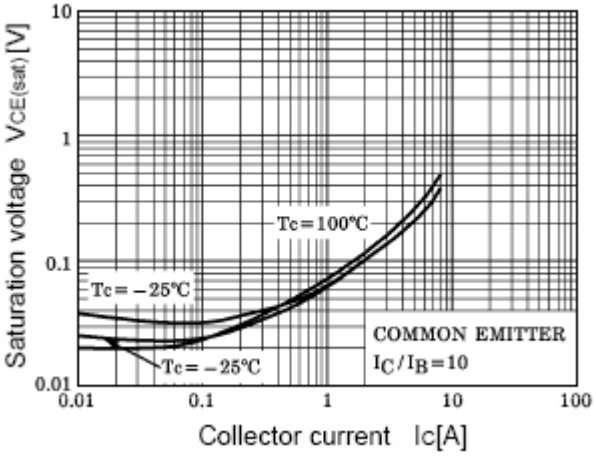

h_{FE}–I_C Characteristics

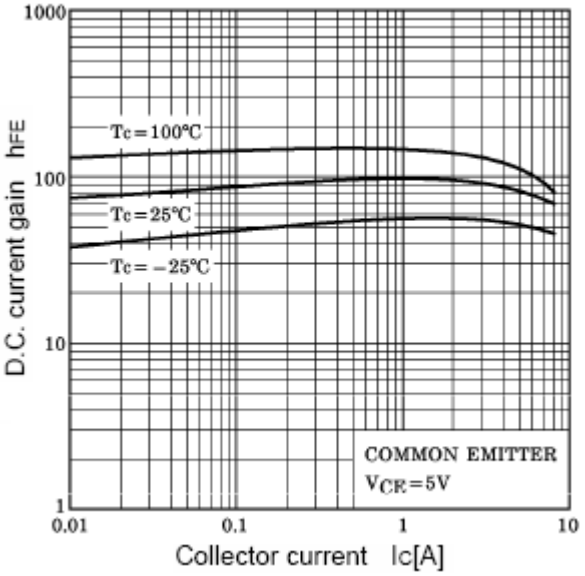

Safe Operating Area

