
SPTECH Silicon PNP Darlington Power Transistor

DESCRIPTION

- High DC Current Gain-
  : h_{FE} = 1000(Min)@ I_C= -3A
- Collector-Emitter Sustaining Voltage-
  : $V_{CEO(SUS)}$ = -80V(Min)
- Low Collector-Emitter Saturation Voltage-
  : $V_{CE(sat)}$ = -2.0V(Max)@ I_C= -3A
  = -4.0V(Max)@ I_C= -5A
- Complement to Type TIP121

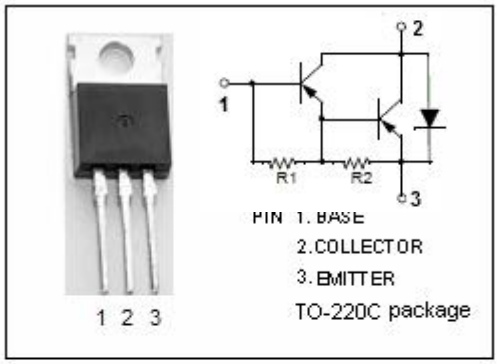

APPLICATIONS


- Designed for general purpose amplifier and low speed switching applications.

ABSOLUTE MAXIMUM RATINGS (Ta=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-80	V
V_{CEO}	Collector-Emitter Voltage	-80	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-5	A
I_{CM}	Collector Current-Peak	-8	A
I_B	Base Current-DC	-120	mA
P_C	Collector Power Dissipation T_C=25℃	65	W
	Collector Power Dissipation T_a=25℃	2	
T_j	Junction Temperature	150	℃
T_{stg}	Storage Temperature Range	-65~150	℃

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j\text{-}c}$	Thermal Resistance,Junction to Case	1.92	℃/W
$R_{th\ j\text{-}a}$	Thermal Resistance,Junction to Ambient	62.5	℃/W

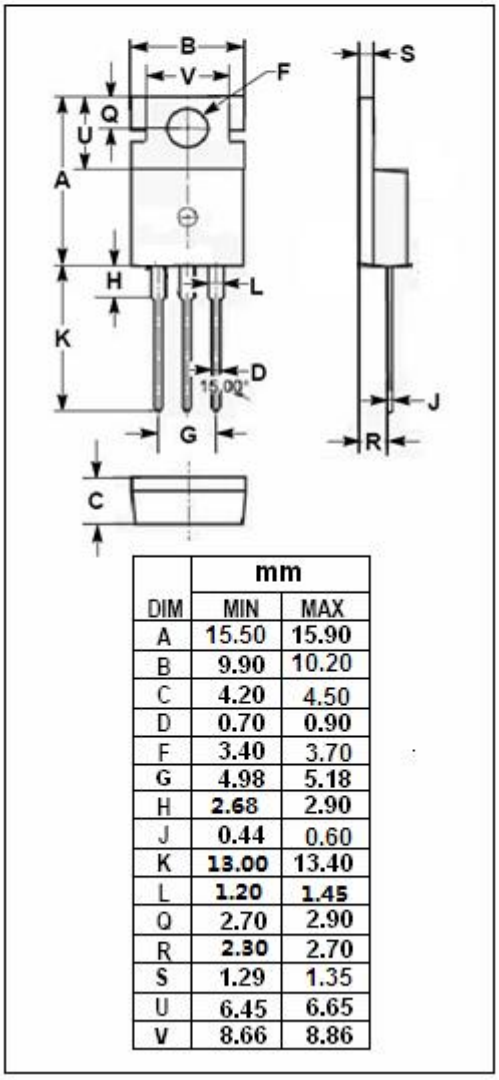

DIM	mm MIN	MAX
A	15.50	15.90
B	9.90	10.20
C	4.20	4.50
D	0.70	0.90
F	3.40	3.70
G	4.98	5.18
H	2.68	2.90
J	0.44	0.60
K	13.00	13.40
L	1.20	1.45
Q	2.70	2.90
R	2.30	2.70
S	1.29	1.35
U	6.45	6.65
V	8.66	8.86

SPTECH Silicon PNP Darlington Power Transistor

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	I_C= -30mA, I_B= 0	-80			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	I_C= -3A, I_B= -12mA			-2.0	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation voltage	I_C= -5A, I_B= -20mA			-4.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	I_C= -3.0A; V_{CE}= -3V			-2.5	V
I_{CBO}	Collector Cutoff Current	V_{CB}= -80V, I_E= 0			-0.2	mA
I_{CEO}	Collector Cutoff Current	V_{CE}= -40V, I_B= 0			-0.5	mA
I_{EBO}	Emitter Cutoff Current	V_{EB}= -5V; I_C= 0			-2	mA
h_{FE-1}	DC Current Gain	I_C= -0.5A; V_{CE}= -3V	1000			
h_{FE-2}	DC Current Gain	I_C= -3.0A; V_{CE}= -3V	1000			
C_{OB}	Output Capacitance	I_E= 0; V_{CB}= -10V, f= 0.1MHz			300	pF