
Features

- Available Output Voltage:5.0V
- Maximum Input Voltage: 35V
- Maximum Output Current:
  Exceed 1A at T_J = 25°C
- Output Tolerances:
  ±3% at T_J = 25°C
  ±5% over the Operating T_J
- No External Components

Applications

- Motor Drives
- On-Card Regulation
- Portable Devices
- Telecommunications
- TVs and Set-top Boxes




- 1: IN
- 2: GND
- 3: OUT

TO-252-2L
(DPAK)

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
L7805CDT	TO-252-2L (DPAK)	78M05	2500

Typical Application Circuit

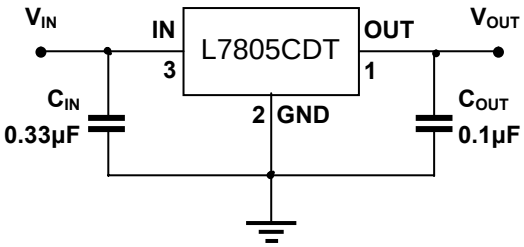

Conventional Circuit

Absolute Maximum Ratings

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Maximum input voltage	V_{IN}	35	V
Maximum junction temperature	$T_{J\ Max}$	150	°C
Storage temperature	T_{stg}	- 65 ~ 150	°C
Soldering temperature & time	T_{solder}	260°C, 10s	-


Electrical Characteristics

78M05 (V_{IN} = 10V, I_{OUT} = 500mA, C_{IN} = 0.33μF, C_{OUT} = 0.1μF, T_J = 25°C, unless otherwise specified)


Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	Tj=25°C	4.8	5.0	5.2	V
		5.0mA<Io<1.0A,Po<15W Vi=7.5V to 20V	4.75	5.00	5.25	V
Line regulation	ΔVo	Tj=25°C,Vi=7.5V to 20V		4	100	mV
		Tj=25°C,Vi=8V to 12V		2	50	mV
Load regulation	ΔVo	Tj=25°C,Io=5.0mA to 1.0A		9	100	mV
		Tj=25°C,Io=250mA to 750mA		4	50	mV
Quiescent current	I_Q	Tj=25°C		4.2	8	mA
Quiescent current change	ΔI_Q	Io=5mA to 1.0A		0.03	0.5	mA
		Vi=8V to 25V, Io=500mA		0.3	0.8	mA
Output voltage drift	ΔVo/ΔT	Io=5mA		0.8		mV/°C
Output noise voltage	V_N	f=10Hz to 100kHz,Ta=25°C		42		μV/Vo
Ripple rejection	RR	f=120Hz, Vi=8V to 18V	62	73		dB
Dropout voltage	Vo	Io=1.0A,Tj=25°C		2		V
Output resistance	Ro	f=1kHz		15		mΩ
Short circuit current	Isc	Vi=35V,Ta=25°C		200		mA

Typical Characteristics


Output Characteristics

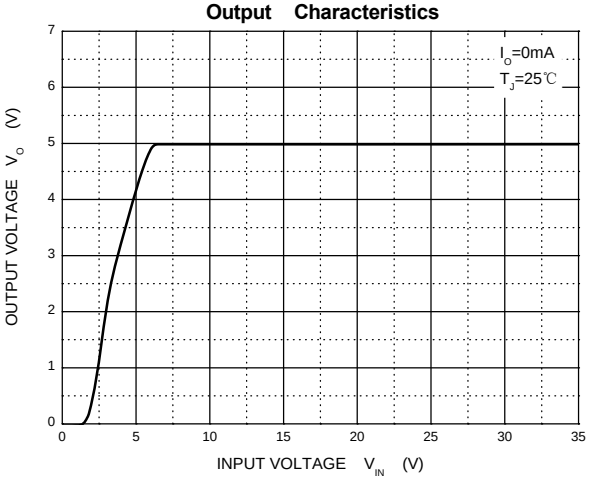


Dropout Characteristics

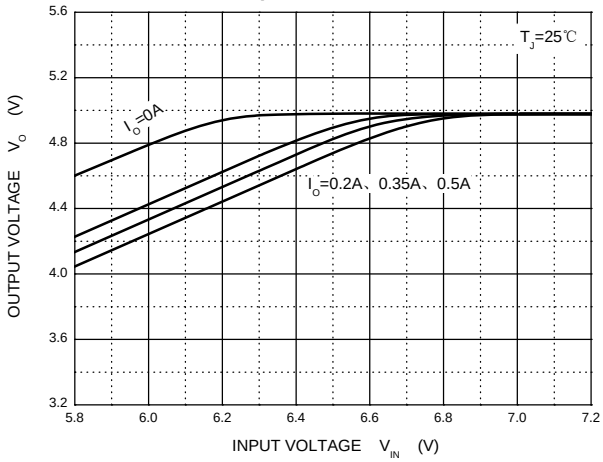


Quiescent Current

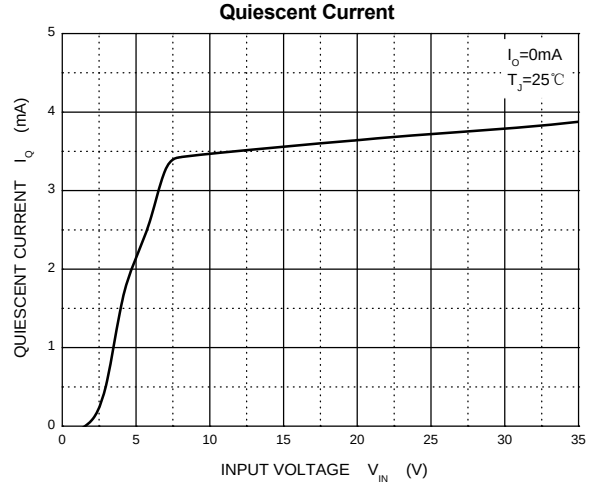


Current Cut-off Grid Voltage

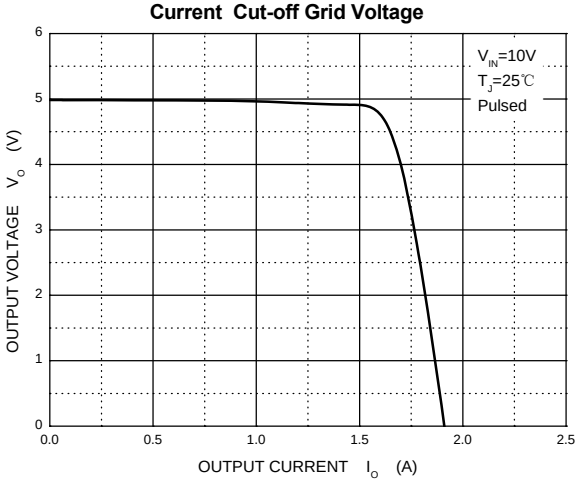


Output Voltage vs Junction Temperature

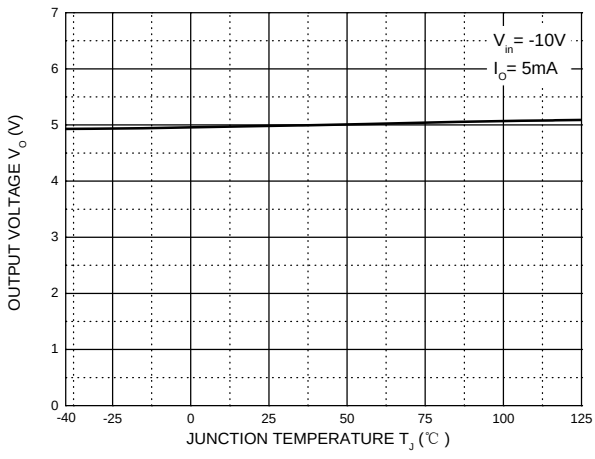

Power Derating Curve

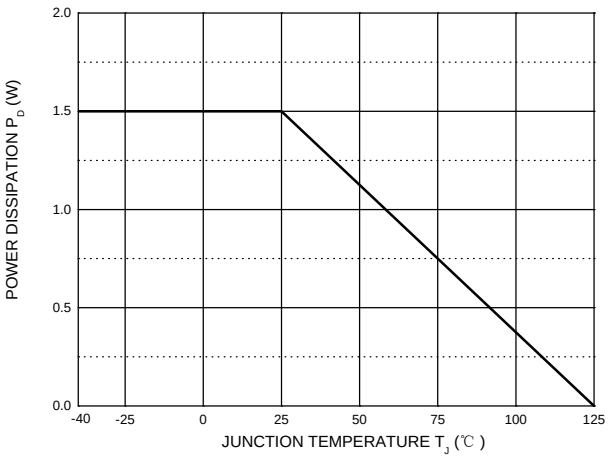

TO-252-2L(DPAK) Package Information

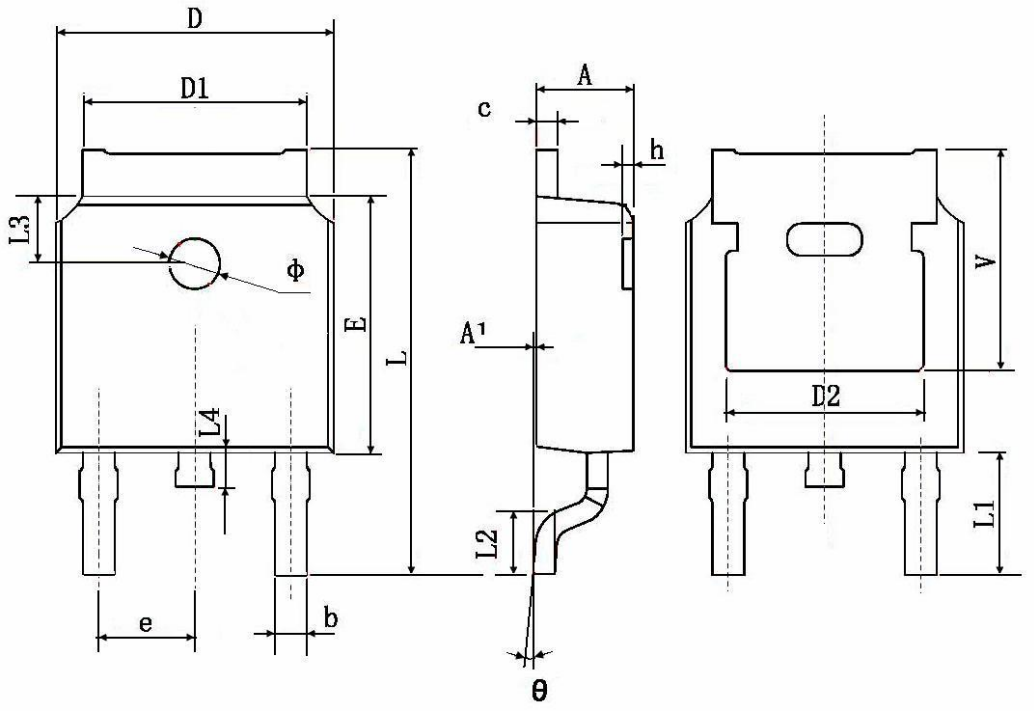

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	0.483 TYP.		0.190 TYP.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 TYP.		0.114 TYP.	
L2	1.400	1.700	0.055	0.067
L3	1.600 TYP.		0.063 TYP.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 TYP.		0.211 TYP.	

Attention

■ Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.

■ HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.

■ Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could
give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.