Silicon Carbide Schottky Diode 650 V, 6 A

Features

- Low conduction loss due to low V_F
- Extremely low switching loss by tiny Q_C
- Highly rugged due to better surge current
- Industrial standard quality and reliability

Applications

- UPS
- Power Inverter
- High performance SMPS
- Power factor correction

Product Summary

V_{RRM}	650 V
I_F (T_C 160℃)	6 A
V_F (T_j 25℃)	1.3 V



TO-252-2

Package Marking and Ordering Information

Part #	Marking	Package
PSD065D06	PSD065D06	TO-252-2

Silicon Carbide Schottky Diode 650 V, 6 A

Maximum Ratings (at Tc = 25 °C, unless otherwise specified)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	650	V
Surge Peak Reverse Voltage	V_{RSM}	650	V
DC Peak Reverse Voltage	V_R	650	V
Continuous Forward Current T_C = 25°C T_C = 135°C T_C = 160°C	I_F	 23 11 6	A
Repetitive Peak Forward Surge Current T_C = 25°C,t_p=10ms,Half Sine Pulse T_C = 110°C,t_p=10ms,Half Sine Pulse	I_{FRM}	 28 17	A
Non-Repetitive Forward Surge Current T_C = 25°C,t_p=10ms,Half Sine Pulse T_C = 110°C,t_p=10ms,Half Sine Pulse	I_{FSM}	 48 43	A
i^2dt value T_C = 25°C,t_p=10ms,Half Sine Pulse T_C = 110°C,t_p=10ms,Half Sine Pulse	$\int i^2dt$	 11.4 9.1	A^2s
Power dissipation T_C = 25°C T_C = 110°C	P_{tot}	 68 29	W
Operating junction Range	T_j	-55 to +175	°C
Storage temperature Range	T_{stg}	-55 to +150	°C

Thermal Resistance

Parameter	Symbol	Typ.	Unit
Thermal resistance, junction – case.	R_{thJC}	2.19	°C/W

Silicon Carbide Schottky Diode 650 V, 6 A

Electrical Characteristic (at Tc = 25 °C, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Forward Voltage	V_F	- -	1.3 1.5	1.5	V	I_F=6A T_j=25°C T_j=175°C
Reverse Current	I_R	- -	- -	50 200	μA	V_R=650V T_j=25°C T_j=175°C
Total Capacitive Charge	Q_C	-	18	-	nC	V_R=400V，T_j=25℃ $Q_C = \int_0^{V_R} C(V)dV$
Total Capacitance	C	- - -	358 36 30	- - -	pF	T_j=25℃, f=1MHz V_R=0V V_R=200V V_R=400V

Characteristics Curve:

Fig 1: Forward Characteristics

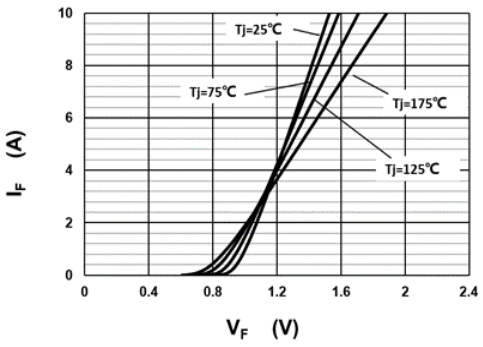


Fig 2: Reverse Characteristics

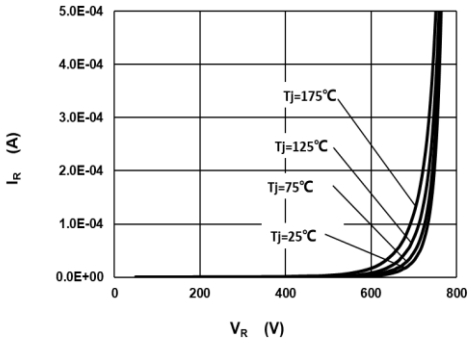


Fig 3: Current Derating

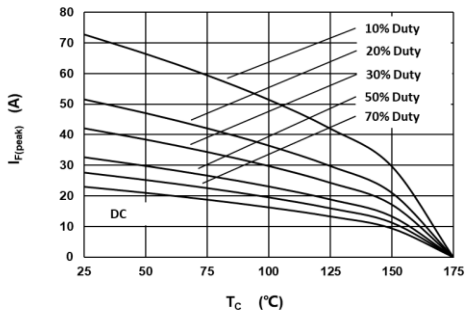


Fig 4: Power Derating

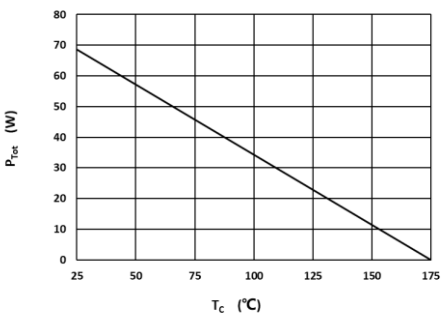


Fig 5: Capacitance vs. Reverse Voltage

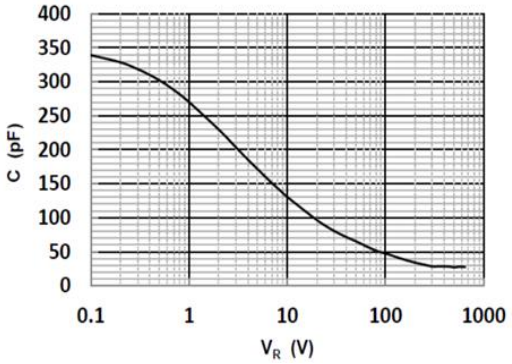


Fig 6: Reverse Charge vs. Reverse Voltage

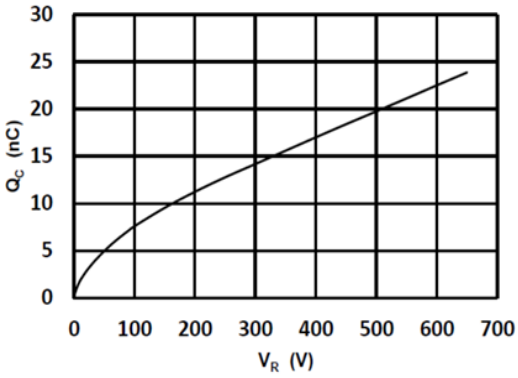


Fig 7: Typical Capacitance Stored Energy



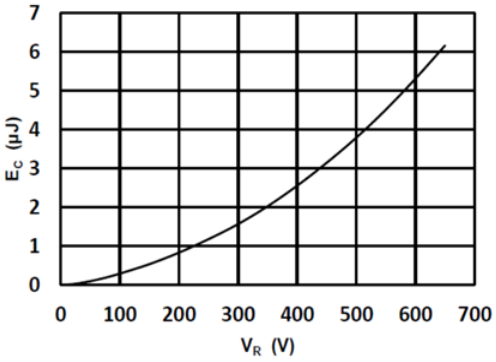


Fig 8: Transient Thermal Impandance

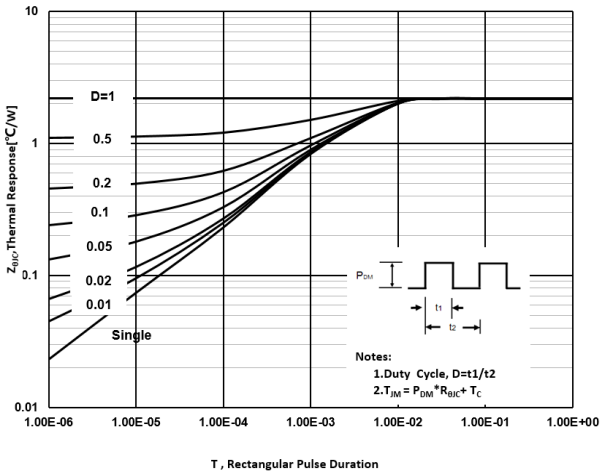

Silicon Carbide Schottky Diode 650 V, 6 A

Mechanical Dimensions:

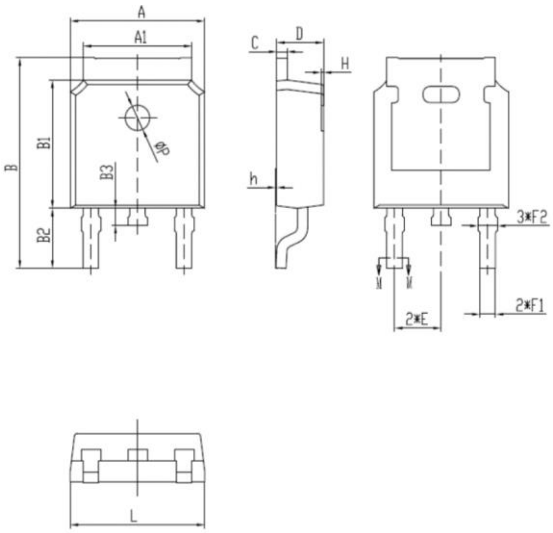

项目	规范(mm)	
	MIN	MAX
A	6.50	6.70
A1	5.16	5.46
B	9.77	10.17
B1	6.00	6.20
B2	2.60	3.00
B3	0.70	0.90
C	0.45	0.61
D	2.20	2.40
E	2.186	2.386
F1	0.67	0.87
F2	0.76	0.96
H	0.00	0.30
h	0.00	0.127
L	6.50	6.70
ΦP	1.10	1.30