

SOT-523

FEATURES

Complimentary to S8550T

Collector Current: I_C=0.5A

MARKING: J3Y

MAXIMUM RATINGS (T_A=25℃ unless otherwise noted)


Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	40	V
V_{CEO}	Collector-Emitter Voltage	25	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current -Continuous	0.5	A
P_C	Collector Dissipation	0.3	W
T_j	Junction Temperature	150	℃
T_{stg}	Storage Temperature	-55-150	℃

ELECTRICAL CHARACTERISTICS (Tamb=25℃ unless otherwise specified)


Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	I_C= 100μA, I_E=0	40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	I_C=1mA, I_B=0	25			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	I_E=100μA, I_C=0	5			V
Collector cut-off current	I_{CBO}	V_{CB}=40 V, I_E=0			0.1	μA
Collector cut-off current	I_{CEO}	V_{CE}=20V, I_E=0			0.1	μA
Emitter cut-off current	I_{EBO}	V_{EB}= 5V, I_C=0			0.1	μA
DC current gain	$H_{FE(1)}$	V_{CE}=1V, I_C= 50mA	120		400	
	$H_{FE(2)}$	V_{CE}=1V, I_C= 500mA	50			
Collector-emitter saturation voltage	V_{CE}(sat)	I_C=500 mA, I_B= 50mA			0.6	V
Base-emitter saturation voltage	V_{BE}(sat)	I_C=500 mA, I_B= 50mA			1.2	V
Transition frequency	f_T	V_{CE}=6V, I_C= 20mA f=30MHz	150			MHz

WPMtek


Typical Characteristics

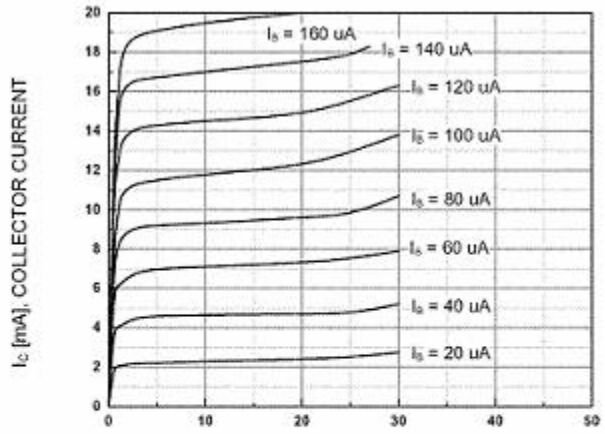


Static Characteristic

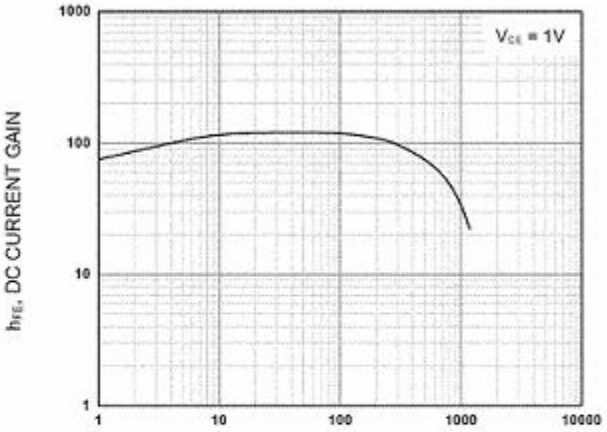

DC current Gain

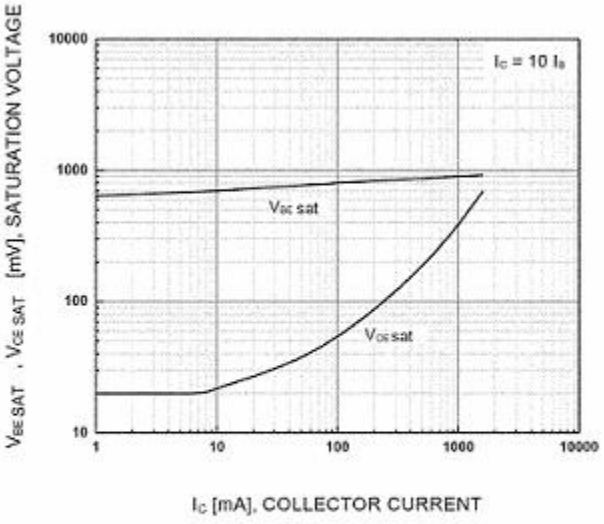


Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

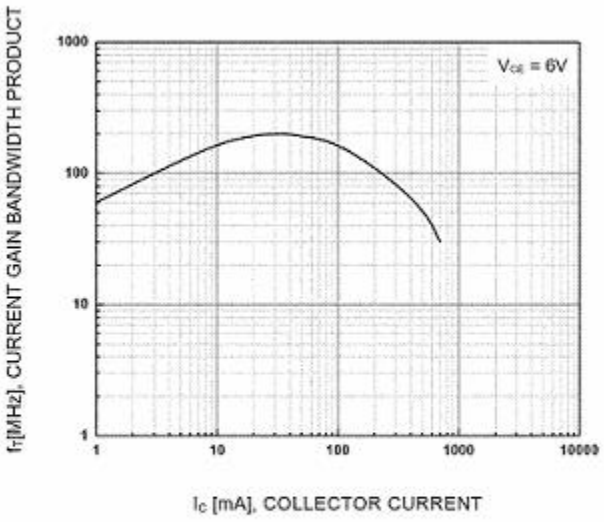



Current Gain Bandwidth Product

WPMtek

SOT-523 Package Outline Dimensions

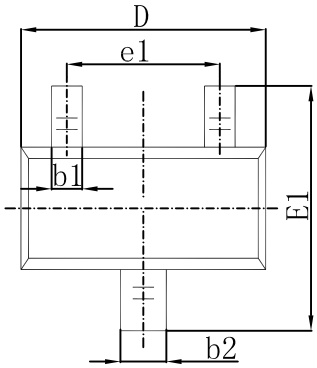


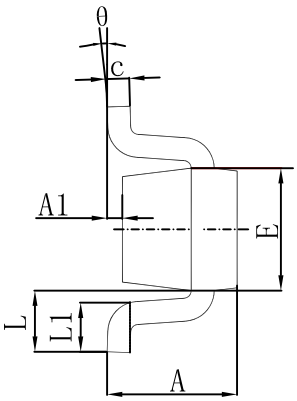



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-523 Suggested Pad Layout



Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

WPMtek reserves the right to make changes to the product specification and data in this document without notice. WPMtek makes no warranty, representation or guarantee regarding the suitability of its products for any particu lar purpose, nor does WPMtek assume any liability arising from the application or use of any products or circuits, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Any enquiry ,please write to sales@wpmtek.com for futher information.