
# Zener Voltage Regulators

## 200 mW SOD–523 Surface Mount


- We declare that the material of product compliance with RoHS requirements and Halogen Free.

**LM5Z2V0T1G Series**
**S-LM5Z2V0T1G Series**




**SOD– 523**

**MARKING DIAGRAM**




xx= Specific Device Code
M = Month Code




**ORDERING INFORMATION**

| Device | Package | Shipping |
|---|---|---|
| LM5Z2V0T1G Series | SOD-523 | 5000/Tape&Reel |
| LM5Z2V0T5G Series | SOD-523 | 10000/Tape&Reel |

This series of Zener diodes is packaged in a SOD–523 surface mount package.They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium. They are well suited for applications such as cellular phones, hand held portables, and high density PC boards.

### Specification Features:

- Standard Zener Breakdown Voltage Range – 2.0 V to 75 V
- Steady State Power Rating of 200 mW
- Small Body Outline Dimensions: 0.047" x 0.032"(1.20 mm x 0.80 mm)
- Low Body Height: 0.028" (0.7 mm)
- ESD Rating of Class 3 (>16 kV) per Human Body Model
- S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

### Mechanical Characteristics:

**CASE:** Void-free, transfer-molded,thermosetting plastic
Epoxy Meets UL 94 V-0

**LEAD FINISH:** 100% Matte Sn (Tin)

**QUALIFIED MAX REFLOW TEMPERATURE:**260°C
Device Meets MSL 1 Requirements

**MOUNTING POSITION:** Any

**MAXIMUM RATINGS**

| Rating | Symbol | Max | Unit |
|---|---|---|---|
| Total Device Dissipation FR−4 Board, @ $T_A$ = 25°C | $P_D$ | 200 | mW |
| Thermal Resistance | | | |
| Junction–to–Ambient(Note 1) | $R_{\Theta JA}$ | 520 | ºC/W |
| Junction–to–Case | $R_{\Theta JC}$ | 220 | ºC/W |
| Junction and Storage Temperature Range | $T_J$, $T_{stg}$ | −65 to +150 | °C |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.


1.Device mounted on an FR-4 PCB, single-sided copper, tin-plated and standard footprint.

## LM5Z2V0T1G Series , S-LM5Z2V0T1G Series

### ELECTRICAL CHARACTERISTICS

($T_A$ = 25°C unless otherwise noted,
$V_F$ = 0.9 V Max. @ $I_F$ = 10 mA for all types)

| Symbol | Parameter |
|---|---|
| $V_Z$ | Reverse Zener Voltage @ $I_{ZT}$ |
| $I_{ZT}$ | Reverse Current |
| $Z_{ZT}$ | Maximum Zener Impedance @ $I_{ZT}$ |
| $I_{ZK}$ | Reverse Current |
| $Z_{ZK}$ | Maximum Zener Impedance @ $I_{ZK}$ |
| $I_R$ | Reverse Leakage Current @ $V_R$ |
| $V_R$ | Reverse Voltage |
| $I_F$ | Forward Current |
| $V_F$ | Forward Voltage @ $I_F$ |
| $\Theta V_Z$ | Maximum Temperature Coefficient of $V_Z$ |
| C | Max. Capacitance @$V_R$ = 0 and f = 1 MHz |

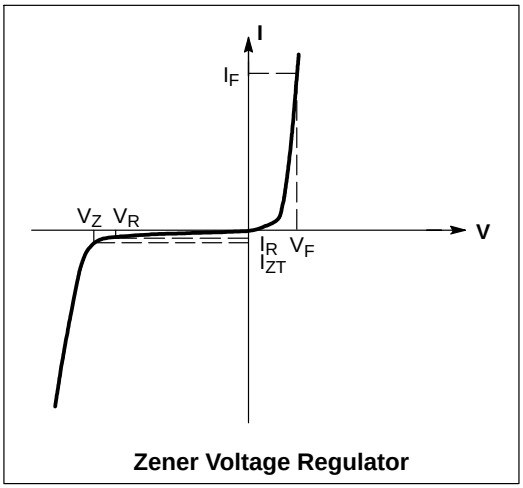


**Zener Voltage Regulator**

## LM5Z2V0T1G Series , S-LM5Z2V0T1G Series

**ELECTRICAL CHARACTERISTICS** ($T_A$ = 25°C unless otherwise noted, $V_F$ = 0.9 V Max. @ $I_F$ = 10 mA for all types)

| Device | Device Marking | Zener Voltage (Note 2) $V_Z$ (Volts) Min | Nom | Max | @ $I_{ZT}$ mA | Zener Impedance $Z_{ZT}$ @ $I_{ZT}$ Ω | $Z_{ZK}$ @ $I_{ZK}$ Ω | mA | Leakage Current $I_R$ @ $V_R$ µA | Volts | C @ $V_R$ = 0 f = 1 MHz pF |
|---|---|---|---|---|---|---|---|---|---|---|---|
| LM5Z2V0T1G | WY | 1.91 | 2.0 | 2.09 | 5 | 100 | 600 | 1.0 | 150 | 1.0 | 450 |
| LM5Z2V4T1G | 00 | 2.2 | 2.4 | 2.6 | 5 | 100 | 1000 | 1.0 | 50 | 1.0 | 450 |
| LM5Z2V7T1G | 01 | 2.5 | 2.7 | 2.9 | 5 | 100 | 1000 | 1.0 | 20 | 1.0 | 450 |
| LM5Z3V0T1G | 02 | 2.8 | 3.0 | 3.2 | 5 | 100 | 1000 | 1.0 | 10 | 1.0 | 450 |
| LM5Z3V3T1G | 05 | 3.1 | 3.3 | 3.5 | 5 | 95 | 1000 | 1.0 | 5 | 1.0 | 450 |
| LM5Z3V6T1G | 06 | 3.4 | 3.6 | 3.8 | 5 | 90 | 1000 | 1.0 | 5 | 1.0 | 450 |
| LM5Z3V9T1G | 07 | 3.7 | 3.9 | 4.1 | 5 | 90 | 1000 | 1.0 | 3 | 1.0 | 450 |
| LM5Z4V3T1G | 08 | 4.0 | 4.3 | 4.6 | 5 | 90 | 1000 | 1.0 | 3 | 1.0 | 450 |
| LM5Z4V7T1G | 09 | 4.4 | 4.7 | 5.0 | 5 | 80 | 800 | 1.0 | 3 | 2.0 | 260 |
| LM5Z5V1T1G | 0A | 4.8 | 5.1 | 5.4 | 5 | 60 | 500 | 1.0 | 2 | 2.0 | 225 |
| LM5Z5V6T1G | 0C | 5.2 | 5.6 | 6.0 | 5 | 40 | 400 | 1.0 | 1 | 2.0 | 200 |
| LM5Z6V2T1G | 0E | 5.8 | 6.2 | 6.6 | 5 | 10 | 100 | 1.0 | 3 | 4.0 | 185 |
| LM5Z6V8T1G | 0F | 6.4 | 6.8 | 7.2 | 5 | 15 | 160 | 1.0 | 2 | 4.0 | 155 |
| LM5Z7V5T1G | 0G | 7.0 | 7.5 | 7.9 | 5 | 15 | 160 | 1.0 | 1 | 5.0 | 140 |
| LM5Z8V2T1G | 0H | 7.7 | 8.2 | 8.7 | 5 | 15 | 160 | 1.0 | 0.7 | 5.0 | 135 |
| LM5Z9V1T1G | 0K | 8.5 | 9.1 | 9.6 | 5 | 15 | 160 | 1.0 | 0.2 | 7.0 | 130 |
| LM5Z10VT1G | 0L | 9.4 | 10 | 10.6 | 5 | 20 | 160 | 1.0 | 0.1 | 8.0 | 130 |
| LM5Z11VT1G | 0M | 10.4 | 11 | 11.6 | 5 | 20 | 160 | 1.0 | 0.1 | 8.0 | 130 |
| LM5Z12VT1G | 0N | 11.4 | 12 | 12.7 | 5 | 25 | 80 | 1.0 | 0.1 | 8.0 | 130 |
| LM5Z13VT1G | 0P | 12.4 | 13.25 | 14.1 | 5 | 30 | 80 | 1.0 | 0.1 | 8.0 | 120 |
| LM5Z15VT1G | 0T | 14.3 | 15 | 15.8 | 5 | 30 | 200 | 1.0 | 0.05 | 10.5 | 110 |
| LM5Z16VT1G | 0U | 15.3 | 16.2 | 17.1 | 2 | 40 | 200 | 1.0 | 0.05 | 11.2 | 105 |
| LM5Z18VT1G | 0W | 16.8 | 18 | 19.1 | 2 | 45 | 225 | 1.0 | 0.05 | 12.6 | 100 |
| LM5Z20VT1G | 0Z | 18.8 | 20 | 21.2 | 2 | 55 | 225 | 1.0 | 0.05 | 14.0 | 85 |
| LM5Z22VT1G | 10 | 20.8 | 22 | 23.3 | 2 | 55 | 250 | 1.0 | 0.05 | 15.4 | 85 |
| LM5Z24VT1G | 11 | 22.8 | 24.2 | 25.6 | 2 | 70 | 120 | 1.0 | 0.05 | 16.8 | 80 |
| LM5Z27VT1G | 12 | 25.1 | 27 | 28.9 | 2 | 80 | 300 | 1.0 | 0.05 | 18.9 | 70 |
| LM5Z30VT1G | 14 | 28 | 30 | 32 | 2 | 80 | 300 | 1.0 | 0.05 | 21.0 | 70 |
| LM5Z33VT1G | 18 | 31 | 33 | 35 | 2 | 80 | 300 | 1.0 | 0.05 | 23.2 | 70 |
| LM5Z36VT1G | 19 | 34 | 36 | 38 | 2 | 90 | 500 | 1.0 | 0.05 | 25.2 | 70 |
| LM5Z39VT1G | 20 | 37 | 39 | 41 | 2 | 130 | 500 | 1.0 | 0.05 | 27.3 | 45 |
| LM5Z43VT1G | 21 | 40 | 43 | 46 | 2 | 150 | 500 | 1.0 | 0.05 | 30.1 | 40 |
| LM5Z47VT1G | 1A | 44 | 47 | 50 | 2 | 170 | 500 | 1.0 | 0.05 | 32.9 | 40 |
| LM5Z51VT1G | 1C | 48 | 51 | 54 | 2 | 180 | 500 | 1.0 | 0.05 | 35.7 | 40 |
| LM5Z56VT1G | 1D | 52 | 56 | 60 | 2 | 200 | 500 | 1.0 | 0.05 | 39.2 | 40 |
| LM5Z62VT1G | 1E | 58 | 62 | 66 | 2 | 215 | 500 | 1.0 | 0.05 | 43.4 | 35 |
| LM5Z68VT1G | 1F | 64 | 68 | 72 | 2 | 240 | 500 | 1.0 | 0.05 | 47.6 | 35 |
| LM5Z75VT1G | 1G | 70 | 75 | 79 | 2 | 255 | 500 | 1.0 | 0.05 | 52.5 | 35 |

2. Zener voltage is measured with a pulse test current $I_Z$ at an ambient temperature of 25°C.

## Typical Characteristics

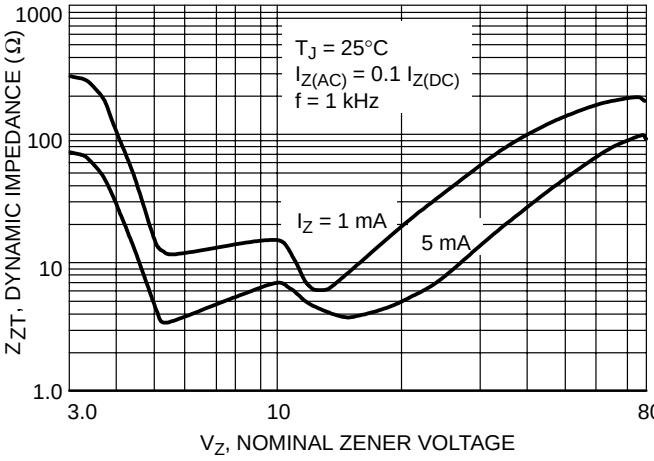



**Figure 1. Effect of Zener Voltage on Zener Impedance**

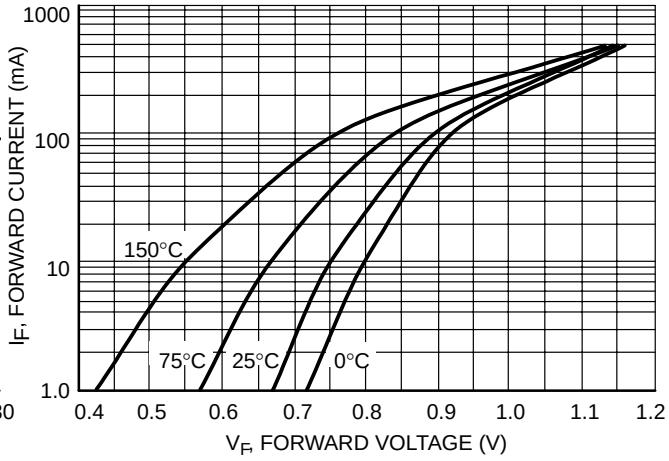



**Figure 2. Typical Forward Voltage**

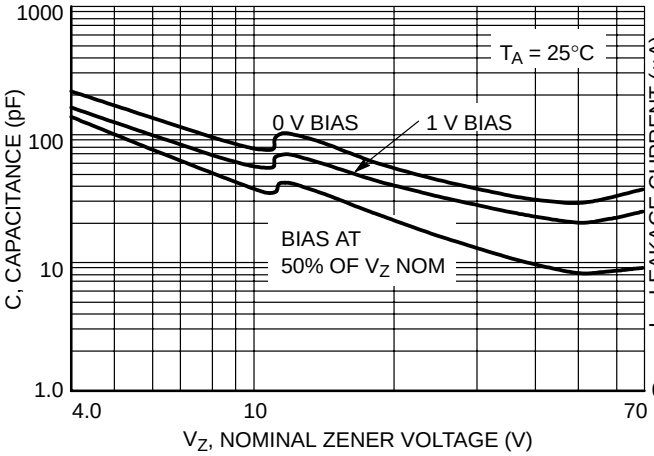



**Figure 3. Typical Capacitance**

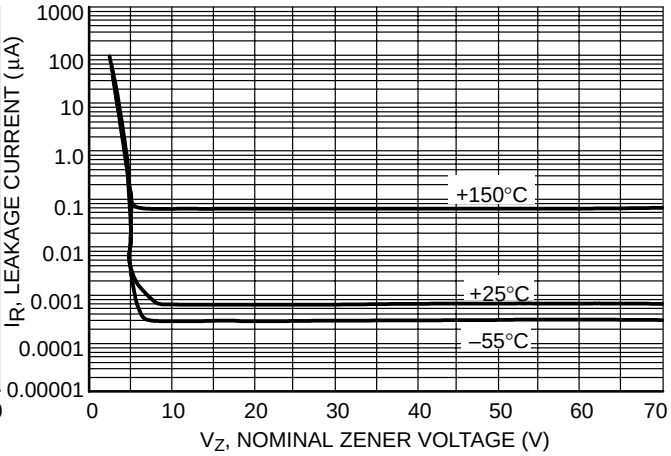



**Figure 4. Typical Leakage Current**

## Typical Characteristics

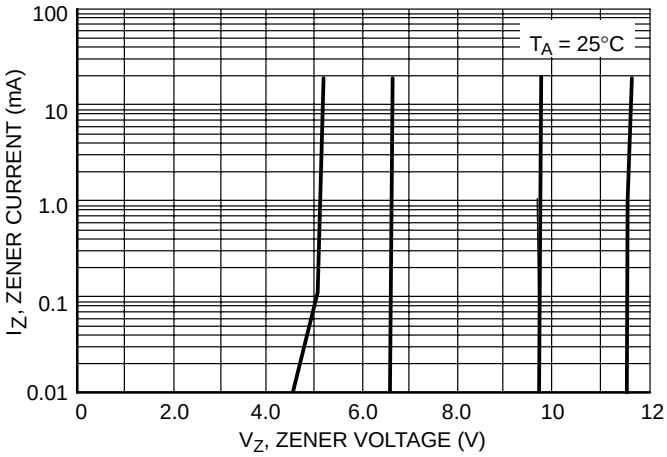



**Figure 5. Zener Voltage versus Zener Current ($V_Z$ Up to 12 V)**

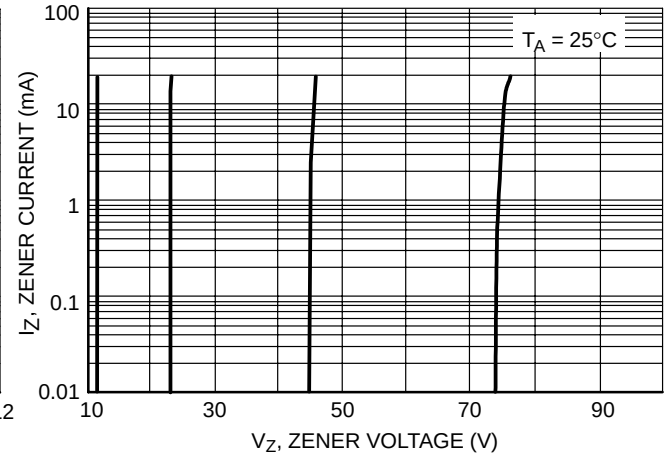



**Figure 6. Zener Voltage versus Zener Current (12 V to 75 V)**


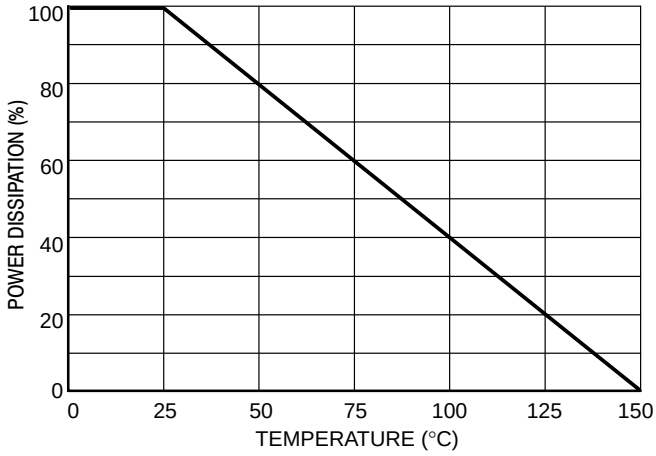




**Figure 7. Steady State Power Derating**

## LM5Z2V0T1G Series , S-LM5Z2V0T1G Series


## OUTLINE AND DIMENSIONS

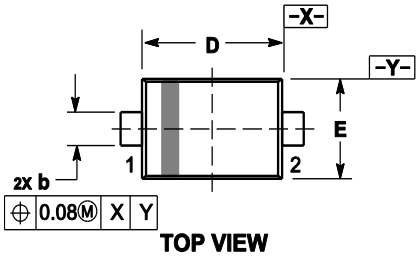


TOP VIEW




SIDE VIEW

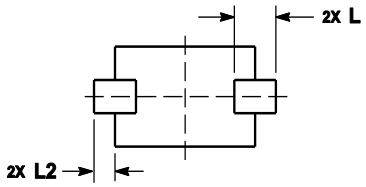



BOTTOM VIEW

Notes:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

| | MILLIMETERS | | | INCHES | | |
|---|---|---|---|---|---|---|
| DIM | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 0.50 | 0.60 | 0.70 | 0.020 | 0.024 | 0.028 |
| b | 0.25 | 0.30 | 0.35 | 0.010 | 0.012 | 0.014 |
| c | 0.07 | 0.14 | 0.20 | 0.003 | 0.006 | 0.008 |
| D | 1.10 | 1.20 | 1.30 | 0.043 | 0.047 | 0.051 |
| E | 0.70 | 0.80 | 0.90 | 0.028 | 0.031 | 0.035 |
| $H_E$ | 1.50 | 1.60 | 1.70 | 0.059 | 0.063 | 0.067 |
| L | 0.30 REF | | | 0.012 REF | | |
| $L_2$ | 0.15 | 0.20 | 0.25 | 0.006 | 0.008 | 0.010 |

## SOLDERING FOOTPRINT

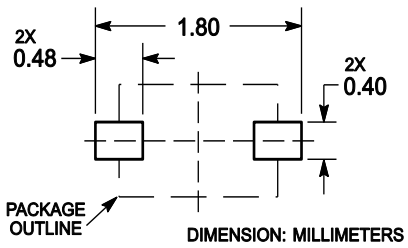


DIMENSION: MILLIMETERS

## DISCLAIMER

- Curve guarantee in the specification. The curve of test items with electric parameter is used as quality guarantee. The curve of test items without electric parameter is used as reference only.

- Before you use our Products for new Project, you are requested to carefully read this document and fully under--stand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.

- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products,please confirm the latest information with a LRC sales represe--ntative.