


RoHS Compliant

Process Capable

REV.	ZONE	DESCRIPTION	DESIGN	DATE
B	---	DRAWING UPGRADE	ZXM	2024.08.07
C	---	DRAWING UPGRADE	ZXM	2025.06.21




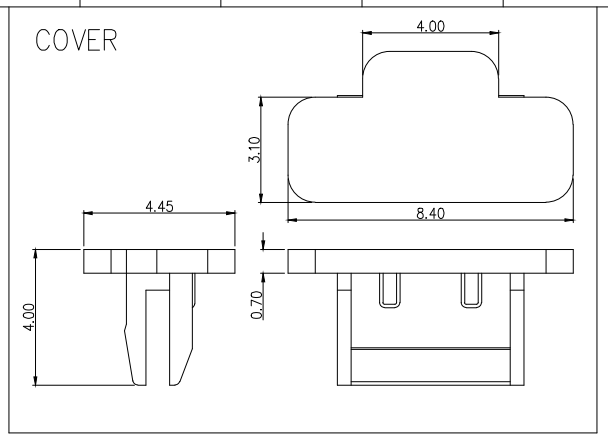


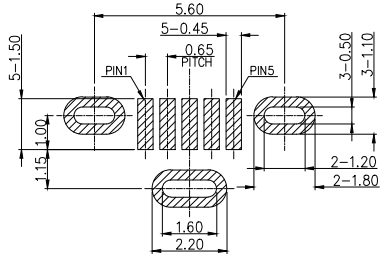


RECOMMEND PCB LAYOUT(THICKNESS=1.6mm)

TOLERANCE: ±0.05

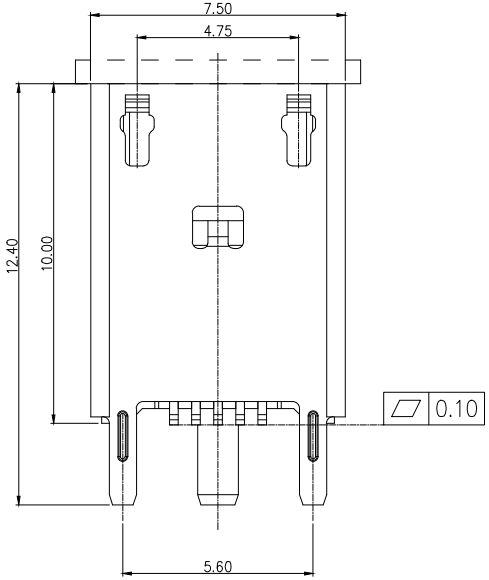


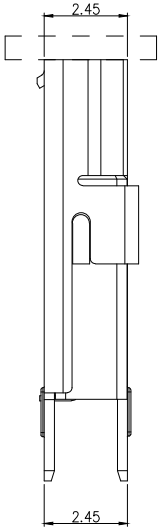

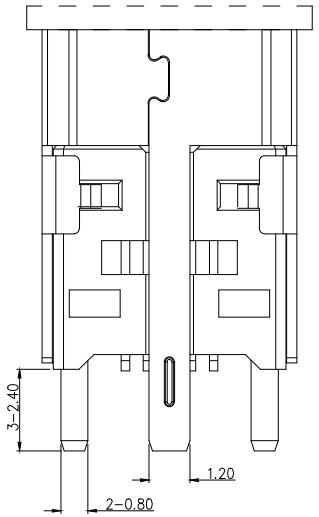

Specifications:

1. Current rating: 1A Max.
2. Dielectric withstanding: voltage: 100V(AC) for 1 min.
3. Contact resistance: 50mΩ Max.
4. Insulation resistance: 100MΩ Min.
5. Total mating force: 3.57 Kgf Max.
6. Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extration cycles
7. Temperature range: -30℃~+80℃



MICRO USB B TYPE PIN ASSIGNMENTS


PIN NUMBER	1	2	3	4	5
SIGNAL NAME	VBUS	D-	D+	ID	GND

X. ±0.50	X.° ± 2°	UNITS mm	广东创粤科技有限公司 Guangdong Chuangyue Technology Co.,Ltd
.X ±0.30	.X° ± 1°		
.XX ±0.20	.XX° ± 0.5°	MAT'L	TITLE: MICRO USB 5PIN立贴母座 三脚 高度H=10.0MM 直边
.XXX ±0.10		FINISH	APPD: CZN / DWG NO.: MICRO-5P-H10.0SMT-00123
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN CHUANGYUE TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Guangdong CHUANGYUE TECHNOLOGY CO., LTD		Q'TY	CHKD: CZJ / SCALE 1/1 / SHEET 1/2 / REV. C
			DR: ZXM


REV.	ZONE	DESCRIPTION	DESIGN	DATE
B	---	DRAWING UPGRADE	ZXM	2024.08.07
C	---	DRAWING UPGRADE	ZXM	2025.06.21

RoHS Compliant


Process Capable

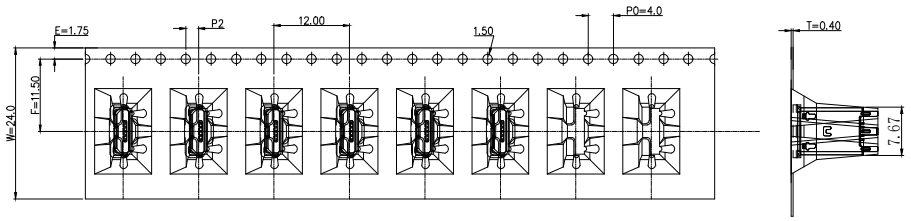


① 产品入载带示意图

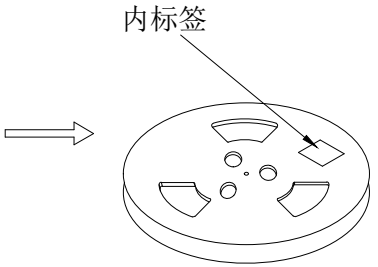


② 卷盘贴标签示意图



③ 产品叠层示意图

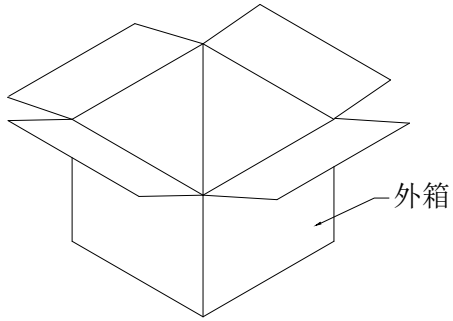

④ 产品入外箱示意图

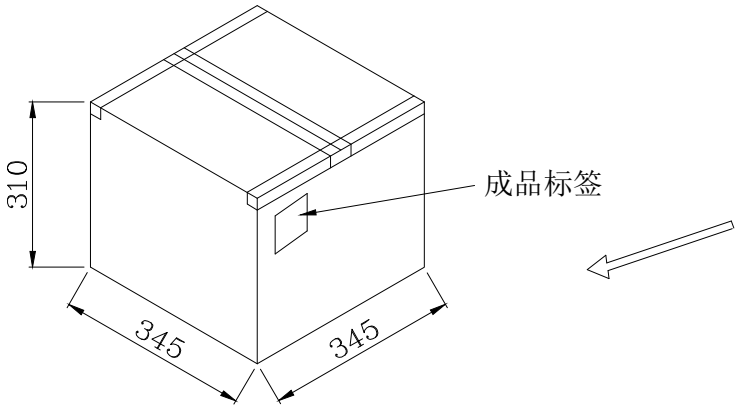

⑤ 外箱封箱示意图

	REEL	CARTON
CONNECTOR (PCS)	400	4400

包装说明：

1. 将检验好的成品;对插口朝前放入载带;每卷装400PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每11盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
   (产品包装的标签，如客户有要求，请按客户要求包装出货)
6. 载带前面留12PCS空格，后面留12PCS空格

X. ±0.50	X.° ± 2°	UNITS mm	广东创粤科技有限公司 Guangdong Chuangyue Technology Co.,Ltd
.X ±0.30	.X° ± 1°	MAT'L	TITLE: MICRO USB 5PIN母座H10.0-10.5MM包装规范
.XX ±0.10	.XX° ± 0.5°		
.XXX ±0.05		FINISH	APPD: CZN / DWG NO.: MICRO-5P-H10.0SMT-00123
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SHENZHEN CHUANGYUE TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPROOUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Guangdong CHUANGYUE TECHNOLOGY CO., LTD		Q'TY	CHKD: CZJ / SCALE N/A / SHEET 2/2 / REV. C
			DR: ZXM