由 Autodesk 教育版产品制作

RoHS

MAPX	MODIFICATION	DRW	DATE

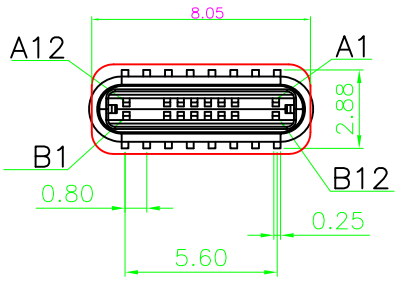



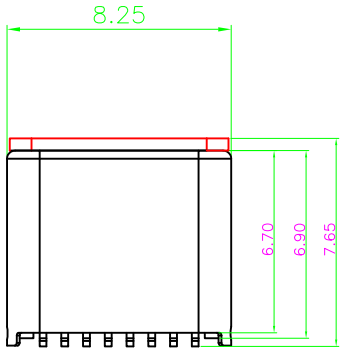





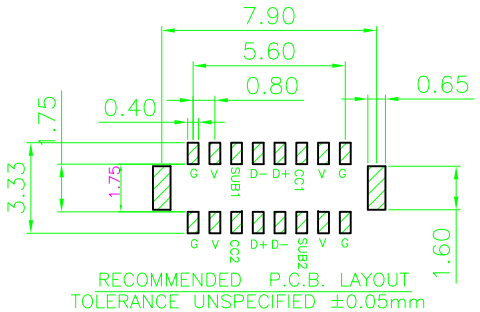

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTE :
TC01MA016SX01XR
1
1.Seletive Plating
S1:5u" Gold In Contact Area
100u" Tin In Tail Area
S2:0.8u" Gold In Contact Area
100u" Tin In Tail Area
S3:10u" Gold In Contact Area
100u" Tin In Tail Area
S4:15u" Gold In Contact Area
100u" Tin In Tail Area
S5:30u" Gold In Contact Area
100u" Tin In Tail Area
S9:3u" Gold In Contact Area
100u" Tin In Tail Area

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
7				
6				
5				
4	PLASTIC	HIGH TEMP	BLACK/WHITE	UL 94V-0
3	Latch	STAINLESS STEEL	——	Ni Plated
2	TERMINAL	COPPER ALLOY	——	Gold Plated
1	SHELL	STAINLESS STEEL	——	Ni Plated

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	许榕强	制图料号 PRODUCT PART NO.	
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	TYPE C 2.0 公座插头短体180° SMT 6.90
日期 DATE	2016-09-09	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

由 Autodesk 教育版产品制作