


30V N-Channel MOSFETS

RCQ3632

General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

PPAK3x3 Pin Configuration



Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current – Continuous ($T_c=25^\circ\text{C}$)	38	A
	Drain Current – Continuous ($T_c=100^\circ\text{C}$)	30	A
I_{DM}	Drain Current – Pulsed ¹	192	A
EAS	Single Pulse Avalanche Energy ²	45	mJ
IAS	Single Pulse Avalanche Current ²	30	A
P_D	Power Dissipation ($T_c=25^\circ\text{C}$)	35	W
	Power Dissipation – Derate above 25°C	0.28	W/ $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	62	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance Junction to Case	---	3.6	$^\circ\text{C/W}$

RCQ3632

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Static State Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	30	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	---	0.04	---	$\text{V}/^\circ\text{C}$
I_{DS}	Drain-Source Leakage Current	$V_{\text{DS}}=30\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=24\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=125^\circ\text{C}$	---	---	10	μA
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 10	μA
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance ³	$V_{\text{GS}}=10\text{V}$, $I_D=16\text{A}$	---	8	9.0	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}$, $I_D=8\text{A}$	---	9	14	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_D=250\mu\text{A}$	1.2	1.6	2.5	V
$\Delta V_{\text{GS(th)}}$	$V_{\text{GS(th)}}$ Temperature Coefficient		---	-4	---	$\text{mV}/^\circ\text{C}$
g_{fs}	Forward Transconductance	$V_{\text{DS}}=10\text{V}$, $I_D=8\text{A}$	---	9.5	---	S

Dynamic Characteristics

Q_g	Total Gate Charge ^{3, 4}	$V_{\text{DS}}=15\text{V}$, $V_{\text{GS}}=4.5\text{V}$, $I_D=20\text{A}$	---	7.5	12	nC
Q_{gs}	Gate-Source Charge ^{3, 4}		---	1.3	2.6	
Q_{gd}	Gate-Drain Charge ^{3, 4}		---	4.5	8	
$T_{\text{d(on)}}$	Turn-On Delay Time ^{3, 4}	$V_{\text{DD}}=15\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_G=3.3\Omega$ $I_D=15\text{A}$	---	4.8	9	ns
T_r	Rise Time ^{3, 4}		---	12.5	24	
$T_{\text{d(off)}}$	Turn-Off Delay Time ^{3, 4}		---	27.6	52	
T_f	Fall Time ^{3, 4}		---	8.2	16	
C_{iss}	Input Capacitance	$V_{\text{DS}}=25\text{V}$, $V_{\text{GS}}=0\text{V}$, $F=1\text{MHz}$	---	680	1000	pF
C_{oss}	Output Capacitance		---	150	220	
C_{rss}	Reverse Transfer Capacitance		---	70	105	
R_g	Gate resistance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=0\text{V}$, $F=1\text{MHz}$	---	2.7	5.4	Ω

Guaranteed Avalanche Energy

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
EAS	Single Pulse Avalanche Energy	$V_{\text{DD}}=25\text{V}$, $L=0.1\text{mH}$, $I_{\text{AS}}=15\text{A}$	12	---	---	mJ

Drain-Source Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current	$V_G=V_D=0\text{V}$, Force Current	---	---	38	A
I_{SM}	Pulsed Source Current ³		---	---	192	A
V_{SD}	Diode Forward Voltage ³	$s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1	V

Note

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{\text{DD}}=25\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=0.1\text{mH}$, $I_{\text{AS}}=30\text{A}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$.
3. The data tested by pulsed, pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.

30V N-Channel MOSFETs

RCQ3632

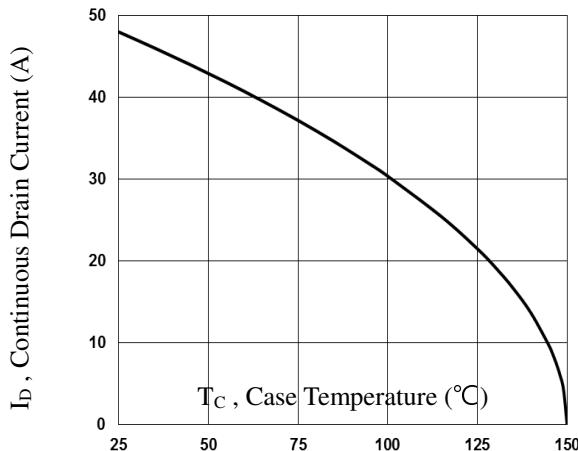


Fig.1 Continuous Drain Current vs. Tc

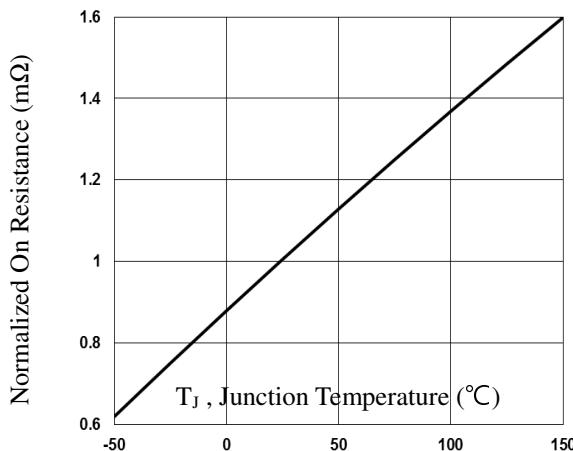


Fig.2 Normalized RDSON vs. Tj

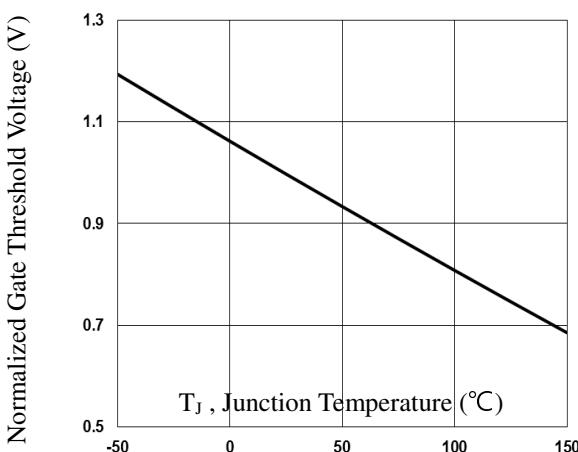


Fig.3 Normalized V_{th} vs. T_j

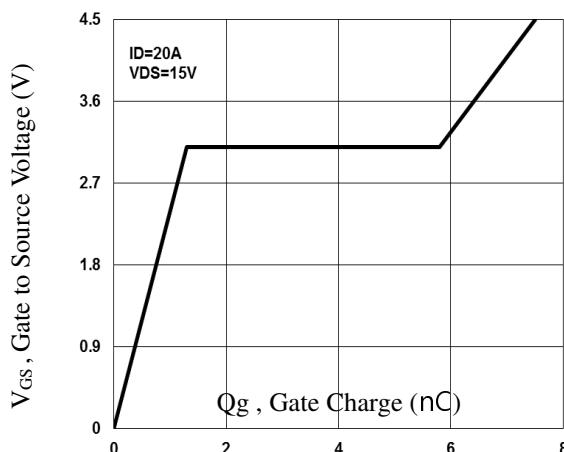


Fig.4 Gate Charge Waveform

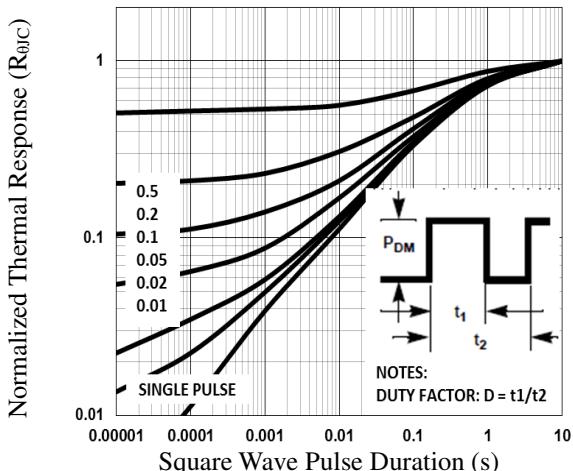


Fig.5 Normalized Transient Impedance

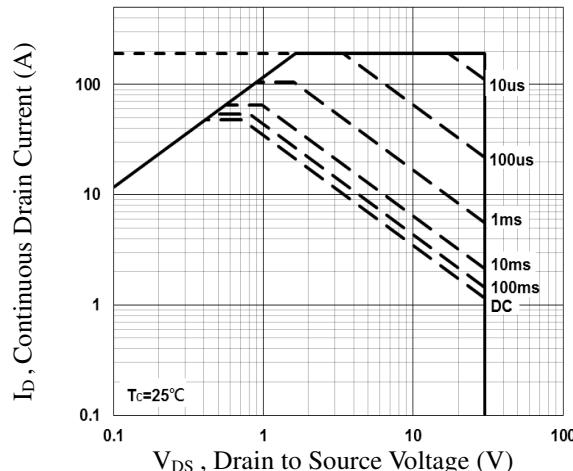


Fig.6 Maximum Safe Operation Area

30V N-Channel MOSFETS

RCQ3632

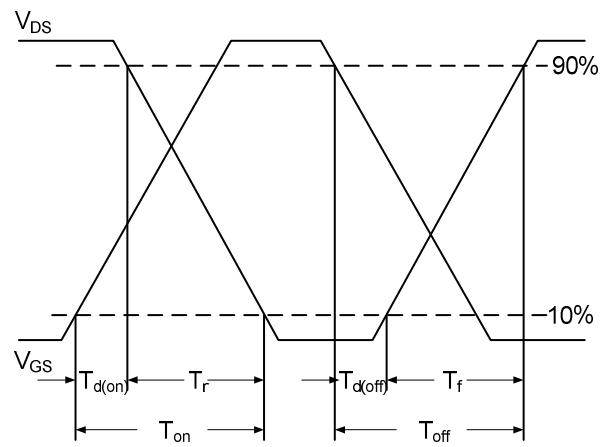


Fig.7 Switching Time Waveform


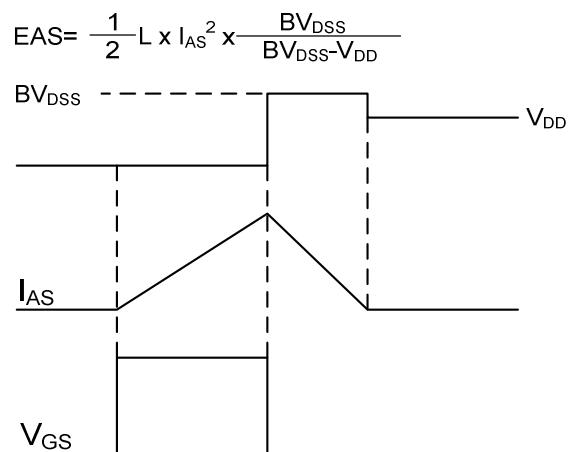


Fig.8 EAS Waveform

30V N-Channel MOSFETS

RCQ3632

PPAK3x3 PACKAGE INFORMATION

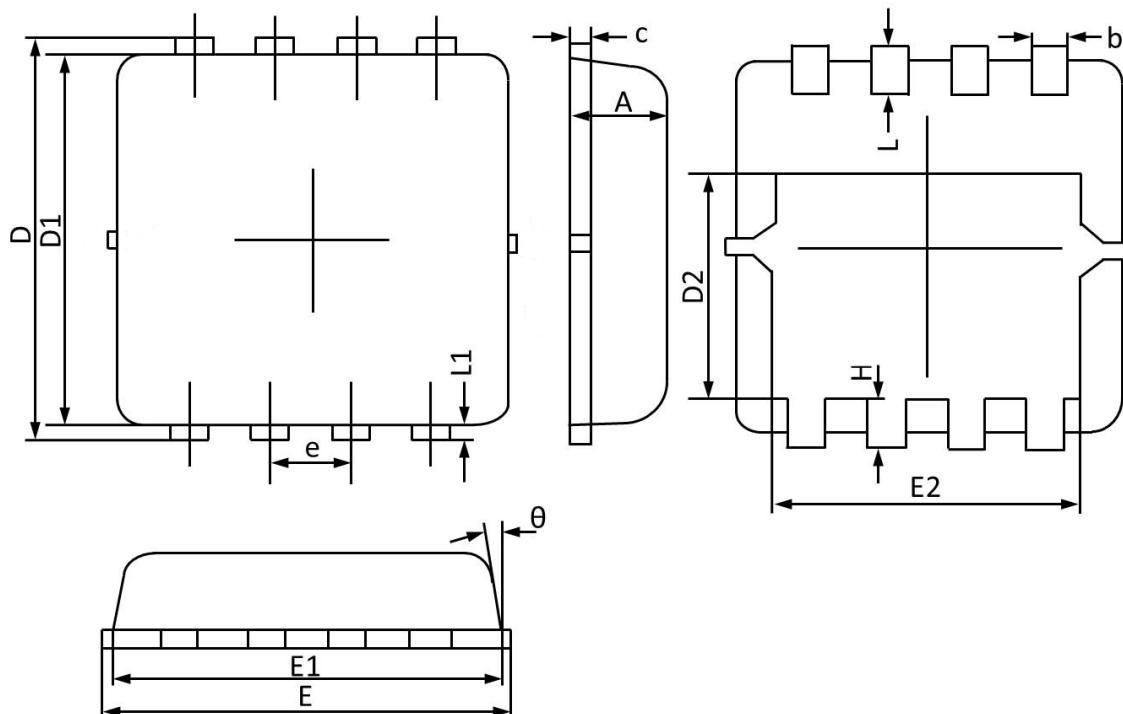

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	0.900	0.700	0.035	0.028
b	0.350	0.240	0.014	0.009
c	0.250	0.100	0.010	0.004
D	3.450	3.050	0.136	0.120
D1	3.200	2.900	0.126	0.114
D2	1.850	1.350	0.073	0.053
E	3.400	3.000	0.134	0.118
E1	3.250	2.900	0.128	0.114
E2	2.600	2.350	0.102	0.093
e	0.65BSC		0.026BSC	
H	0.500	0.300	0.020	0.012
L	0.500	0.300	0.020	0.012
L1	0.200	0.070	0.008	0.003
θ	12°	0°	12°	0°