

客户 (Customer) : _____

承认书

Approval Sheet

谨致执事者：兹提供敝公司之有关详细规格及图面数据, 敬请给予办理试认定手续。
同时敬请送返一份附有贵公司签认之测试认定后之样品承认书。

We are pleased in sending you herewith on specification and drawings for your approval.
Please return to us one copy "Approval sheet" with your approved signature.

型号 (Model No.) : A-SC633R6AC-J01-2T

发文日期 (Issue Date) : 2018/11/14 承认日期 (Approved Date) : _____

Checking signature of Amicc

Designer	Checker	Approver
ZhangPeng	Tommy	Solarliu

Approval signature of customer

Designer	Checker	Approver

江苏欧密格光电科技股份有限公司

Jiangsu Amicc Opto-Electronics Technology Co.,Ltd.

地址: 江苏省常州市武进区武南中路 98 号


Add: 98.Wu Nan Road, Wujin, Changzhou city, Jiangsu Province

TEL:0086-519-89806973

FAX:0086-519-86523668

Top view LED Type ■ PLCC Package

A-SC633R6AC-J01-2T

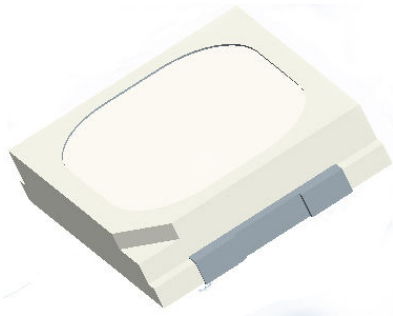

Features

- Top view LED
- High luminous flux output
- Wide viewing angle
- Pb-free
- RoHS compliant
- JEDEC MSL 3

Description

The Amicc 633 package has high efficacy, high power consumption, wide viewing angle and a compact form factor. These features make this package an ideal LED for all lighting applications.

Applications

- General lighting
- Decorative and Entertainment Lighting
- Indicators
- Illumination
- Switch lights
- Flash lights

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
AlGaInP	Red	Water Clear

Absolute Maximum Ratings ($T_{\text{Soldering}}=25^{\circ}\text{C}$)

Parameter	Symbol	Rating	Unit
Forward Current	I_F	200	mA
Peak Forward Current($T=1\text{ms}$, $t_p=0.1\text{ms}$)	I_{FP}	140	mA
Power Dissipation	P_d	550	mW
Operating Temperature	T_{opr}	-40 ~ +85	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-40 ~ +100	$^{\circ}\text{C}$
Junction Temperature	T_j	115	$^{\circ}\text{C}$
Soldering Temperature	T_{sol}	Reflow Soldering : 260 $^{\circ}\text{C}$ for 10 sec. Hand Soldering : 350 $^{\circ}\text{C}$ for 3 sec.	

Note:

The products are sensitive to static electricity and must be carefully taken when handling products.

Electro-Optical Characteristics ($T_{\text{Soldering}}=25^{\circ}\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Flux	Φ	18	22	28	lm	$I_F=150\text{mA}$
Forward Voltage	V_F	1.75	--	2.55	V	$I_F=150\text{mA}$
Peak Wavelength	λ_p	-----	620.0	-----	nm	$I_F=150\text{mA}$
Dominant Wavelength	Λ_d	617.5	---	629.5	nm	$I_F=150\text{mA}$
Viewing Angle	$2\theta_{1/2}$	-----	120	-----	deg	$I_F=150\text{mA}$
Reverse Current	I_R	-----	-----	10	μA	$V_R = 5\text{V}$

Notes:

1. Tolerance of Luminous Intensity: $\pm 10\%$.
2. Tolerance of Forward Voltage : $\pm 0.1\text{V}$.

Bin Range of Luminous Flux

Bin Code	Min.	Max.	Unit	Condition
F34	18	20	lm	I _F =150mA
F35	20	24		
F36	24	28		

Note:
Tolerance of Luminous Flux: $\pm 10\%$.

Bin Range of Forward Voltage

Bin Code	Min.	Max.	Unit	Condition
0	1.75	1.95	V	I _F =150mA
1	1.95	2.15		
2	2.15	2.35		
3	2.35	2.55		


Note:
Tolerance of Forward Voltage: $\pm 0.1V$.

Bin Range of Dominant Wavelength

Bin Code	Min.	Max.	Unit	Condition
R4	617.5	621.5	nm	I _F =150mA
R5	621.5	625.5		
R6	625.5	629.5		

Note:
Tolerance of Dominant Wavelength: $\pm 1nm$.

Spectrum Distribution

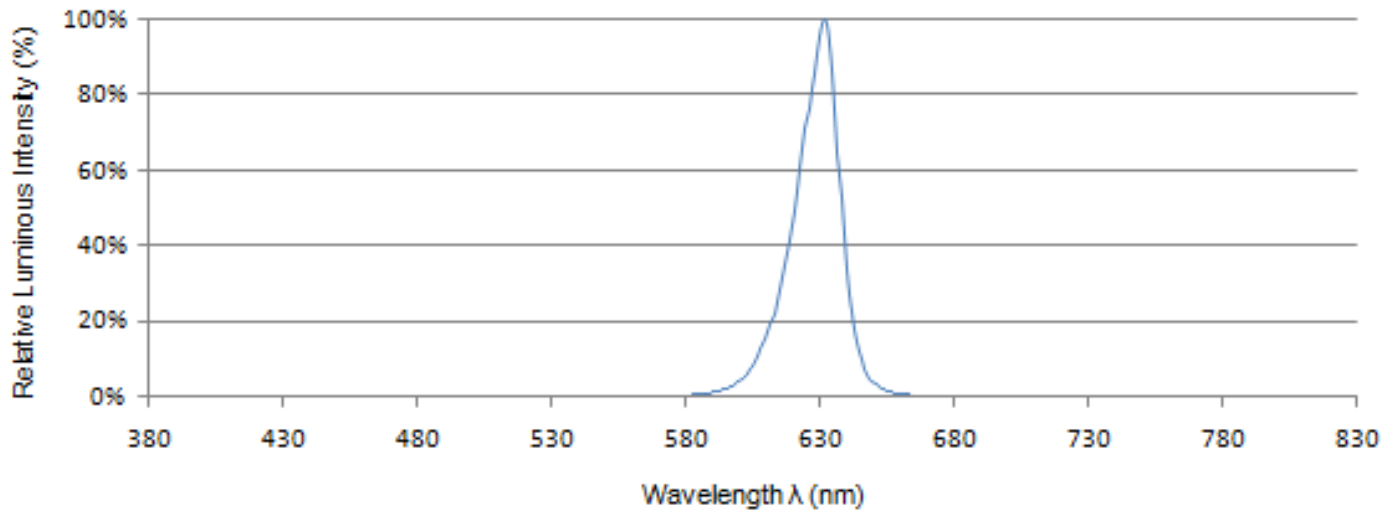

Typical Electro-Optical Characteristics Curves

Fig.1-Forward Voltage Shift vs. Junction Temperature


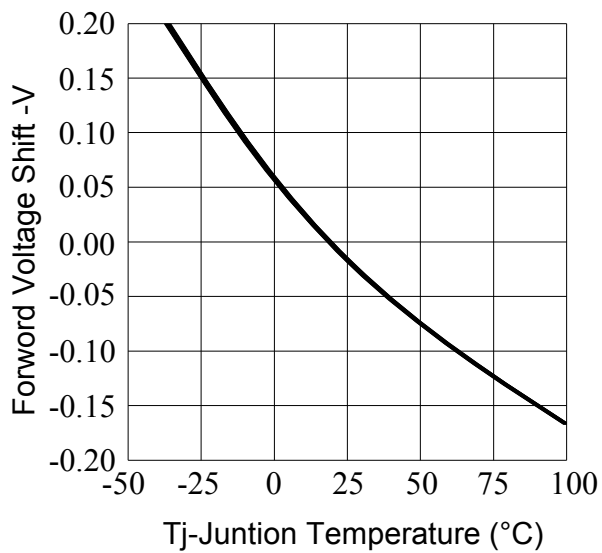


Fig.2-Relative Luminous Flux vs. Forward Current

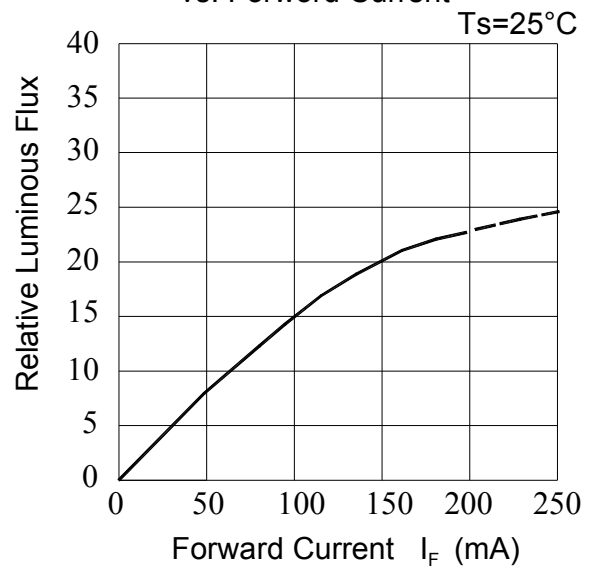

Typical Electro-Optical Characteristics Curves

Fig.3-Relative Luminous Flux
vs.Junction Temperature

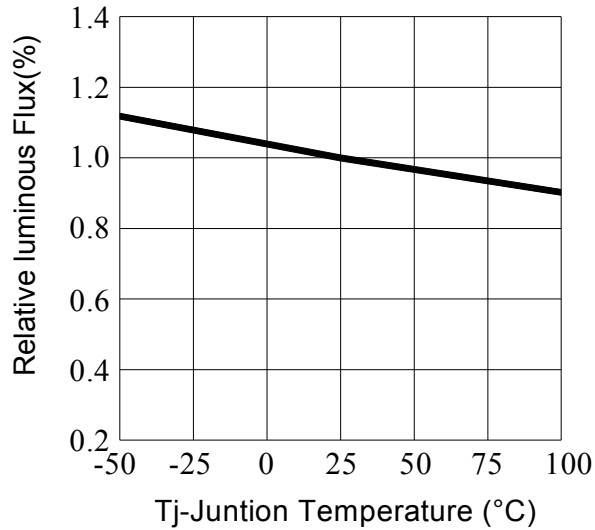


Fig.4-Forward Current vs.
Forward Voltage T_a=25°C

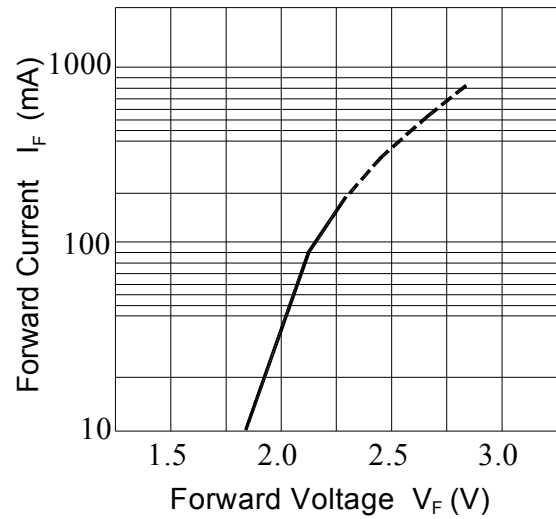


Fig.5-Max.Driving Forward Current
vs.Soldering Temperature






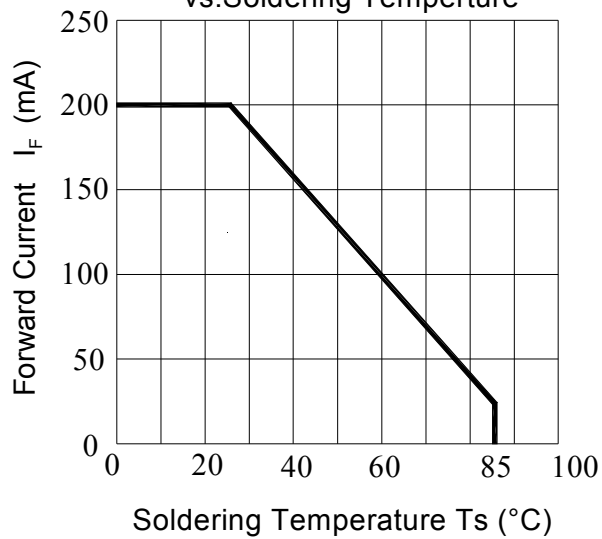



Fig.6-Radiation Diagram T_a=25°C
0° 10° 20°

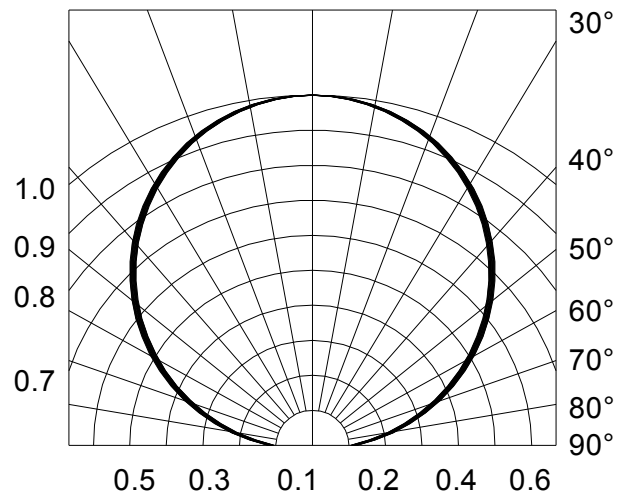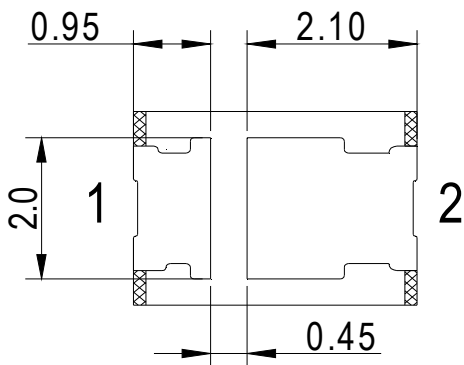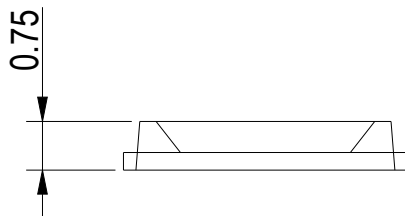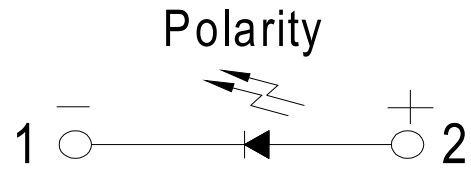

Package Dimension

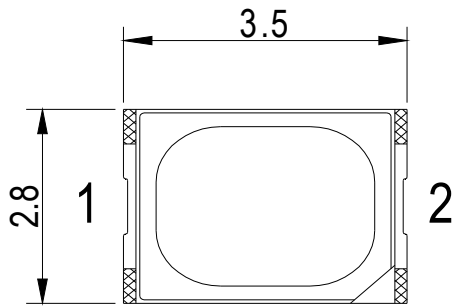


Recommended solder pad

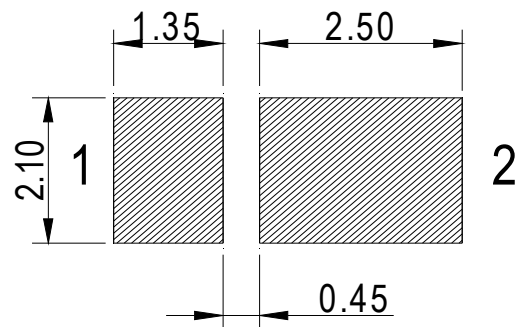

Note:
Tolerance unless mentioned is $\pm 0.1\text{mm}$, Unit = mm.


Moisture Resistant Packing Materials

Label Explanation

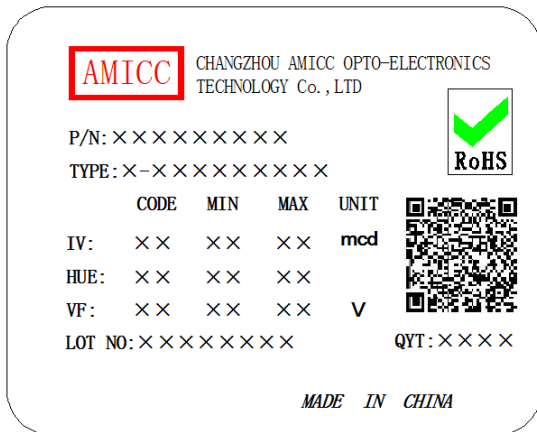


- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Flux Rank
- HUE: Dominant Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

Reel Dimensions

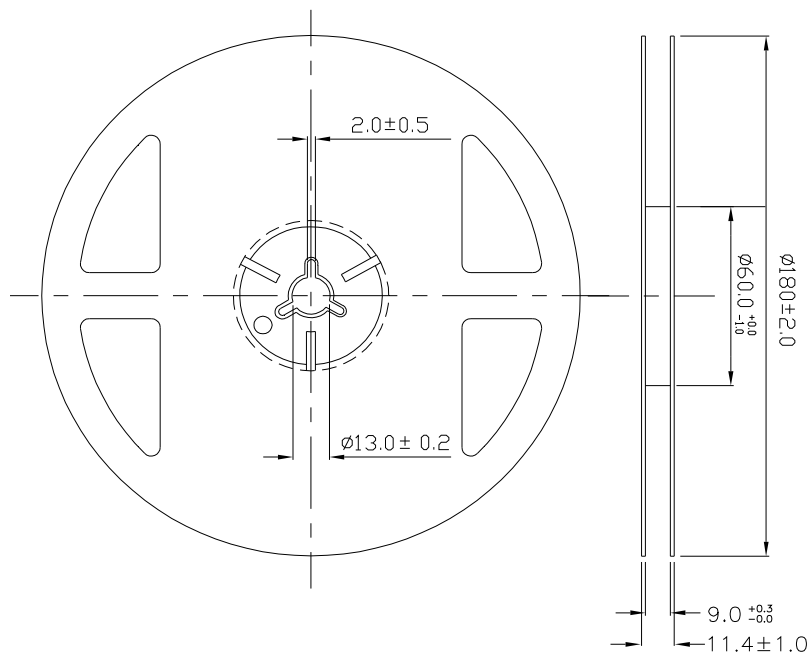

Note:
Tolerances unless mentioned $\pm 0.1\text{mm}$. Unit = mm.

Progressive direction

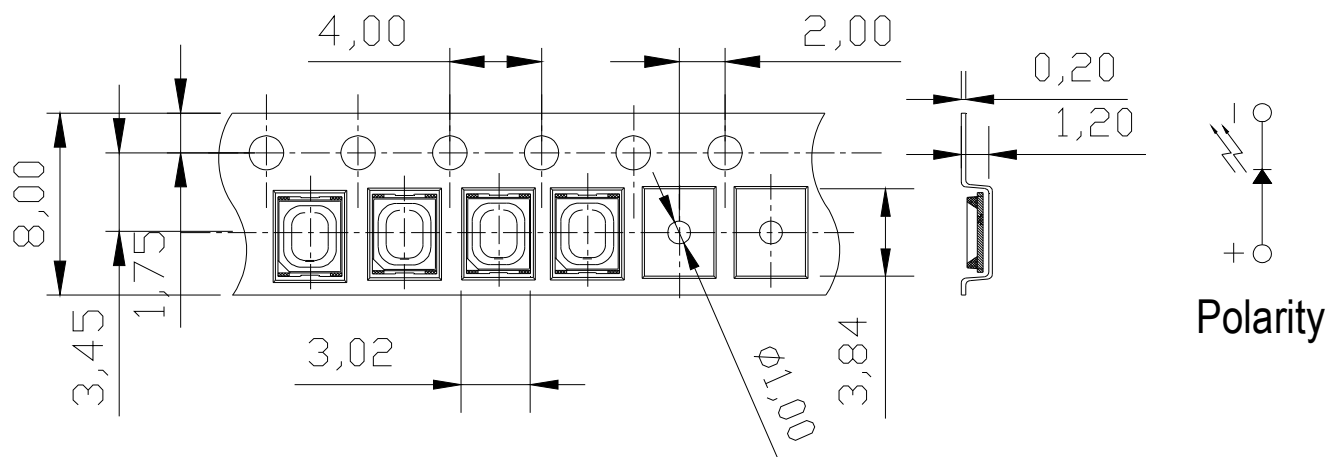

1.Tolerance unless mentioned is $\pm 0.1\text{mm}$,Unit = mm.
2.Minimum packing amount is 1000pcs per reel.

Diagram illustrating the packaging process for a film reel:

- Label**: Points to the label on the film reel and the label on the aluminum moisture-proof bag.
- Desiccant**: Points to the desiccant packet inside the aluminum moisture-proof bag.
- Aluminum moisture-proof bag**: Points to the bag used for packaging the film reel.

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C/10sec.	6 Min.	22 PCS.	0/1
2	Thermal Shock	H : +100°C 5min ∩ 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
3	Temperature Cycle	H : +100°C 15min ∩ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
4	High Temperature/Humidity Reverse Bias	Ta=85°C,85%RH	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Ta=-40°C	1000 Hrs.	22 PCS.	0/1
6	High Temperature Storage	Ta=100°C	1000 Hrs.	22 PCS.	0/1
7	DC Operation Life	Ta=25°C, I _F = 150 mA	1000 Hrs.	22 PCS.	0/1

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.


2.3 After opening the package: The LED's floor life is 168 Hrs under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60±5°C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

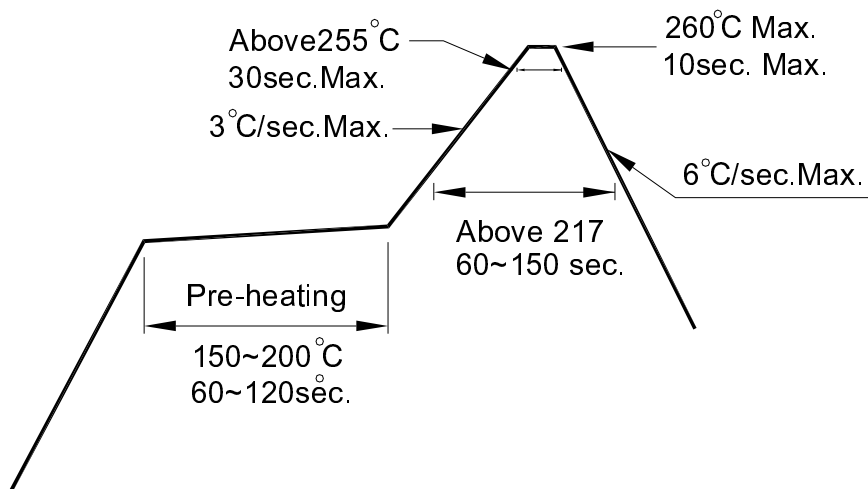

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.