
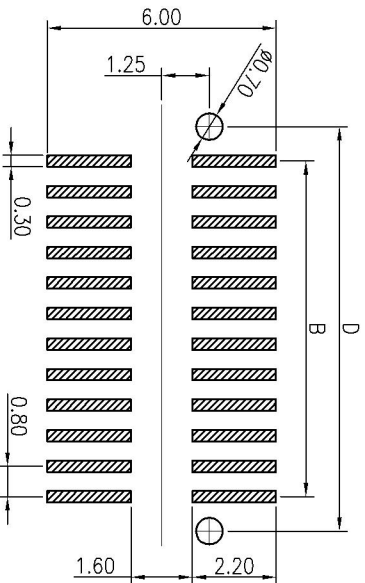
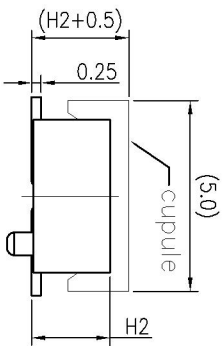



(MATING HEIGHT)

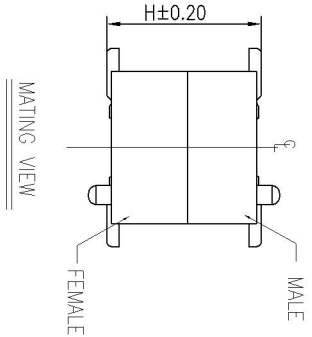

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

NOTES:

- 1.HUOSINGIT: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BRICE
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH/VERALL 50~100μ" NICKEL UNDER PLATED.
- 3.CODING INFORMATION: XDBF-08**--2*NP

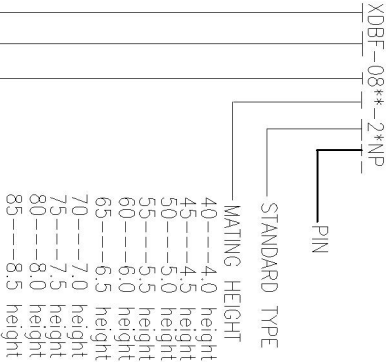

BOARD TO BOARD FEMALE WITH CUPULE TYPE
LANXIN CONN BTB CONNECTOR SERIES

MATING HEIGHT	MALE H1	FEMALE H2
4.0	1.85	2.05
4.5	0.95	1.45
5.0	1.45	1.95
5.5	1.95	2.45
6.0	2.45	2.95
6.5	2.95	3.45
7.0	3.45	3.95
7.5	3.95	4.45
8.0	4.45	4.95
8.5	4.95	5.45

PIN	Dimensions			PIN	Dimensions		
	A	B	C		A	B	C
8(2*4)	5.0	2.4	3.65	4.2	3.4(2*17)	15.4	12.8
10(2*5)	5.8	3.2	4.45	5.0	3.6(2*18)	16.2	13.6
12(2*6)	6.6	4.0	5.25	5.8	3.8(2*19)	17.0	14.4
14(2*7)	7.4	4.8	6.05	6.6	4.0(2*20)	17.8	15.2
16(2*8)	8.2	5.6	6.85	7.4	4.2(2*21)	18.6	16.0
18(2*9)	9.0	6.4	7.65	8.2	4.4(2*22)	19.4	16.8
20(2*10)	9.8	7.2	8.45	9.0	4.6(2*23)	20.2	17.6
22(2*11)	10.6	8.0	9.25	9.8	4.8(2*24)	21.0	18.4
24(2*12)	11.4	8.8	10.05	10.6	5.0(2*25)	21.8	19.2
26(2*13)	12.2	9.6	10.85	11.4	5.2(2*26)	22.6	20.0
28(2*14)	13.0	10.4	11.65	12.2	5.4(2*27)	23.4	20.8
30(2*15)	13.8	11.2	12.45	13.0	5.6(2*28)	24.2	21.6
32(2*16)	14.6	12.0	13.25	13.8	5.8(2*29)	25.0	22.4
34(2*17)	15.4	12.8	14.05	14.6	6.0(2*30)	25.8	23.2

深圳市连欣科技有限公司

REV: A SIZE: A4 GENERAL TOLERANCE: UNLESS OTHERWISE SPECIFIED XDBF-08**--2*NP
UNIT: MM SCALE: 5:1
SHEET NO: XXXX TITLE: 0.8 BOARD TO BOARD
1 OF 1 ANG: 0°30' SMT V/T TYPE FEMALE

REV	REVISIONS	CHK	DATE	DRAWN BY:	CHECKED BY:	APPROVED BY: