

## STRADELLA-8-HV-SCL

Type II/III (long) beam for very wide pole to pole distances. Ideal for pedestrian paths and residential roads. EN13201 P-class. Variant with improved creepage distance for high voltage circuit design

### SPECIFICATION:

|                |                |
|----------------|----------------|
| Dimensions     | 49.5 x 49.5 mm |
| Height         | 5.4 mm         |
| Fastening      | pin, screw     |
| ROHS compliant | yes ⓘ          |




### MATERIALS:

| Component          | Type       | Material | Colour | Finish |
|--------------------|------------|----------|--------|--------|
| STRADELLA-8-HV-SCL | Multi-lens | PMMA     | clear  |        |

### ORDERING INFORMATION:

| Component   | Qty in box | MOQ | MPQ | Box weight (kg) |
|---|------------|-----|-----|-----------------|
| C15987_STRADELLA-8-HV-SCL<br>» Box size: 480 x 280 x 300 mm | 800        | 160 | 160 | 8.0             |

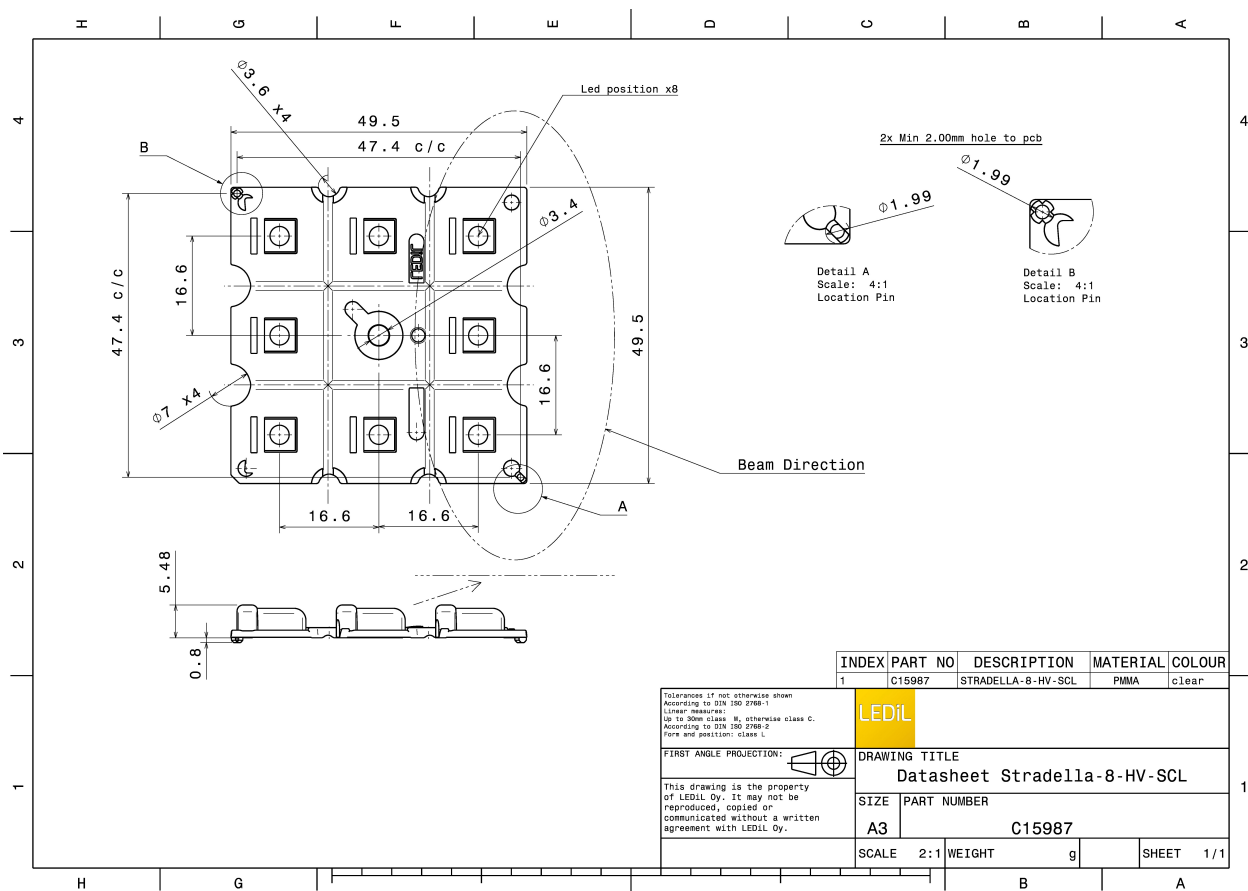


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)


#### OPTICAL RESULTS (MEASURED):





LED J Series 3030  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

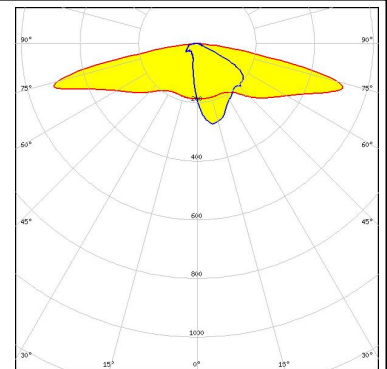


LED XD16  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

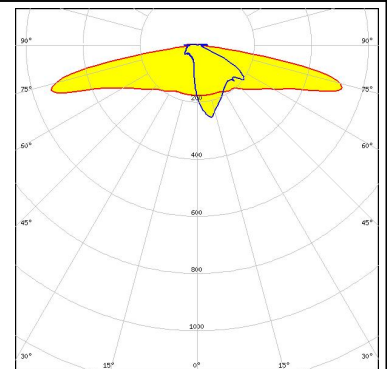

LED XT-E  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

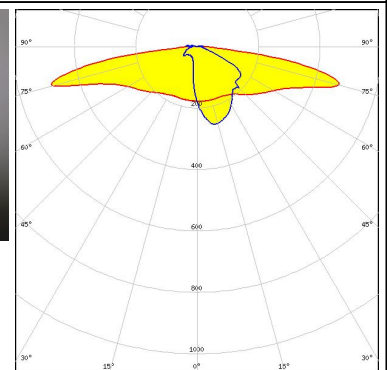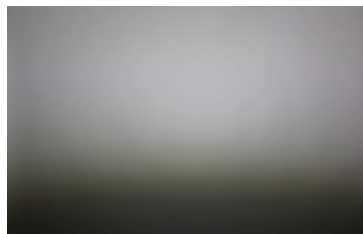

LED Fortimo FastFlex LED 4x8up PR G5  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

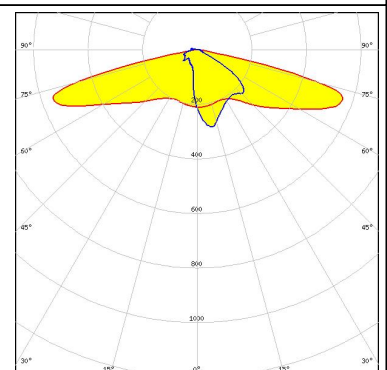


### OPTICAL RESULTS (MEASURED):




#### OPTICAL RESULTS (SIMULATED):



LED XP-G2 HE  
FWHM / FWTM Asymmetric  
Efficiency 89 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

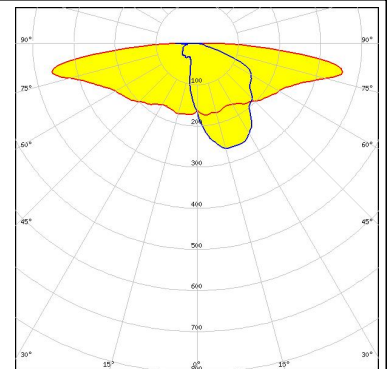


LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

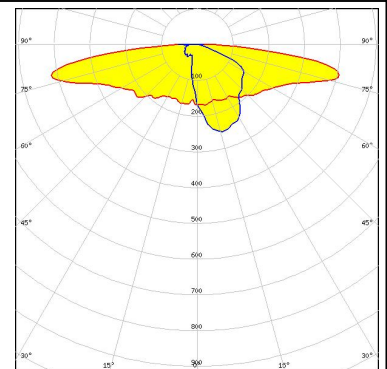


LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 76 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

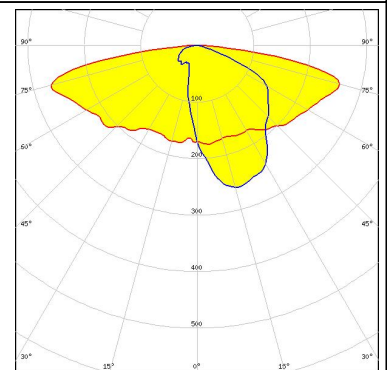


LED XQ-E HD  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

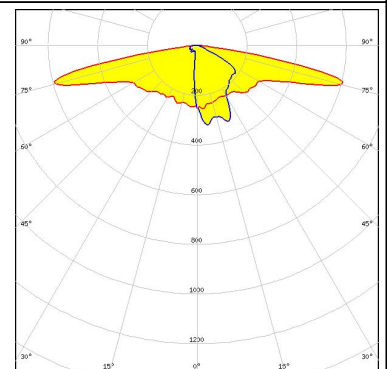


#### OPTICAL RESULTS (SIMULATED):



LED XQ-E HI  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

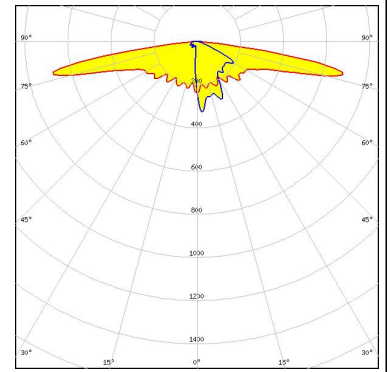


LED LUXEON 5050 Square LES  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

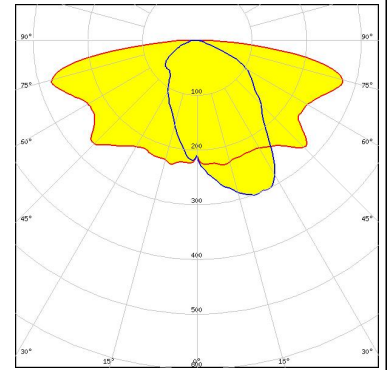


LED LUXEON C  
FWHM / FWTM Asymmetric  
Efficiency 67 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

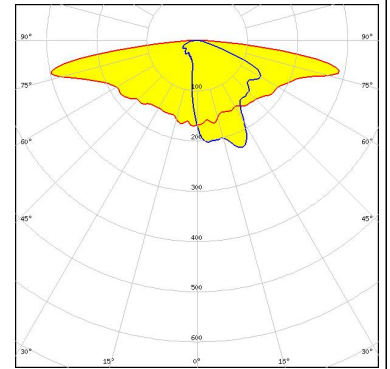

LED LUXEON CZ  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

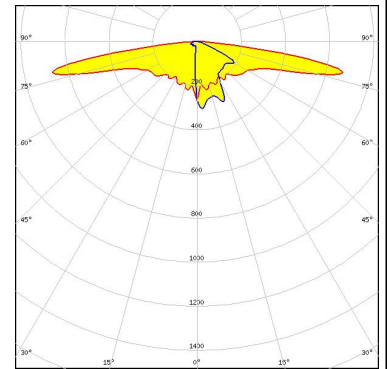


#### OPTICAL RESULTS (SIMULATED):



LED NVSW219F  
FWHM / FWTM Asymmetric  
Efficiency 73 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

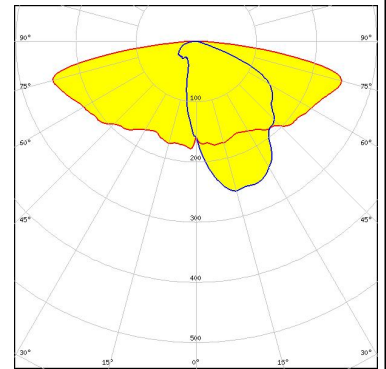


LED NVSxx19B/NVSxx19C  
FWHM / FWTM Asymmetric  
Efficiency 74 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


Protective plate, glass



LED NVSxx19B/NVSxx19C  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

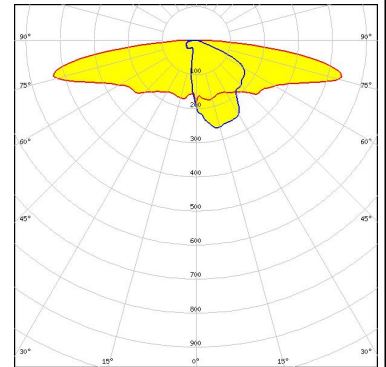

LED OSCONIQ C 2424  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

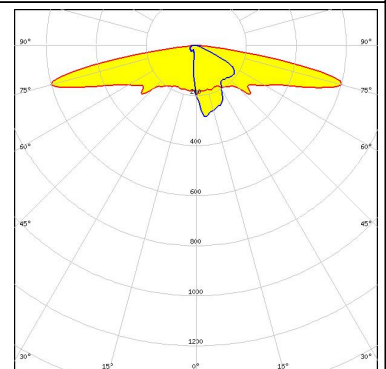


#### OPTICAL RESULTS (SIMULATED):

##### OSRAM

Opto Semiconductors

LED OSCONIQ C 2424  
FWHM / FWTM Asymmetric  
Efficiency 77 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


Protective plate, glass

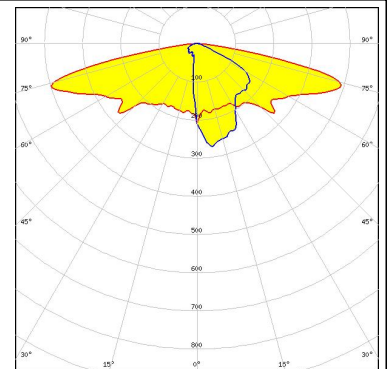

##### OSRAM

Opto Semiconductors

LED OSCONIQ C 3030  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

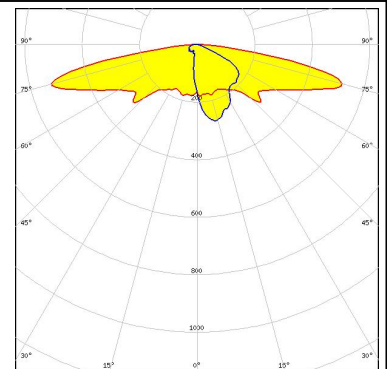


##### OSRAM

Opto Semiconductors

LED OSCONIQ C 3030  
FWHM / FWTM Asymmetric  
Efficiency 76 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


Protective plate, glass

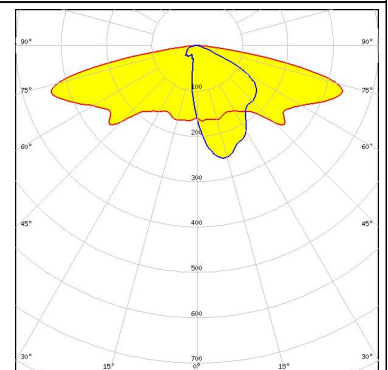

##### OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

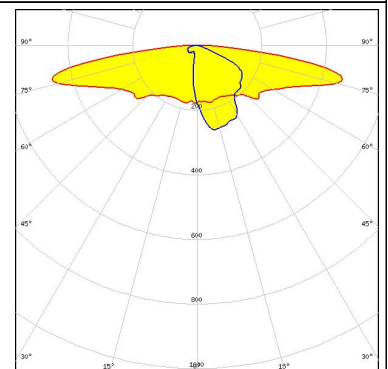




#### OPTICAL RESULTS (SIMULATED):

##### OSRAM

Opto Semiconductors

|                      |                            |
|----------------------|----------------------------|
| LED                  | OSLON Square CSSRM2/CSSRM3 |
| FWHM / FWTM          | Asymmetric                 |
| Efficiency           | 72 %                       |
| Peak intensity       | 0.4 cd/lm                  |
| LEDs/each optic      | 1                          |
| Light colour         | White                      |
| Required components: |                            |


Protective plate, glass

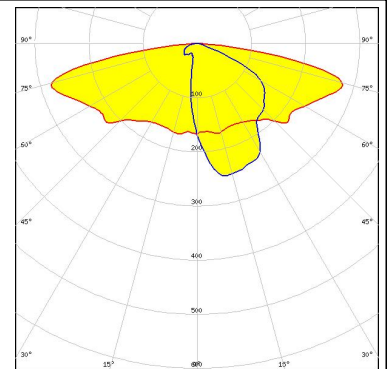

##### PHILIPS


|                      |                                  |
|----------------------|----------------------------------|
| LED                  | Fortimo FastFlex LED 4x8up PR G5 |
| FWHM / FWTM          | Asymmetric                       |
| Efficiency           | 81 %                             |
| Peak intensity       | 0.5 cd/lm                        |
| LEDs/each optic      | 1                                |
| Light colour         | White                            |
| Required components: |                                  |

Protective plate, glass

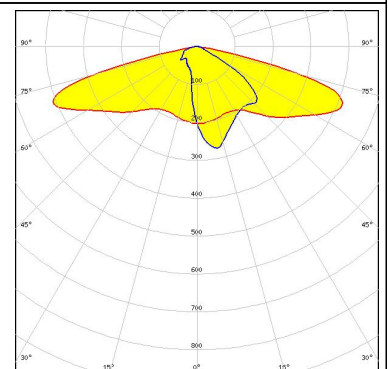


##### SAMSUNG

|                      |            |
|----------------------|------------|
| LED                  | LH181A     |
| FWHM / FWTM          | Asymmetric |
| Efficiency           | 93 %       |
| Peak intensity       | 0.6 cd/lm  |
| LEDs/each optic      | 1          |
| Light colour         | White      |
| Required components: |            |

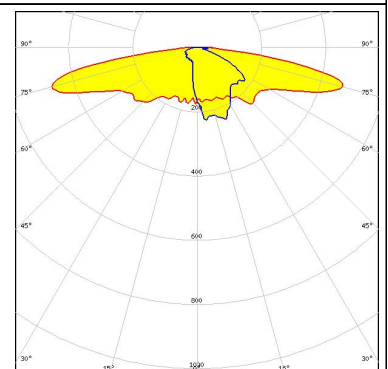

##### SAMSUNG

|                      |            |
|----------------------|------------|
| LED                  | LH181B     |
| FWHM / FWTM          | Asymmetric |
| Efficiency           | 94 %       |
| Peak intensity       | 0.7 cd/lm  |
| LEDs/each optic      | 1          |
| Light colour         | White      |
| Required components: |            |

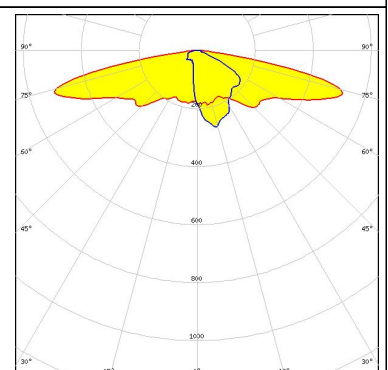


#### OPTICAL RESULTS (SIMULATED):

#### SAMSUNG

LED LH351B  
FWHM / FWTM Asymmetric  
Efficiency 75 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


Protective plate, glass

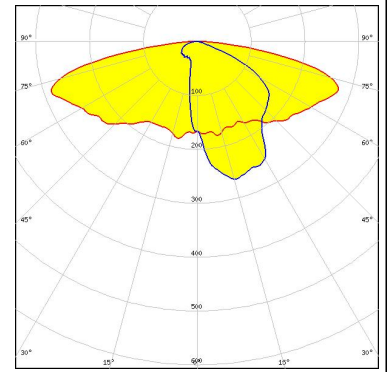

#### SEOUL SEMICONDUCTOR


LED Z5M4  
FWHM / FWTM Asymmetric  
Efficiency 76 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

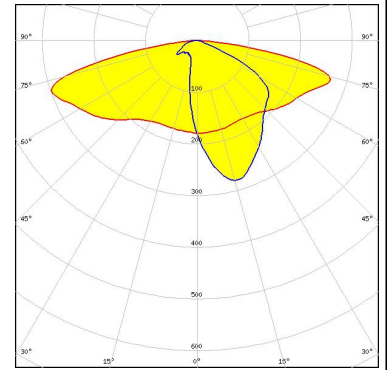


#### SEOUL SEMICONDUCTOR

LED Z8Y19  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

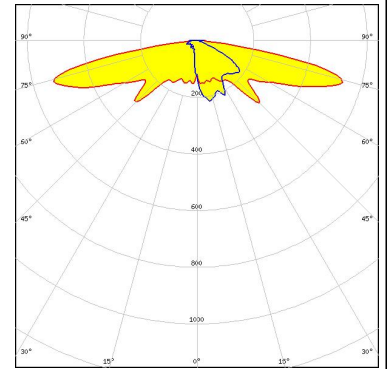

#### SEOUL SEMICONDUCTOR

LED Z8Y22  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

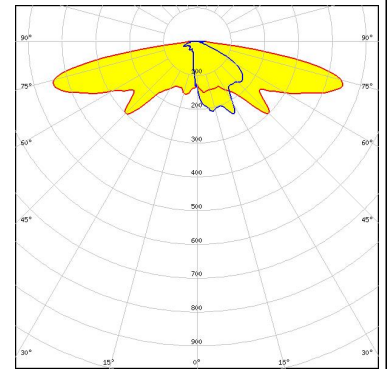

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)