



DEUTSCH | STRIKE

TE Internal #: SRK06-MDB-32A-001

Housing for Female Terminals, Wire-to-Wire, 32 Position, .134 in / .228 in / .118 in [6.1 mm / 3 mm / 3.4 mm] Centerline, Sealable, Black, STRIKE

[View on TE.com >](#)

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH Strike Housings



Connector System: **Wire-to-Wire**

Number of Positions: **32**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **3 mm, 3.4 mm, 5.8 mm, 6.1 mm [.118 in, .134 in, .228 in, .24 in]**

Sealable: **Yes**

[All DEUTSCH Strike Housings \(20\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing

Configuration Features

Number of Positions	32
Number of Rows	4

Electrical Characteristics

Operating Voltage	48 VAC
Nominal Voltage Architecture	12 V, 24 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black



Connector & Keying Code	B
-------------------------	---

Contact Features

Contact Size	Size 16, Size 20
--------------	------------------

Contact Type	Socket
--------------	--------

Mating Pin Diameter	1.02 mm, 1.59 mm [.04 in] [.063 in]
---------------------	-------------------------------------

Contact Current Rating (Max)	7.5 A, 13 A
------------------------------	-------------

Mechanical Attachment

Terminal Position Assurance	Yes
-----------------------------	-----

Strain Relief	With
---------------	------

Mating Alignment Type	Keyed
-----------------------	-------

Mating Alignment	With
------------------	------

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Housing Material	PBT
------------------	-----

Centerline (Pitch)	3 mm, 3.4 mm, 5.8 mm, 6.1 mm [.118 in] [.134 in] [.228 in] [.24 in]
--------------------	---

Dimensions

Connector Height	48.5 mm [1.909 in]
------------------	--------------------

Product Width	38.9 mm [1.532 in]
---------------	--------------------

Product Length	81 mm [3.189 in]
----------------	------------------

Row-to-Row Spacing	10.85 mm, 11.35 mm, 3.5 mm [.138 in] [.427 in] [.447 in]
--------------------	--

Compatible Insulation Diameter Range	1.55 – 2.41 mm, 1.55 – 3.05 mm [.061 – .095 in] [.061 – .12 in]
--------------------------------------	---

Usage Conditions

Operating Temperature (Max)	125 °C [257 °F]
-----------------------------	-----------------

Operating Temperature Range	-55 – 125 °C [-67 – 257 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Degree of Protection	IP68, IP6K9K
----------------------	--------------

Compatible With Agency/Standards Products	SAE J2030
---	-----------

UL Flammability Rating	Not tested
------------------------	------------



Packaging Features

Packaging Quantity	144
Packaging Method	Box

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance


[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

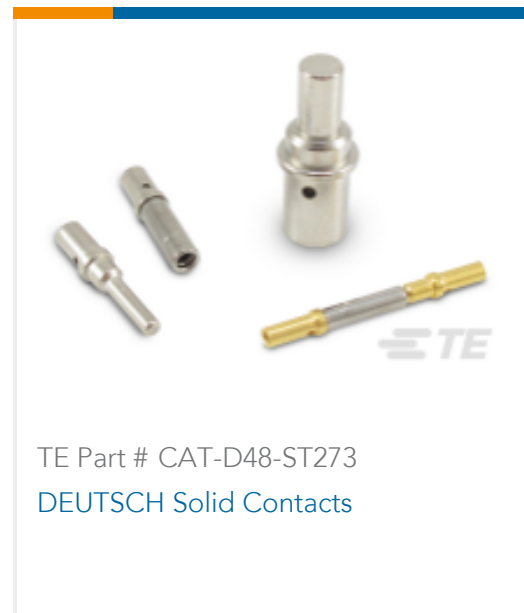

Also in the Series | **STRIKE**



Automotive Housings(20)

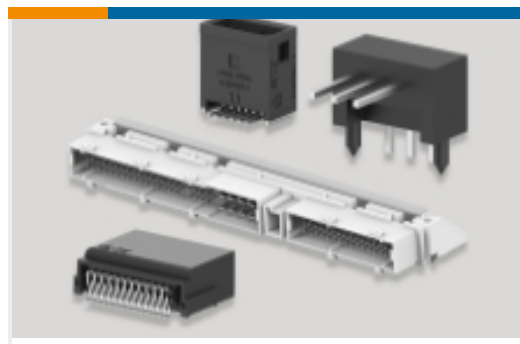

PCB Headers & Receptacles(9)

Customers Also Bought



TE Part #0413-003-1605
SEALING PLUG, SIZE 16, BLU



TE Part #DT06-08SA-CE13
DEUTSCH DT Plug Connectors



TE Part #DTP04-2P-EE01
REC, 2P, BLK, N, XCAP



TE Part #SRK-BS-MD-90-001
BKSHL, MED, BLK, RA, NW 17/22



TE Part #SRK-BS-MD-ST-001
BKSHL, MED, BLK, ST, NW 17/22



TE Part #SRK06-MDC-32A-001
DEUTSCH Strike Housings

Documents

Product Drawings

PLG, 32P, BLK, E, B

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_SRK06-MDB-32A-001_D.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_SRK06-MDB-32A-001_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_SRK06-MDB-32A-001_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



[Product Specifications](#)

[Application Specification](#)

English