

Features

- Fast switching speed
- High conductance


HF

Mechanical Data


- Case: SOT-23
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208




MMBD4148A



MMBD4148CA



MMBD4148CC



MMBD4148SE



SOT-23

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
MMBD4148A	SOT-23	3000 pcs / Tape & Reel	5H
MMBD4148CA	SOT-23	3000 pcs / Tape & Reel	D6
MMBD4148CC	SOT-23	3000 pcs / Tape & Reel	D5
MMBD4148SE	SOT-23	3000 pcs / Tape & Reel	D4

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
DC Blocking Voltage	V _R	100	V
Average Rectified Output Current	I _F	200	mA
Forward Continuous Current (Max.)	I _{FM}	600	mA
Peak Forward Surge Current, 1ms Single Half-sine-wave	I _{FSM}	2	A
Peak Forward Surge Current, 1s Single Half-sine-wave	I _{FSM}	1	A
Recurrent Peak Forward Current	I _{FRM}	700	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	350	mW
Thermal Resistance Junction-to-Air *1	$R_{\theta JA}$	342	°C/W
Thermal Resistance Junction-to-Case *1	$R_{\theta JC}$	208	°C/W
Thermal Resistance Junction-to-Lead *1	$R_{\theta JL}$	187	°C/W
Operating Junction Temperature Range	T_J	-55 ~ +150	°C
Storage Temperature Range	T_{STG}	55 ~ +150	°C

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 100\mu\text{A}$	100	-	-	V
		$I_R = 5\mu\text{A}$	75	-	-	V
Forward Voltage	V_F	$I_F = 10\text{mA}$	-	-	1	V
Maximum Peak Reverse Current	I_R	$V_R = 20\text{V}$	-	-	25	nA
		$V_R = 75\text{V}$	-	-	5	μA
Total Capacitance	C_J	$V_R = 0\text{V}, f = 1.0\text{MHz}$	-	-	4	pF
Reverse Recovery Time	t_{rr}	$I_F = 10\text{mA}, V_R = 6\text{V}$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$	-	-	4	ns

Note 1: The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

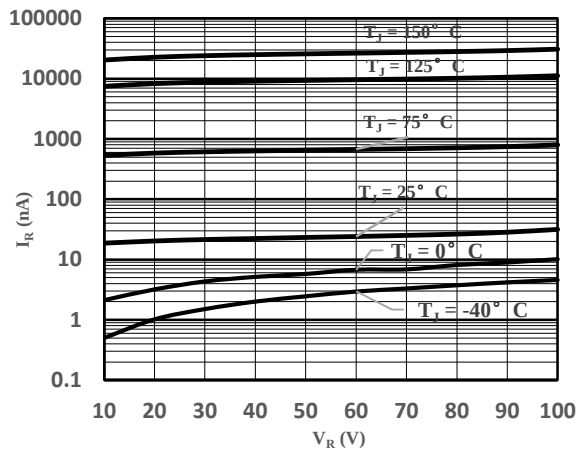


Fig 1 Typical Reverse Characteristic

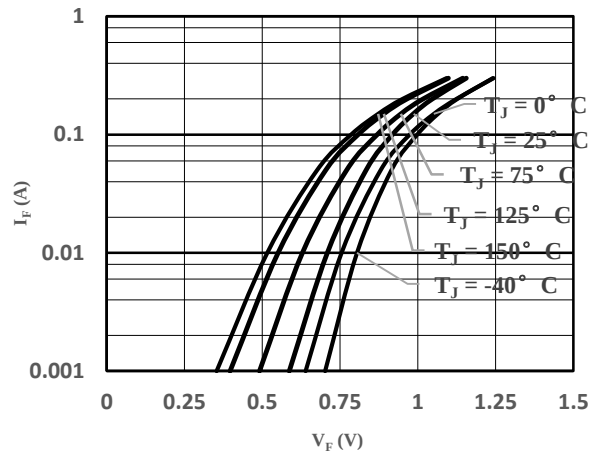


Fig 2 Typical Forward Characteristics

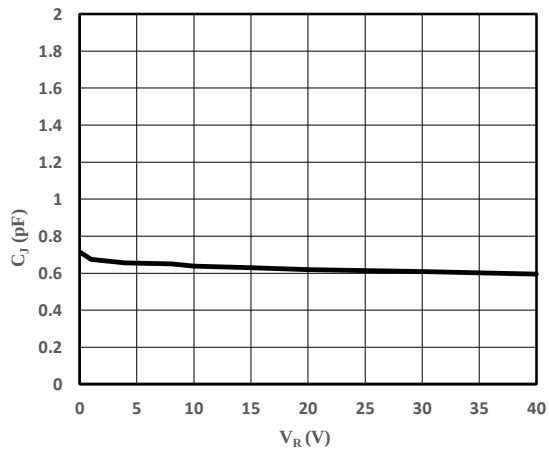


Fig 3 Capacitance vs. Reverse Voltage


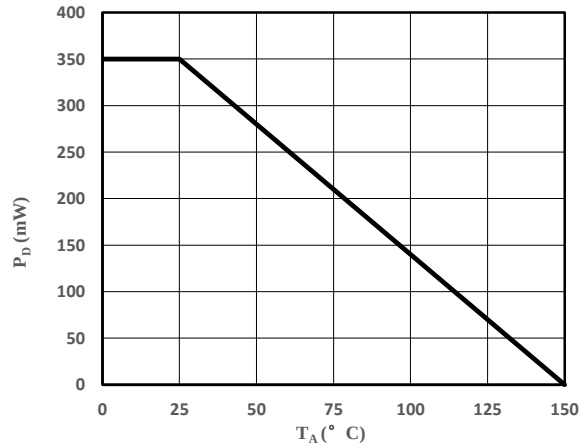


Fig 4 Power Derating Curve


Package Outline Dimensions (Unit: mm)

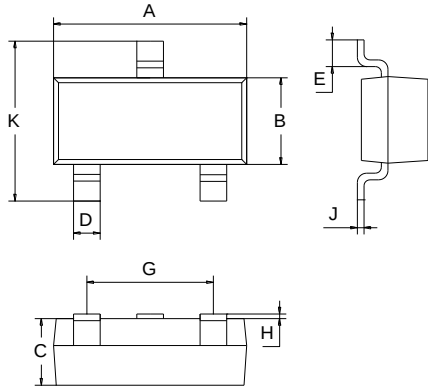

SOT-23		
Dimension	Min.	Max.
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

Package Outline Dimensions (Unit: mm)

SOT-23

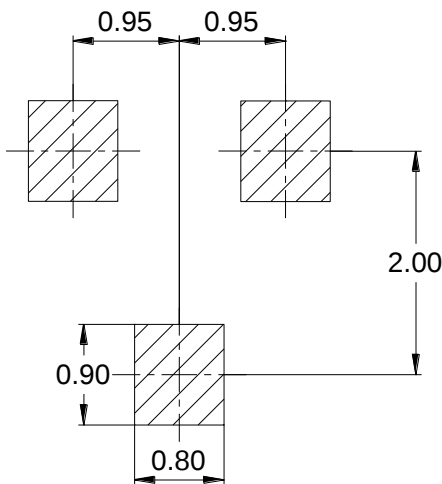

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.