REVISION	DESCRIPTION	DATE	DRAFTER
A0	首次发行	22.07.29	SQW

每批次需做成品首件确认

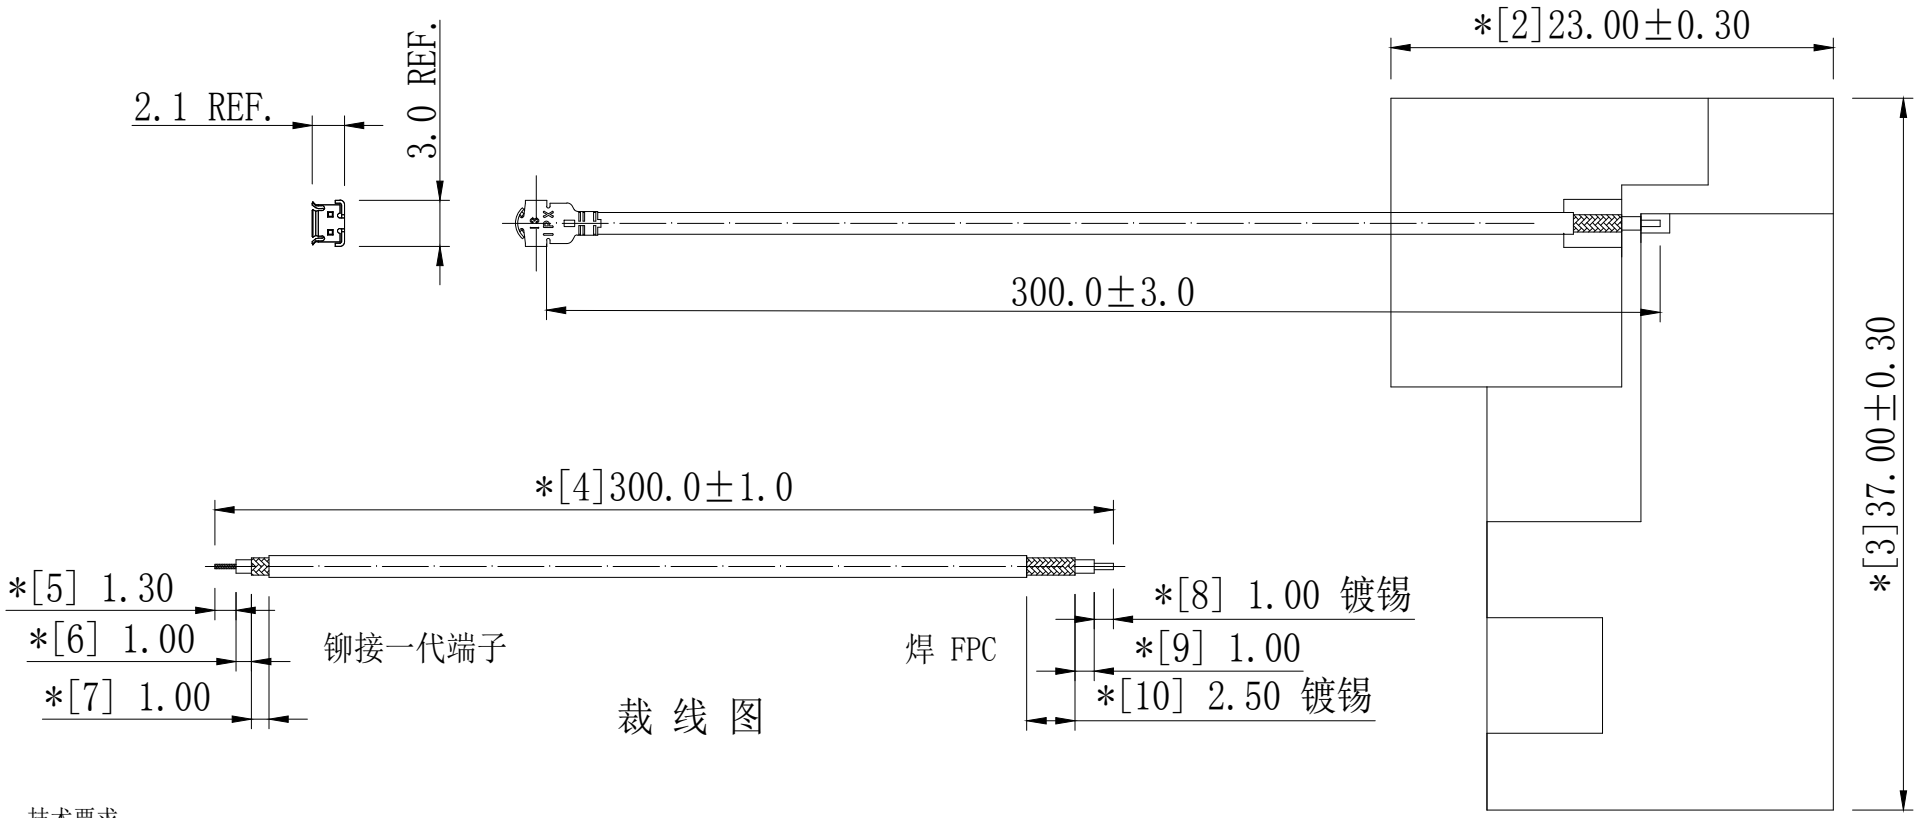

裁 线 图

技术要求：

1 方向要求：无。

2 电气特性：特性阻抗:50Ω；频率范围:2.4~2.5GHz&5.15~5.85GHz VSWR<2.0（装机测试）

检验方法：单测天线,使用网络分析仪100%比对Gold sample波形测试。

3 尺寸检验：[*]为FAI检测项目；*为重点检测项目；■为CPK管制项目。

4 外观检验：电缆裁切须平整，镀锡须光亮，导体不得有多余股数伸出与散乱；
FPC不得有划痕、刮伤、露铜等不良，焊接须胞满，不得有假焊、虚焊、毛刺；
电缆外被不得有破损、折皱及异色等不良。

检验方法：目视全检。

5 包装规范：50PCS/扎，2扎/袋。

6 环保要求：产品及其使用之物料皆需要符合RoHS要求。

No.	PART NUMBER	PART NAME & DESCRIPTION	Q'TY	REMARKS
3	2YF082	FPC.L*W=37*23mm	1	黑色
2	2LM10P113210	MHF-1 PLUG FOR OD1.13 CABLE	1	---
1	2C5M11312BK1	微细同轴电缆,OD1.13mm,黑色线	1	依裁线图裁线

GENERAL TOLERANCE:

LINEAR:	
X	±0.20
X.X	±0.15
X.XX	±0.05
X.XXX	±0.01
ANGLE:	
X°	±4.00°
X.X°	±3.00°
X.XX°	±2.00°
X.XXX°	±1.00°

HJ-Tech 东莞市皇捷通讯科技有限公司

FILE NAME: 产品图	TITLE: 射频电缆组件 WiFi内置天线,1.13黑色线,P1端焊接FPC, P2端打1代端子,裁线长L=300mm（RF2207053）				
ENG/DATE: SQW/21.12.30					
CHE/DATE: .	P/N: 3N0401BK-049				
APP/DATE: .	UNIT: mm		SCALE:	REVISION: A0	SHEET: 1/1

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □HF; □SONY SS-00259; □OTHERS
*NO USING ESTRICTED AND BANNED SUBSTANCE

H563