




Rectifier diode
Reverse Voltage50V-1000v
Forward current-1A

- Glass passivated chip
- High surge current capability
- Ideal for surface mounted applications
- Low power loss, high efficiency
- Plastic Case Material has UL Flammability



Package: SOD123FL
Terminals: Tin Plated leads, solderable per
Mil-STD-750 Method 2026
Polarity: As marked
Molding compound meets UL 94 V-0 flammability rating,
ROHS-compliant

Type Number	SYMBOL	A1	A2	A3	A4	A5	A6	A7	Umit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_L = 100^\circ\text{C}$	$I_{O(AV)}$	1.0							A
Peak Forward Surge Current 8.3ms Single half-sine-wave superimposed on rated load(JEDEC Method) on rated	IFSM	30.0							A
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, $T_j=25^\circ\text{C}$		60.0							A
Current squared time @ $1\text{ms} \leq t \leq 8.3\text{ms}$ $T_j=25^\circ\text{C}$, Rating of per diode	I^2t	3.7							A^2S
Maximum Forward Voltage at 1.0A DC	V_{FM}	1.1							V
Maximum Reverse Current $T_A = 25^\circ\text{C}$	IR	5.0							uA
at Rated DC Blocking Voltage $T_A = 100^\circ\text{C}$		100.0							
Typical Junction Capacitance	CJ	17.0							pF
Typical Thermal Resistance Between junction and	R_{QJa}	75.0							$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	—55to+150							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	—55to+150							$^\circ\text{C}$



FIG. 1 MAXIMUM AVERAGE FORWARD CURRENT DERATING

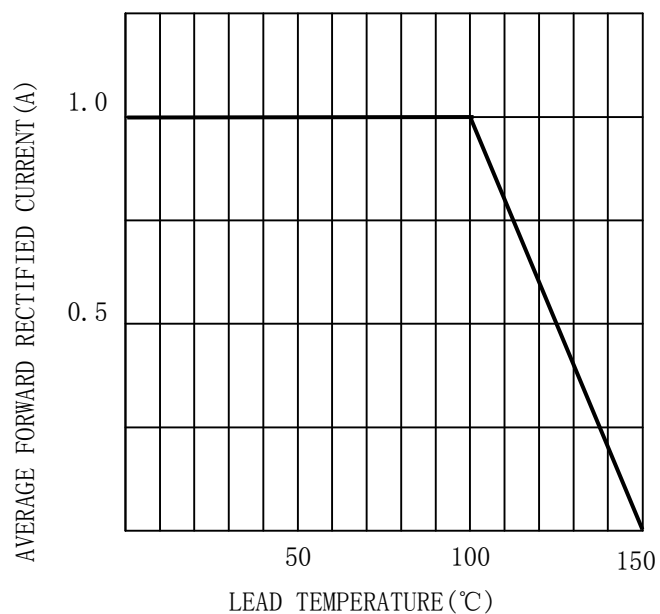


FIG. 2 TYPICAL FORWARD CHARACTERISTICS

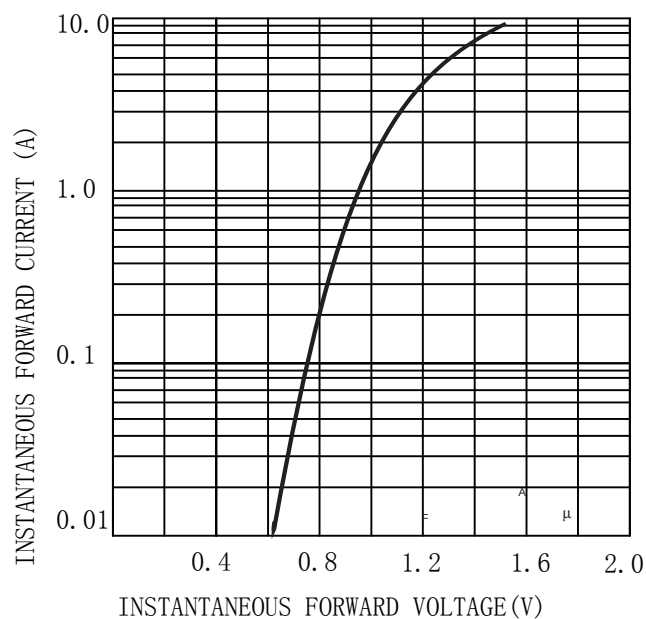


FIG. 3 MAXIMUM NON-REPEITIVE SURGE CURRENT


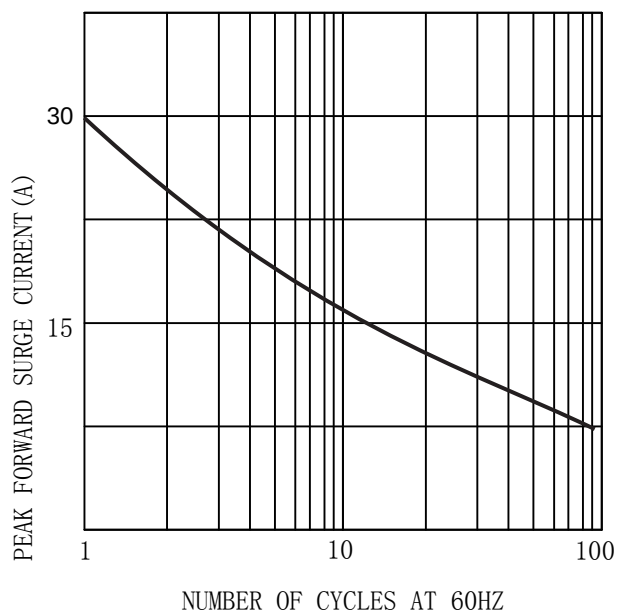


FIG. 4 TYPICAL REVERSE CHARACTERISTICS (per element)





MARKING INFORMATION

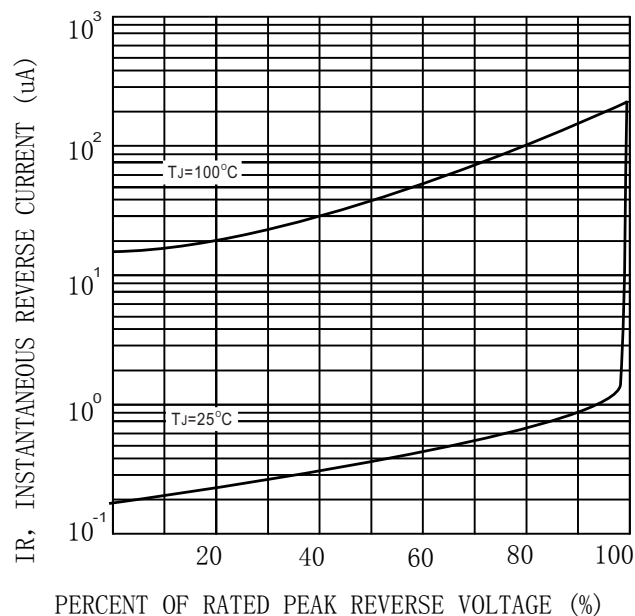

 = Logo


**** = Date Code Marking

A* = Marking Code


Print according to customer request

PACKING REQUIRMENTS

• Carrier tape packing

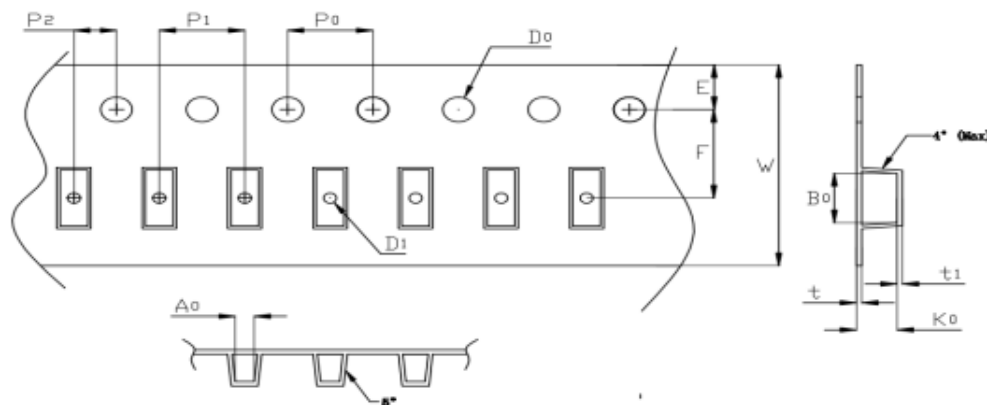

Specifications	Carrier tape type	Ao	Bo	Ko	Po	W	t	Explain
SOD-123FL	Anti-static	1.95 ± 0.10	3.95 ± 0.10	1.35 ± 0.10	4.00 ± 0.10	8.0 ± 0.10	0.23 ± 0.05	

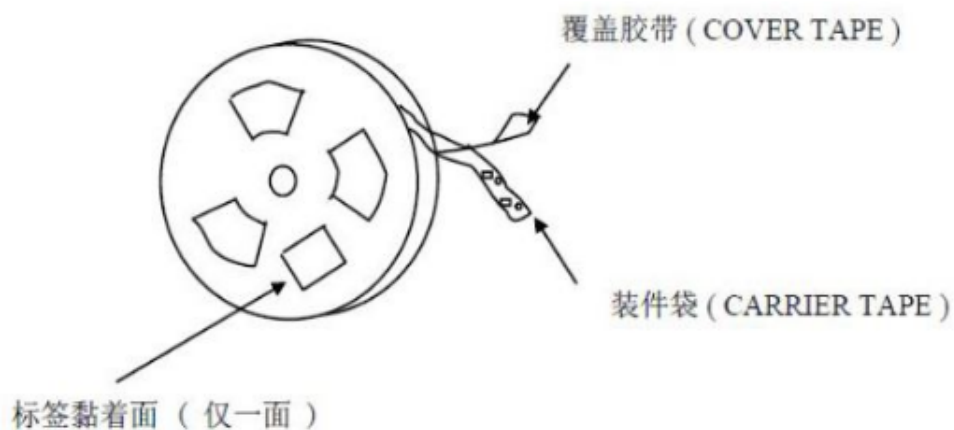


DEVICE TYPE	Tape width	7" Reel		
		Q'TY/REEL (pcs)	BOX/CARTOON	Q'TY/REEL (pcs)
SOD-123FL	8mm	3000	80	240000



Outline Dimensions

SOD123FL

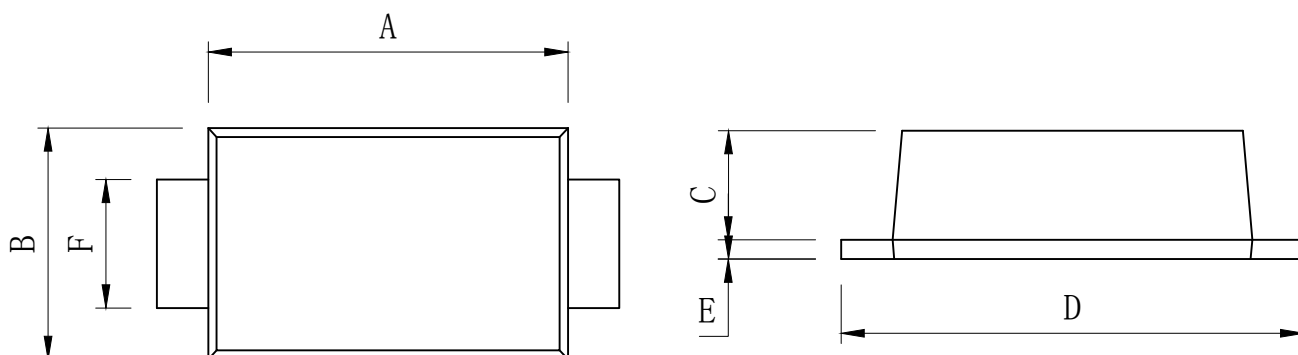

SOD123FL				
DIM	INC HES		MM	
	MIN	MAX	MIN	MAX
A	0.10	0.12	2.5	3
B	0.06	0.08	1.5	2
C	0.03	0.06	0.7	1.5
D	0.12	0.16	3	4
E	/	0.01	/	0.3
F	0.02	0.06	0.5	1.5



Important Statements and disclaimers.

Do not copy or modify file information without permission.

Xumao Micro reserves the right to modify this document and its products.

Specifications are available without prior notice. Customer shall obtain and confirm the latest product information and specifications prior to final design, purchase or use.

Xumao Micro does not assume any implied warranties, including warranties of fitness for special purposes, non-infringement and merchantability.

The products shown here are not designed and licensed for demanding equipment at a level of reliability or for human life and any life-saving related applications or life-sustaining, such as medical devices, transportation equipment, aerospace machinery, and so on. Customers who use or sell these products for such applications do so at their own risk.

As Xumao Micro uses batch number as tracking benchmark, please provide batch number for tracking in case of exception.