
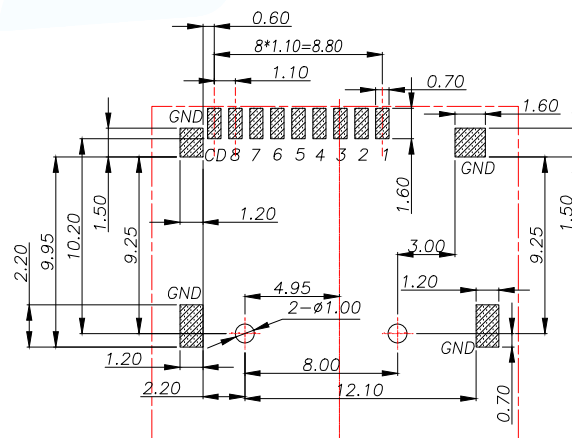
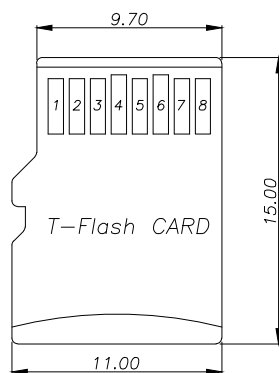
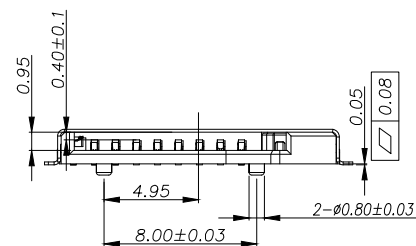


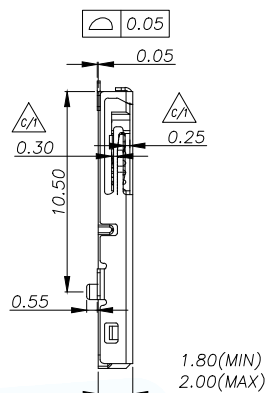


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

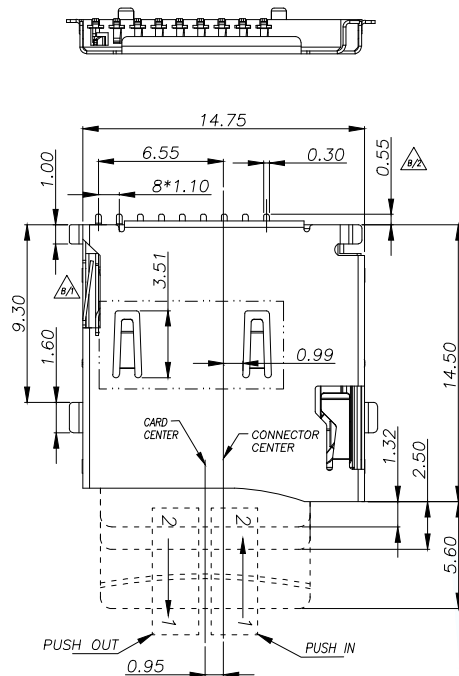

 PAD AREA
 KEEP OUT AREA


RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.05

Circuit Diagram for Detect Switch

WITHOUT CARD	OPEN	
INSERTING CARD	CLOSE	

Specification:

- Electrical Characteristics:**
 - Contact Current Rating: 0.5 Amperes.
 - Dielectric Withstanding Voltage: AC500V r.m.s.
 - Insulation Resistance: 1000 MΩ Minimum.
 - Contact Resistance: 40 mΩ Maximum.
- Environmental:**
 - Operating Temperature: -25°C~+90°C.
- Environmental:**
 - Mating Cycles: 5,000 Insertions.
- Mechanical Characteristics:**
 - Card Push Insertion/Out Force: 0.2~1.40kgf.
 - Contact Separation Force: 0.20kgf Minimum.
- Material:**
 - Insulator: HI-Temp Plastic UL 94V-0 Rated.
 - Contact: Copper Alloy (t=0.15mm).
 - Shell: Stainless Steel (t=0.15mm).
 - Spring: SWP.
 - Salt spray time: 24H

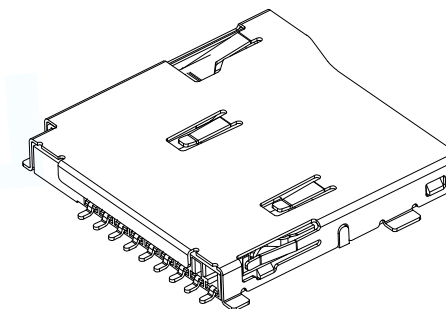




TF CARD PIN DEFINE

PIN NO.	NAME	YYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

TOLERANCE		 深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd	
X.X:±0.35	X.X':±3°	PART NO.	TITLE: MICRO SD CARD PUSH
X.XX:±0.25	X.XX':±2°	TF-015	PUSH SMT 镀金 双压片 外焊
X.XXX:±0.15		DESIGN: Ethan	MANUFACTURE DWG
UNITS	mm	CHED: Olvia	
MATERILA	---	APPD: Ava	
FINISH	---		


SCALE	SHEET
N:A	1/1

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

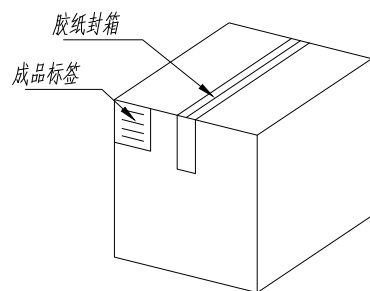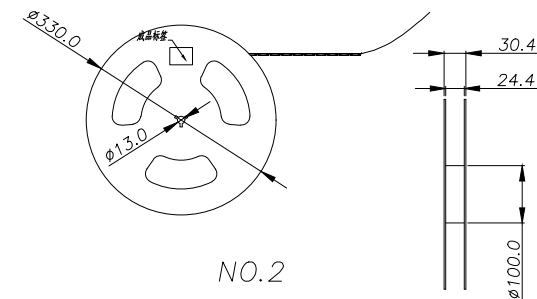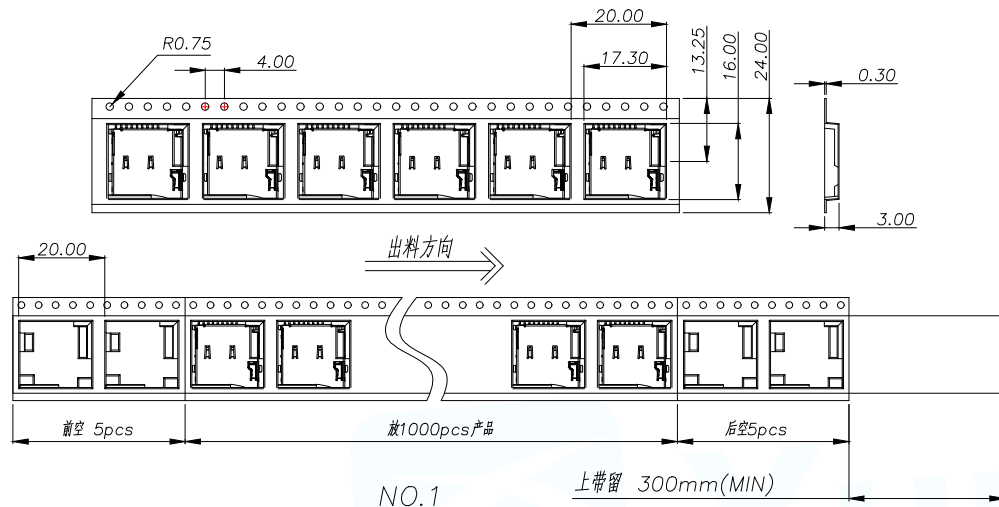

纸箱规格:340*340*322

NO.4

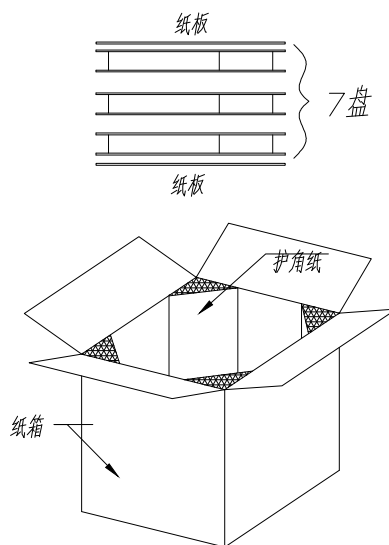

NO.3

1. 材质要求:

- 1.1 纸箱的材质为K=K;外形尺寸为34*34*32.2;
- 1.2 卷盘的材质为PS,卷盘的外形尺寸为 $\phi 330 \times 30.4$;

2. 包装方式:

- 2.1 将卷带放入包装机后,前空5PCS,后放产品1000PCS,再后空5PCS;上带留300MM长度.
- 2.2 将包装好的产品从包装机上取下并包装好,贴上内盘标签;
- 2.3 把累叠好的7盘叠放入纸箱中共计7Kset,上下放纸板;
- 2.4 把包装好的成品打包封箱,并在纸箱外贴上标签

TOLERANCE		 深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
X.X:±0.35	X.X':±3"	PART NO. TF-015	TITLE: MICRO SD CARD PUSH PUSH SMT 双压片 外押 包装图		
X.XX:±0.25	X.XX':±2"				
X.XXX:±0.15					
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG		
MATERILA	— — —	CHED: Olvia		SCALE	SHEET
FINISH	— — —	APPD: Ava		N:A	1/1