

APPROVAL SHEET

MULTILAYER CERAMIC CAPACITORS

MG Series Capacitors (MG)

0201 to 1812 Sizes

NP0, X7R, X5R, Dielectrics

6.3V to 3000V

Halogen Free & RoHS Compliance

*Contents in this sheet are subject to change without prior notice.

Multilayer Ceramic Capacitors

1. DESCRIPTION

MLCC consists of a conducting material and electrodes. To manufacture a chip-type SMT and achieve miniaturization, high density and high efficiency, ceramic condensers are used.

WTC's MG series MLCC is made by NP0, X7R & X5R dielectrics and which provides product with high electrical precision, stability and reliability. Besides, MG series MLCC is tighten controlling in quality in line to assure quality performance in infotainment/comfort equipment (automotive non-safety device) and industrial equipment applications.

2. FEATURES

- A wide selection of sizes is available (0402 to 1812).
- High capacitance in given case size.
- Capacitor with lead-free termination (pure Tin).


3. APPLICATIONS

- For Navigation & Information equipments.
- For entertainment equipments
- For comfortable equipments.
- For Industrial equipments.

4. HOW TO ORDER

<u>MG</u>	<u>31</u>	<u>B</u>	<u>104</u>	<u>K</u>	<u>500</u>	<u>C</u>	<u>I</u>
<u>Series</u>	<u>Size</u>	<u>Dielectric</u>	<u>Capacitance</u>	<u>Tolerance</u>	<u>Rated voltage</u>	<u>Termination</u>	<u>Packaging style</u>
MG= Industry & Automotive (without AEC-Q200 certification)	03=0201 (0603) 15=0402 (1005) 18=0603 (1608) 21=0805 (2012) 31=1206 (3216) 32=1210 (3225) 43=1812 (4532)	N=NP0 (C0G) B=X7R X=X5R	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 0R5=0.5pF 1R0=1.0pF 104=10x10 ⁴ =100nF	B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3=6.3 VDC 100=10 VDC 160=16 VDC 250=25 VDC 500=50 VDC 101=100 VDC 201=200 VDC 251=250 VDC 501=500 VDC 631=630 VDC 102=1000 VDC 302=3000 VDC	C=Cu/Ni/Sn	T=7" reeled G=13" reeled

5. EXTERNAL DIMENSIONS

Outline	Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol		Soldering Method *	M _B (mm)
 Fig. 1 The outline of MLCC	01R5 (0402)	0.4±0.02	0.2±0.02	0.2±0.02	V	R	0.10±0.03
	0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03	L	R	0.15±0.05
		0.6±0.05 ^{#2}	0.3±0.05 ^{#2}	0.3±0.05 ^{#2}			0.15±0.1/-0.05
		0.6±0.09 ^{#3}	0.3±0.09 ^{#3}	0.3±0.09 ^{#3}			
	0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05	N	R	0.25 +0.05/-0.10
				0.50±0.02/-0.05	Q	R	
		1.00±0.20	0.50±0.20	0.5±0.20	E	R	
	0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07	S	R / W	0.40±0.15
		1.60+0.15/-0.10	0.80+0.15/-0.10	0.50±0.10	H	R / W	
				0.80+0.15/-0.10	X	R / W	
		1.60±0.20 ^{#1}	0.80±0.20 ^{#1}	0.8±0.20 ^{#1}			
	0805 (2012)	2.00±0.15	1.25±0.10	0.50±0.10	H	R / W	0.50±0.20
				0.60±0.10	A	R / W	
				0.80±0.10	B	R / W	
				1.25±0.10	D	R	
		2.00±0.20	1.25±0.20	0.85±0.10	T	R / W	
				1.25±0.20	I	R	
	1206 (3216)	3.20±0.15	1.60±0.15	0.80±0.10	B	R / W	0.60±0.20 (0.5±0.25) ^{***}
				0.95±0.10	C	R	
				1.25±0.10	D	R	
		3.20±0.20	1.60±0.20	1.15±0.15	J	R	
				1.60±0.20	G	R	
				0.85±0.10	T	R / W	
	3.20+0.30/-0.10	1.60+0.30/-0.10	1.60+0.30/-0.10	P	R		
	1210 (3225)	3.20±0.30	2.50±0.20	0.95±0.10	C	R	0.75±0.25
				0.85±0.10	T	R	
				1.25±0.10	D	R	
		3.20±0.40	2.50±0.30	1.60±0.20	G	R	
				2.00±0.20	K	R	
				2.50±0.30	M	R	
	3.20±0.60 ^{#4}	2.50±0.50 ^{#4}	2.50±0.50 ^{#4}				
	1808 (4520)	4.50±0.40 (4.5+0.5/-0.3) ^{**}	2.03±0.25	1.25±0.10	D	R	0.75±0.25 (0.5±0.25) ^{***}
				1.40±0.15	F	R	
				1.60±0.20	G	R	
				2.00±0.20	K	R	
	1812 (4532)	4.50±0.40 (4.5+0.5/-0.3) ^{**}	3.20±0.30	1.25±0.10	D	R	0.75±0.25 (0.5±0.25) ^{***}
				1.60±0.20	G	R	
				2.00±0.20	K	R	
3.20±0.40			2.50±0.30	M	R		
			2.80±0.30	U	R		

* R = Reflow soldering process ; W = Wave soldering process.

** For 1808/1812/1825_200V~4000V and safety certificated products.

*** For 1206_≥1000V, 1808/1812_200V~4000V and safety certificated products.

#1: For 0603/Cap ≥ 10μF or 0603(≤6.3V)/Cap ≥ 4.7μF or 0603(>10V)/Cap > 1μF products,

Excluding 0603X225(16V&25V), 0603S225(6.3V&16V), 0603X475(6.3V&16V), 0603S475(4V&6.3V).

#2: For 0201/ 0.1μF < Cap < 0.68μF products, Excluding 0201X334~474(≤6.3V) & 0201X224(≤10V).

#3: For 0201/Cap ≥ 0.68μF products, Excluding 0201X105*6R3=>(L:0.6±0.05,W:0.3±0.05,T:0.3±0.05).

#4: For 1210(200V&250V)/Cap > 0.47μF products.

#5: For 1206(100V)/Cap ≥ 1.2μF products.

Multilayer Ceramic Capacitors

Approval Sheet

6. GENERAL ELECTRICAL DATA

Dielectric	NP0	X7R	X5R
Size	0201, 0402, 0603, 0805, 1206, 1210, 1812		
Capacitance range*	0.1pF to 0.047μF	100pF to 2.2μF	0.068μF to 10μF
Capacitance tolerance**	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%)	J (±5%), K (±10%), M (±20%)	
Rated voltage (WVDC)	10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1000V, 3000V		6.3V, 10V, 16V, 25V
Operating temperature	-55 to +125°C		-55 to +85°C
Capacitance characteristic	±30ppm/°C	±15%	
Termination	Ni/Sn (lead-free termination)		

* Measured at the condition of 30~70% related humidity.

NP0: Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap>1000pF, 25°C at ambient temperature
Measured at 1.0±0.2Vrms, 1.0kHz±10% for C≤10μF; 0.5±0.2Vrms, 120Hz±20% for C>10μF, 30~70% related humidity, 25°C ambient temperature for X7R, X5R.

** Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.



Multilayer Ceramic Capacitors

7. CAPACITANCE RANGE (NP0 Dielectric)

NP0 Dielectric 0201, 0402, 0603 Sizes

DIELECTRIC		NP0																
SIZE		0201					0402					0603						
RATED VOLTAGE (VDC)		10	16	25	50	100	10	16	25	50	100	10	16	25	50	100	200	250
Capacitance	0.1pF (0R1)	L	L	L	L	L	N	N	N	N	N							
	0.2pF (0R2)	L	L	L	L	L	N	N	N	N	N							
	0.3pF (0R3)	L	L	L	L	L	N	N	N	N	N							
	0.4pF (0R4)	L	L	L	L	L	N	N	N	N	N							
	0.5pF (0R5)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	0.6pF (0R6)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	0.7pF (0R7)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	0.8pF (0R8)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	0.9pF (0R9)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	1.0pF (1R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	1.2pF (1R2)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	1.5pF (1R5)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	1.8pF (1R8)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	2.0pF (2R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	2.2pF (2R2)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	2.7pF (2R7)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	3.0pF (3R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	3.3pF (3R3)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	3.9pF (3R9)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	4.0pF (4R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	4.7pF (4R7)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	5.0pF (5R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	5.6pF (5R6)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	6.0pF (6R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	6.8pF (6R8)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	7.0pF (7R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	8.0pF (8R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	8.2pF (8R2)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	9.0pF (9R0)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	10pF (100)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	12pF (120)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	15pF (150)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	18pF (180)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	22pF (220)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	27pF (270)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	33pF (330)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	39pF (390)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	47pF (470)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	56pF (560)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	68pF (680)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	82pF (820)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	100pF (101)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	120pF (121)	L	L	L	L	L	N	N	N	N	N	S	S	S	S	S	S	S
	150pF (151)						N	N	N	N	N	S	S	S	S	S	S	S
	180pF (181)						N	N	N	N	N	S	S	S	S	S	S	S
	220pF (221)						N	N	N	N	N	S	S	S	S	S	S	S
270pF (271)						N	N	N	N	N	S	S	S	S	S	X	X	
330pF (331)						N	N	N	N	N	S	S	S	S	S	X	X	
390pF (391)						N	N	N	N	N	S	S	S	S	S	X	X	
470pF (471)						N	N	N	N	N	S	S	S	S	S	X	X	
560pF (561)						N	N	N	N	N	S	S	S	S	S	X	X	
680pF (681)						N	N	N	N	N	S	S	S	S	S	X	X	
820pF (821)						N	N	N	N	N	S	S	S	S	S	X	X	
1.000pF (102)						N	N	N	N	N	S	S	S	S	S			
1.200pF (122)											X	X	X	X	X			
1.500pF (152)											X	X	X	X	X			
1.800pF (182)											X	X	X	X	X			
2.200pF (222)											X	X	X	X				
2.700pF (272)											X	X	X	X				
3.300pF (332)											X	X	X	X				
3.900pF (392)																		
4.700pF (472)																		
5.600pF (562)																		
6.800pF (682)																		
8.200pF (822)																		
0.01uF (103)																		

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

Approval Sheet

NP0 Dielectric 0805 Size (Continued)

DIELECTRIC		NP0								
SIZE		0805								
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630
Capacitance	0.5pF (0R5)	A	A	A	A	A	A	A	A	A
	0.6pF (0R6)	A	A	A	A	A	A	A	A	A
	0.7pF (0R7)	A	A	A	A	A	A	A	A	A
	0.8pF (0R8)	A	A	A	A	A	A	A	A	A
	0.9pF (0R9)	A	A	A	A	A	A	A	A	A
	1.0pF (1R0)	A	A	A	A	A	A	A	A	A
	1.2pF (1R2)	A	A	A	A	A	A	A	A	A
	1.5pF (1R5)	A	A	A	A	A	A	A	A	A
	1.8pF (1R8)	A	A	A	A	A	A	A	A	A
	2.2pF (2R2)	A	A	A	A	A	A	A	A	A
	2.7pF (2R7)	A	A	A	A	A	A	A	A	A
	3.3pF (3R3)	A	A	A	A	A	A	A	A	A
	3.9pF (3R9)	A	A	A	A	A	A	A	A	A
	4.7pF (4R7)	A	A	A	A	A	A	A	A	A
	5.6pF (5R6)	A	A	A	A	A	A	A	A	A
	6.8pF (6R8)	A	A	A	A	A	A	A	A	A
	8.2pF (8R2)	A	A	A	A	A	A	A	A	A
	10pF (100)	A	A	A	A	A	A	A	A	A
	12pF (120)	A	A	A	A	A	A	A	A	A
	15pF (150)	A	A	A	A	A	A	A	A	A
	18pF (180)	A	A	A	A	A	A	A	A	A
	22pF (220)	A	A	A	A	A	A	A	A	A
	27pF (270)	A	A	A	A	A	A	A	A	A
	33pF (330)	A	A	A	A	A	A	A	A	A
	39pF (390)	A	A	A	A	A	A	A	A	A
	47pF (470)	A	A	A	A	A	A	A	A	A
	56pF (560)	A	A	A	A	A	A	A	A	A
	68pF (680)	A	A	A	A	A	A	A	A	A
	82pF (820)	A	A	A	A	A	A	A	B	B
	100pF (101)	A	A	A	A	A	B	B	B	B
	120pF (121)	A	A	A	A	A	B	B	D	D
	150pF (151)	A	A	A	A	A	D	D	D	D
	180pF (181)	A	A	A	A	A	D	D	D	D
	220pF (221)	A	A	A	A	A	D	D	D	D
	270pF (271)	A	A	A	A	A	D	D	D	D
	330pF (331)	A	A	A	A	A	D	D	D	D
	390pF (391)	B	B	B	B	B	D	D	D	D
	470pF (471)	B	B	B	B	B	D	D	I	I
	560pF (561)	B	B	B	B	B	D	D	I	I
	680pF (681)	B	B	B	B	B	D	D	I	I
	820pF (821)	B	B	B	B	B	D	D	I	I
	1,000pF (102)	B	B	B	B	B	D	D	I	I
	1,200pF (122)	B	B	B	B	B	D	D	I	I
	1,500pF (152)	B	B	B	B	B	D	D	I	I
	1,800pF (182)	B	B	B	B	B	D	D	I	I
	2,200pF (222)	B	B	B	B	B	D	D	I	I
	2,700pF (272)	D	D	D	D	D	I	I		
	3,300pF (332)	D	D	D	D	D	I	I		
	3,900pF (392)	D	D	D	D	D	I	I		
	4,700pF (472)	D	D	D	D	D	I	I		
	5,600pF (562)	D	D	D	D	D				
	6,800pF (682)	D	D	D	D	D				
	8,200pF (822)	D	D	D	D	D				
	0.01μF (103)	D	D	D	D	D				
	0.012μF (123)	D	D	D	D	D				
	0.015μF (153)	D	D	D	D	D				
	0.018μF (183)	D	D	D	D	D				
	0.022μF (223)	D	D	D	D	D				

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

Approval Sheet

NP0 Dielectric 1206 Size (Continued)

DIELECTRIC		NP0									
SIZE		1206									
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000
Capacitance	1.0pF (1R0)										
	1.2pF (1R2)	B	B	B	B	B	B	B	B	B	
	1.5pF (1R5)	B	B	B	B	B	B	B	B	B	B
	1.8pF (1R8)	B	B	B	B	B	B	B	B	B	B
	2.2pF (2R2)	B	B	B	B	B	B	B	B	B	B
	2.7pF (2R7)	B	B	B	B	B	B	B	B	B	B
	3.3pF (3R3)	B	B	B	B	B	B	B	B	B	B
	3.9pF (3R9)	B	B	B	B	B	B	B	B	B	B
	4.7pF (4R7)	B	B	B	B	B	B	B	B	B	B
	5.6pF (5R6)	B	B	B	B	B	B	B	B	B	B
	6.8pF (6R8)	B	B	B	B	B	B	B	B	B	B
	8.2pF (8R2)	B	B	B	B	B	B	B	B	B	B
	10pF (100)	B	B	B	B	B	B	B	B	B	B
	12pF (120)	B	B	B	B	B	B	B	B	B	B
	15pF (150)	B	B	B	B	B	B	B	B	B	B
	18pF (180)	B	B	B	B	B	B	B	B	B	B
	22pF (220)	B	B	B	B	B	B	B	B	B	D
	27pF (270)	B	B	B	B	B	B	B	B	B	D
	33pF (330)	B	B	B	B	B	B	B	B	B	D
	39pF (390)	B	B	B	B	B	B	B	B	B	D
	47pF (470)	B	B	B	B	B	B	B	B	B	D
	56pF (560)	B	B	B	B	B	B	B	B	B	D
	68pF (680)	B	B	B	B	B	B	B	B	B	D
	82pF (820)	B	B	B	B	B	B	B	B	B	D
	100pF (101)	B	B	B	B	B	B	B	B	B	D
	120pF (121)	B	B	B	B	B	B	B	B	B	D
	150pF (151)	B	B	B	B	B	B	B	B	B	D
	180pF (181)	B	B	B	B	B	B	B	B	B	G
	220pF (221)	B	B	B	B	B	B	B	B	B	G
	270pF (271)	B	B	B	B	B	B	C	C	C	G
	330pF (331)	B	B	B	B	B	B	C	C	C	G
	390pF (391)	B	B	B	B	B	B	C	C	C	G
	470pF (471)	B	B	B	B	B	B	C	C	C	G
	560pF (561)	B	B	B	B	B	C	D	D	D	G
	680pF (681)	B	B	B	B	B	C	D	D	D	G
	820pF (821)	B	B	B	B	B	C	G	G	G	G
	1,000pF (102)	B	B	B	B	B	C	G	G	G	G
	1,200pF (122)	B	B	B	B	B	C	G	G	G	
	1,500pF (152)	B	B	B	B	B	D	G	G	G	
	1,800pF (182)	B	B	B	B	B	D	G	G	G	
	2,200pF (222)	B	B	B	B	B	D	G	G	G	
	2,700pF (272)	B	B	B	B	B	D	G	G	G	
	3,300pF (332)	B	B	B	B	B	D	G	G	G	
	3,900pF (392)	B	B	B	B	B	D	G	G	G	
	4,700pF (472)	B	B	B	B	B	D	G	G	G	
	5,600pF (562)	B	B	B	B	B	G	G			
	6,800pF (682)	C	C	C	C	C	G	G			
	8,200pF (822)	D	D	D	D	D	G	G			
	0.01μF (103)	D	D	D	D	D	G	G			

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

Approval Sheet

NP0 Dielectric 1210 Size (Continued)

DIELECTRIC		NP0									
SIZE		1210									
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000
Capacitance	10pF (100)	C	C	C	C	C	C	C	C	C	C
	12pF (120)	C	C	C	C	C	C	C	C	C	C
	15pF (150)	C	C	C	C	C	C	C	C	C	C
	18pF (180)	C	C	C	C	C	C	C	C	C	C
	22pF (220)	C	C	C	C	C	C	C	C	C	C
	27pF (270)	C	C	C	C	C	C	C	C	C	C
	33pF (330)	C	C	C	C	C	C	C	C	C	C
	39pF (390)	C	C	C	C	C	C	C	C	C	C
	47pF (470)	C	C	C	C	C	C	C	C	C	C
	56pF (560)	C	C	C	C	C	C	C	C	C	C
	68pF (680)	C	C	C	C	C	C	C	C	C	C
	82pF (820)	C	C	C	C	C	C	C	C	C	C
	100pF (101)	C	C	C	C	C	C	C	C	C	D
	120pF (121)	C	C	C	C	C	C	C	C	C	D
	150pF (151)	C	C	C	C	C	C	C	C	C	D
	180pF (181)	C	C	C	C	C	C	C	C	C	D
	220pF (221)	C	C	C	C	C	C	C	C	C	G
	270pF (271)	C	C	C	C	C	C	C	C	C	G
	330pF (331)	C	C	C	C	C	C	C	C	C	G
	390pF (391)	C	C	C	C	C	C	C	C	C	G
	470pF (471)	C	C	C	C	C	C	C	C	C	G
	560pF (561)	C	C	C	C	C	C	C	C	C	G
	680pF (681)	C	C	C	C	C	C	C	C	C	G
	820pF (821)	C	C	C	C	C	C	C	C	C	G
	1,000pF (102)	C	C	C	C	C	D	D	D	D	G
	1,200pF (122)	C	C	C	C	C	D	D	D	D	K
	1,500pF (152)	C	C	C	C	C	D	D	D	D	K
	1,800pF (182)	C	C	C	C	C	D	D	D	D	K
	2,200pF (222)	C	C	C	C	C	D	D	D	D	K
	2,700pF (272)	C	C	C	C	C	D	D	D	D	K
	3,300pF (332)	C	C	C	C	C	D	D	D	D	K
	3,900pF (392)	C	C	C	C	C	D	D	D	D	K
	4,700pF (472)	C	C	C	C	C	G	G	G	G	K
	5,600pF (562)	C	C	C	C	C	G	G	G	G	K
	6,800pF (682)	C	C	C	C	C	G	G	G	G	K
	8,200pF (822)	C	C	C	C	C	G	G	G	G	K
	0.010μF (103)	C	C	C	C	C	G	G	K	K	M
	0.012μF (123)	D	D	D	D	D	K	K	M	M	M
	0.015μF (153)	D	D	D	D	D	K	K	M	M	M
	0.018μF (183)	K	K	K	K	K	K	K			
	0.022μF (223)	K	K	K	K	K	K	K			
	0.027μF (273)	K	K	K	K	K	K	K			
	0.033μF (333)	K	K	K	K	K	K	K			
	0.039μF (393)	K	K	K	K	K	K	K			
	0.047μF (473)	K	K	K	K	K	K	K			

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

NP0 Dielectric 1812 Size (Continued)

DIELECTRIC		NP0				
SIZE		1812				
RATED VOLTAGE (VDC)		10	16	25	50	100
Capacitance	10pF (100)					D
	12pF (120)					D
	15pF (150)					D
	18pF (180)					D
	22pF (220)					D
	27pF (270)					D
	33pF (330)					D
	39pF (390)					D
	47pF (470)					D
	56pF (560)					D
	68pF (680)					D
	82pF (820)					D
	100pF (101)					D
	120pF (121)					D
	150pF (151)					D
	180pF (181)					D
	220pF (221)					D
	270pF (271)					D
	330pF (331)					D
	390pF (391)					D
	470pF (471)					D
	560pF (561)					D
	680pF (681)					D
	820pF (821)					D
	1,000pF (102)	D	D	D	D	D
	1,200pF (122)	D	D	D	D	D
	1,500pF (152)	D	D	D	D	D
	1,800pF (182)	D	D	D	D	D
	2,200pF (222)	D	D	D	D	D
	2,700pF (272)	D	D	D	D	D
	3,300pF (332)	D	D	D	D	D
	3,900pF (392)	D	D	D	D	D
	4,700pF (472)	D	D	D	D	D
	5,600pF (562)	D	D	D	D	D
	6,800pF (682)	D	D	D	D	D
	8,200pF (822)	D	D	D	D	D
	0.010μF (103)	D	D	D	D	D
	0.012μF (123)	D	D	D	D	D
	0.015μF (153)	D	D	D	D	D
	0.018μF (183)	D	D	D	D	D
	0.022μF (223)	D	D	D	D	D
	0.027μF (273)	D	D	D	D	D
	0.033μF (333)	D	D	D	D	D
	0.039μF (393)					

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

8. CAPACITANCE RANGE (X7R Dielectric)

X7R Dielectric 0201, 0402, 0603 Sizes

DIELECTRIC		X7R													
SIZE		0201				0402					0603				
RATED VOLTAGE (VDC)		10	16	25	50	10	16	25	50	100	10	16	25	50	100
Capacitance	100pF (101)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	120pF (121)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	150pF (151)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	180pF (181)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	220pF (221)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	270pF (271)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	330pF (331)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	390pF (391)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	470pF (471)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	560pF (561)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	680pF (681)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	820pF (821)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	1,000pF (102)	L	L	L	L	N	N	N	N	N	S	S	S	S	S
	1,200pF (122)	L	L	L		N	N	N	N		S	S	S	S	S
	1,500pF (152)	L	L	L		N	N	N	N		S	S	S	S	S
	1,800pF (182)	L	L	L		N	N	N	N		S	S	S	S	S
	2,200pF (222)	L	L	L		N	N	N	N		S	S	S	S	S
	2,700pF (272)	L	L	L		N	N	N	N		S	S	S	S	S
	3,300pF (332)	L	L	L		N	N	N	N		S	S	S	S	S
	3,900pF (392)	L	L	L		N	N	N	N		S	S	S	S	S
	4,700pF (472)	L	L	L		N	N	N	N		S	S	S	S	S
	5,600pF (562)	L	L	L		N	N	N	N		S	S	S	S	S
	6,800pF (682)	L				N	N	N	N		S	S	S	S	S
	8,200pF (822)	L				N	N	N	N		S	S	S	S	S
	0.010μF (103)	L				N	N	N	N		S	S	S	S	S
	0.012μF (123)					N	N	N			S	S	S	S	X
	0.015μF (153)					N	N	N			S	S	S	S	X
	0.018μF (183)					N	N	N	N		S	S	S	S	X
	0.022μF (223)					N	N	N	N		S	S	S	S	X
	0.027μF (273)					N	N	N	N		S	S	S	S	X
	0.033μF (333)					N	N	N	N		S	S	S	X	X
	0.039μF (393)					N	N	N	N		S	S	S	X	X
	0.047μF (473)					N	N	N	N		S	S	S	X	X
	0.056μF (563)					N	N	N	N		S	S	S	X	
	0.068μF (683)					N	N	N	N		S	S	S	X	
	0.082μF (823)					N	N	N	N		S	S	S	X	
	0.10μF (104)					N	N	N	N		S	S	S	X	
	0.12μF (124)										S	S	X		
	0.15μF (154)										S	S	X	X	
	0.18μF (184)										S	S	X		
	0.22μF (224)										S	S	X	X	
	0.27μF (274)										X	X	X		
	0.33μF (334)										X	X	X	X	
	0.39μF (394)										X	X	X		
	0.47μF (474)										X	X	X		

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

X7R Dielectric 0805, 1206 Size

DIELECTRIC		X7R																		
SIZE		0805									1206									
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	630	1000	10	16	25	50	100	200	250	500	630
Capacitance	100pF (101)	B	B	B	B	B	B	B	B	B	B						D	D	D	D
	120pF (121)	B	B	B	B	B	B	B	B	B	B						D	D	D	D
	150pF (151)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	180pF (181)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	220pF (221)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	270pF (271)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	330pF (331)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	390pF (391)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	470pF (471)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	560pF (561)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	680pF (681)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	820pF (821)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	1,000pF (102)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	1,200pF (122)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	D	D	D	D
	1,500pF (152)	B	B	B	B	B	B	B	B	B	D	B	B	B	B	B	D	D	D	D
	1,800pF (182)	B	B	B	B	B	B	B	B	B	D	B	B	B	B	B	D	D	D	D
	2,200pF (222)	B	B	B	B	B	B	B	B	B	D	B	B	B	B	B	D	D	D	D
	2,700pF (272)	B	B	B	B	B	B	B	B	B	D	B	B	B	B	B	D	D	D	D
	3,300pF (332)	B	B	B	B	B	B	B	B	B	D	B	B	B	B	B	D	D	D	D
	3,900pF (392)	B	B	B	B	B	B	B	B	B	D	B	B	B	B	B	D	D	D	D
	4,700pF (472)	B	B	B	B	B	B	B	D	D	D	B	B	B	B	B	D	D	D	D
	5,600pF (562)	B	B	B	B	B	B	B	D	D	D	B	B	B	B	B	D	D	D	D
	6,800pF (682)	B	B	B	B	B	B	B	D	D	D	B	B	B	B	B	D	D	D	D
	8,200pF (822)	B	B	B	B	B	B	B	D	D	D	B	B	B	B	B	D	D	D	D
	0.010μF (103)	B	B	B	B	B	D	D	D	D	D	B	B	B	B	B	D	D	D	D
	0.012μF (123)	B	B	B	B	B	D	D				B	B	B	B	B	D	D		
	0.015μF (153)	B	B	B	B	B	D	D				B	B	B	B	B	D	D		
	0.018μF (183)	B	B	B	B	B	D	D				B	B	B	B	B	D	D		
	0.022μF (223)	B	B	B	B	B	D	D				B	B	B	B	B	D	D		
	0.027μF (273)	B	B	B	B	D						B	B	B	B	B	D	D		
	0.033μF (333)	B	B	B	B	D						B	B	B	B	B	G	G		
	0.039μF (393)	B	B	B	B	D						B	B	B	B	B	G	G		
	0.047μF (473)	B	B	B	B	D						B	B	B	B	B	G	G		
	0.056μF (563)	B	B	B	B	D						B	B	B	B	B	G	G		
	0.068μF (683)	B	B	B	B	D						B	B	B	B	B	G	G		
	0.082μF (823)	B	B	B	B	D						B	B	B	B	D	G	G		
	0.10μF (104)	B	B	B	B	D						B	B	B	B	D	G	G		
	0.12μF (124)	B	B	B	D							B	B	B	B	D				
	0.15μF (154)	D	D	D	D							C	C	C	C	G				
	0.18μF (184)	D	D	D	D							C	C	C	C	G				
	0.22μF (224)	D	D	D	D							C	C	C	C	G				
	0.27μF (274)	D	D	D	I							C	C	C	D					
	0.33μF (334)	D	D	D	I							C	C	C	D					
	0.39μF (394)	D	D	D	I							C	C	J	P					
	0.47μF (474)	D	D	D	I							J	J	J	P					
	0.56μF (564)	D	D	D								J	J	J	P					
0.68μF (684)	D	D	D	I							J	J	J	P						
0.82μF (824)	D	D	D								J	J	J	P						
1.0μF (105)	D	D	D	I							J	J	J	P						
1.5μF (155)											J	J	P							
2.2μF (225)											J	J	P							
4.7μF (475)																				
10μF (106)																				

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

Approval Sheet

X7R Dielectric 1210, 1812 Size

DIELECTRIC		X7R																
SIZE		1210*								1812								
RATED VOLTAGE (VDC)		10	16	25	50	100	200	250	500	1000	10	16	25	50	100	200	250	3000
Capacitance	100pF (101)							D	D	D								
	120pF (121)							D	D	D								
	150pF (151)							D	D	D								
	180pF (181)							D	D	D								
	220pF (221)							D	D	D								
	270pF (271)							D	D	D								K
	330pF (331)							D	D	D								K
	390pF (391)							D	D	D								K
	470pF (471)							D	D	D								K
	560pF (561)							D	D	D								K
	680pF (681)							C	D	D								K
	820pF (821)							C	D	D								K
	1,000pF (102)	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	K
	1,200pF (122)	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	K
	1,500pF (152)	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	K
	1,800pF (182)	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	M
	2,200pF (222)	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	M
	2,700pF (272)	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	M
	3,300pF (332)	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	M
	3,900pF (392)	C	C	C	C	C	C	C	D	G	D	D	D	D	D	D	D	M
	4,700pF (472)	C	C	C	C	C	C	C	D	G	D	D	D	D	D	D	D	M
	5,600pF (562)	C	C	C	C	C	C	C	D	G	D	D	D	D	D	D	D	
	6,800pF (682)	C	C	C	C	C	C	C	D	G	D	D	D	D	D	D	D	
	8,200pF (822)	C	C	C	C	C	C	C	D	G	D	D	D	D	D	D	D	
	0.010μF (103)	C	C	C	C	C	C	C	D	G	D	D	D	D	D	D	D	
	0.012μF (123)	C	C	C	C	C	C	C	D		D	D	D	D	D	D	D	
	0.015μF (153)	C	C	C	C	C	C	C	D		D	D	D	D	D	D	D	
	0.018μF (183)	C	C	C	C	C	C	C	D		D	D	D	D	D	D	D	
	0.022μF (223)	C	C	C	C	C	C	C	D		D	D	D	D	D	D	D	
	0.027μF (273)	C	C	C	C	C	C	C			D	D	D	D	D	D	D	
	0.033μF (333)	C	C	C	C	C	C	C			D	D	D	D	D	D	D	
	0.039μF (393)	C	C	C	C	C	C	C			D	D	D	D	D	D	D	
	0.047μF (473)	C	C	C	C	C	D	D			D	D	D	D	D	D	D	
	0.056μF (563)	C	C	C	C	C	D	D			D	D	D	D	D	D	D	
	0.068μF (683)	C	C	C	C	C	G	G			D	D	D	D	D	D	D	
	0.082μF (823)	C	C	C	C	C	G	G			D	D	D	D	D	D	D	
	0.10μF (104)	C	C	C	C	C	G	G			D	D	D	D	D	D	D	
	0.12μF (124)	C	C	C	C	C	G	G			D	D	D	D	D	D	D	
	0.15μF (154)	C	C	C	C	D	M	M			D	D	D	D	D	K	K	
	0.18μF (184)	C	C	C	C	D	M	M			D	D	D	D	D	K	K	
0.22μF (224)	C	C	C	C	D	M	M			D	D	D	D	D	K	K		
0.27μF (274)	C	C	C	C	G	M	M			D	D	D	D	D	K	K		
0.33μF (334)	C	C	C	D	G	M	M			D	D	D	D	D	K	K		
0.39μF (394)	C	C	C	D	M	M	M			D	D	D	D	D	K	K		
0.47μF (474)	C	C	C	D	M	M	M			D	D	D	D	K	K	K		
0.56μF (564)	D	D	D	D	M					D	D	D	D	K				
0.68μF (684)	D	D	D	D	K					D	D	D	K	K				
0.82μF (824)	D	D	D	D	K					D	D	D	K	K				
1.0μF (105)	D	D	D	D	K					D	D	D	K	K				
1.5μF (155)	K	K	G												K			
2.2μF (225)	K	K	G												M			

*. X7R/1210 can provide optional "D" thickness for Cap.154~474=10V~25V & Cap.154~274=50V.

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

9. CAPACITANCE RANGE (X5R Dielectric)

DIELECTRIC		X5R															
SIZE		0402				0603				0805				1206			
RATED VOLTAGE(VDC)		6.3	10	16	25	6.3	10	16	25	6.3	10	16	25	6.3	10	16	25
Capacitance	0.022μF (223)																
	0.033μF (333)																
	0.047μF (473)																
	0.068μF (683)		N														
	0.10μF (104)		N	N													
	0.15μF (154)		N	N													
	0.22μF (224)	N	N	N					X								
	0.33μF (334)	N	N				X	X	X								
	0.47μF (474)	N					X	X	X								
	0.68μF (684)	N					X	X	X								
	1.0μF (105)					X	X	X	X								
	1.5μF (155)									I	I				J	J	P
	2.2μF (225)									I	I	I	I		J	J	P
	3.3μF (335)											I	I		P	P	P
	4.7μF (475)											I	I	P	P	P	P
	6.8μF (685)													P			
	10μF (106)																
	22μF (226)																

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.




Multilayer Ceramic Capacitors

10. PACKAGING STYLE AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0201 (0603)	0.30±0.03	L	15k	70k	-	-
0402 (1005)	0.50±0.05	N	10k	50k	-	-
0603 (1608)	0.80±0.07	S	4k	15k	-	-
	0.80+0.15/-0.10	X	4k	15k	-	-
0805 (2012)	0.60±0.10	A	4k	15k	-	-
	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
	1.25±0.20	I	-	-	3k	10k
1206 (3216)	0.80±0.10	B	4k	15k	-	-
	0.95±0.10	C	-	-	3k	10k
	1.15±0.15	J	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	10k
	1.60+0.30/-0.10	P	-	-	2k	9k
1210 (3225)	0.95±0.10	C	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	8k
	2.00±0.20	K	-	-	1k	6k
	2.50±0.30	M	-	-	1k	6k
1812 (4532)	1.25±0.10	D	-	-	1k	5k
	2.00±0.20	K	-	-	1k	3k
	2.50±0.30	M	-	-	0.5k	3k

Unit: pieces

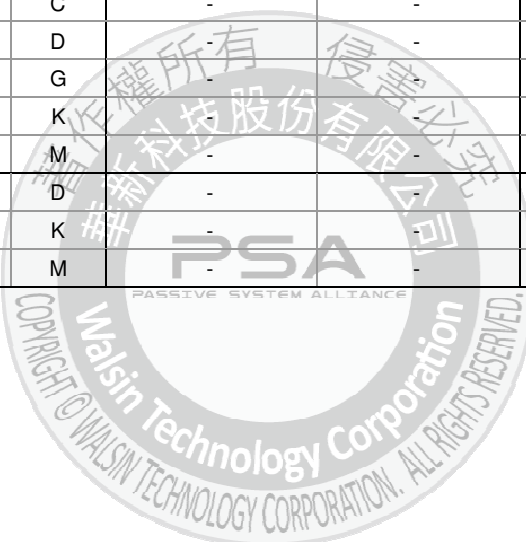

Multilayer Ceramic Capacitors

11. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements				
1.	Visual and Mechanical	---	* No remarkable defect. * Dimensions to conform to individual specification sheet.				
2.	Capacitance	*Test temp.: Room Temperature. *Class I: (NP0) ≤1000pF, 1.0±0.2Vrms · 1MHz±10% >1000pF, 1.0±0.2Vrms · 1KHz±10% Class II: (X7R, X5R) C ≤10μF, 1.0±0.2Vrms · 1KHz±10% ** C >10μF, 0.5±0.2Vrms · 120Hz±20%	* Shall not exceed the limits given in the detailed spec. NP0: Cap≥30pF, Q≥1000; Cap<30pF,Q≥400+20C X7R:				
3.	Q/ D.F. (Dissipation Factor)	** Test condition: 0.5±0.2Vrms · 1KHz±10% X7R: 0603/475(6.3V) X5R ^{#1} : 0201 ≥ 224 (6.3V,10V,16V), 0402 ≥ 475 (6.3V,16V), 0402 ≥ 225(10V), 0603=106 (6.3V) TT18X ≥ 475(10V) , TT15X series #1 Excluding X5R/0201/105(6.3V);225(10V);224(16V), 0402X475M6R3, 0402X106M100 (1.0±0.2Vrms · 1KHz±10%) *Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	Rated vol.	D.F. ≤	Exception of D.F. ≤		
			≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF	
					≤ 3.5%	1812 ≥ 4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF	
					≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF;	
					≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF	
			50V	≤ 2.5%	≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	
					≤ 3.5%	1812 ≥ 4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF	
					≤ 5%	0201 ≥ 0.01μF; 1210 ≥ 3.3μF	
					≤ 10%	0402 ≥ 0.012μF; 0603>0.1μF; 0805/X7R>0.47μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	
			35V	≤ 3.5%	≤ 10%	0603 ≥ 1μF; 0805≥2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	
					≤ 5%	0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF	
					≤ 7%	0603 ≥ 0.33μF	
					≤ 10%	0201 ≥ 0.1μF; 0402 ≥ 0.056μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	
			25V	≤ 3.5%	≤ 12.5%	0402 ≥ 0.33μF	
					≤ 5%	0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF	
					≤ 10%	0201/X7R ≥ 0.022μF; 0402 ≥ 0.15uF; 0603>0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	
					≤ 15%	0201 ≥ 0.012μF; 0402 ≥ 0.15μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF	
			16V	≤ 3.5%	≤ 15%	0201 ≥ 0.1μF; 0402 ≥ 1μF	
					≤ 5%	0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF	
					≤ 20%	0402 ≥ 2.2μF	
					---	---	
			X5R:	Rated vol.	D.F. ≤	Exception of D.F. ≤	
				≥ 100V	≤ 2.5%	≤ 3%	1206 ≥ 0.47μF
						≤ 5%	0603 ≥ 0.068μF; 0805 > 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF
						≤ 10%	0805 > 0.22μF; 1210 ≥ 3.3μF
						≤ 3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF
				50V	≤ 2.5%	≤ 5%	0201 ≥ 0.01μF; 1210 ≥ 3.3μF
						≤ 10%	0402 ≥ 0.012μF; 0603>0.1μF; 0805 ≥ 1μF;1206 ≥ 2.2μF; 1210 ≥ 10μF
						≤ 12.5%	1206=10μF
						≤ 10%	0603 ≥ 1μF; 0805≥2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF
				35V	≤ 3.5%	≤ 5%	0201=0.01μF; 0805 ≥ 1μF
						≤ 7%	0603 ≥ 0.33μF
						≤ 10%	0201>0.01μF; 0402 ≥ 0.10μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 10μF
≤ 12.5%	0402 ≥ 0.33μF;0805=10μF						
25V	≤ 3.5%	≤ 5%		0201=0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF			
		≤ 10%		0201>0.01uF; 0402 ≥ 0.22uF; 0603>0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF			
		≤ 12.5%		0402 ≥ 1μF;0805=10μF			
		≤ 10%		0201 ≥ 0.012μF; 0402 ≥ 0.22μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF; 01R5/X5R			
16V	≤ 3.5%	≤ 15%		0805=10μF			
		≤ 5%		0201>0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF			
		≤ 10%		0201>0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF			
		≤ 20%		0402 ≥ 2.2μF			
10V	≤ 5%	---		---			
		---		---			
		---		---			
		---		---			
6.3V	≤ 10%	---		---			
		---		---			
		---		---			
		---		---			
4V	≤ 15%	---		---			
		---		---			
		---		---			
		---		---			
4.	Dielectric Strength	To apply voltage (≤100V) 250%. 200V~300V ≥2 times VDC 400V~450V ≥1.2 times VDC 500V~999V ≥1.5 times VDC 1000V~3000V ≥1.2 times VDC Duration: 1 to 5 sec. * Charge and discharge current less than 50mA.	* No evidence of damage or flash over during test.				

"Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No	Item	Test Condition	Requirements																																																																													
5.	Insulation Resistance	* Test temp.: Room Temperature. * Rated voltage: $\leq 100V$ To apply rated voltage for MAX. 120sec.	10GΩ or $RxC \geq 500\Omega \cdot F$ whichever is smaller. Class II (X7R, X5R)																																																																													
			<table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: All X7R</td><td rowspan="7">10GΩ or $RxC \geq 100 \Omega \cdot F$ whichever is smaller.</td></tr><tr><td>50V: 0402$\geq 0.01\mu F$; 0603$\geq 1\mu F$; 0805$\geq 1\mu F$; 1206$\geq 4.7\mu F$; 1210$\geq 4.7\mu F$</td></tr><tr><td>35V: 0805$\geq 2.2\mu F$; 1206$\geq 2.2\mu F$; 1210$\geq 10\mu F$</td></tr><tr><td>25V: 0402$\geq 1\mu F$; 0603$\geq 2.2\mu F$; 0805$\geq 2.2\mu F$; 1206$\geq 10\mu F$; 1210$\geq 10\mu F$</td></tr><tr><td>16V: 0201$\geq 0.1\mu F$; 0402$\geq 0.22\mu F$; 0603$\geq 1\mu F$; 0805$\geq 2.2\mu F$; 1206$\geq 10\mu F$; 1210$\geq 47\mu F$</td></tr><tr><td>10V: 0201$\geq 47nF$; 0402$\geq 0.47\mu F$; 0603$\geq 0.47\mu F$; 0805$\geq 2.2\mu F$; 1206$\geq 4.7\mu F$; 1210$\geq 47\mu F$</td></tr><tr><td>6.3V ; 4V ; Size≥ 1812</td></tr><tr><td><table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: 1210$\geq 3.3\mu F$</td><td rowspan="7">$RxC \geq 50 \Omega \cdot F$.</td></tr><tr><td>50V: 0402$\geq 0.1\mu F$; 0603$\geq 2.2\mu F$; 0805$\geq 10\mu F$; 1206$\geq 10\mu F$</td></tr><tr><td>35V: 0603$\geq 1\mu F$;</td></tr><tr><td>25V: 0201$\geq 0.1\mu F$; 0402$\geq 2.2\mu F$; 0603$\geq 10\mu F$; 0805$\geq 10\mu F$; 1206$\geq 22\mu F$</td></tr><tr><td>16V: 0603$\geq 10\mu F$; 0402$\geq 1\mu F$; 0201$\geq 0.22\mu F$</td></tr><tr><td>10V: 0201$\geq 0.1\mu F$; 0402$\geq 1\mu F$; 0603$\geq 10\mu F$; 0805$\geq 47\mu F$</td></tr><tr><td>6.3V: 0201$\geq 0.1\mu F$; 0402$\geq 1\mu F$; 0603$\geq 4.7\mu F$; 0805$\geq 47\mu F$; 1206$\geq 10\mu F$</td></tr><tr><td>4V: 0603$\geq 22\mu F$; 0805$\geq 47\mu F$; 1206$\geq 100\mu F$</td></tr></table></td></tr><tr><td>Rated voltage: To apply rated voltage (500V max.) for 60 sec. 200~630V</td><td>$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$ whichever is smaller</td></tr><tr><td>Rated voltage: To apply 500V for 60 sec. $\geq 630V$</td><td></td></tr><tr><td rowspan="10">6.</td><td rowspan="10">Temperature Coefficient</td><td rowspan="10">With no electrical load.</td><td><table><tr><th>T.C.</th><th>Operating Temp</th><th>T.C.</th><th>Capacitance Change</th></tr><tr><td>NPO</td><td>-55~125°C at 25°C</td><td>NPO</td><td>Within $\pm 30ppm/^{\circ}C$</td></tr><tr><td>X7R</td><td>-55~125°C at 25°C</td><td>X7R</td><td>Within $\pm 15\%$</td></tr><tr><td>X5R</td><td>-55~ 85°C at 25°C</td><td>X5R</td><td>Within $\pm 15\%$</td></tr></table></td></tr><tr><td colspan="2">*Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24$\pm$2 hrs at room temp. * Measurement voltage for Class II:</td></tr><tr><td><table><tr><th>01005</th><th>0201</th></tr><tr><td>Cap$\leq 0.01\mu F$: 0.5V</td><td>Cap$\leq 0.1\mu F$: 1V</td></tr><tr><td>Cap$> 0.01\mu F$: 0.2V</td><td>0.1$\mu F \leq$ Cap$< 1\mu F$: 0.2V*</td></tr><tr><td></td><td>Cap$\geq 1\mu F$: 0.1V*</td></tr><tr><td>*0201X104/6.3V~25V: 0.5V 0201X224/10V~25V: 0.5V 0201X474/10V: 0.5V</td><td>*0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V</td></tr><tr><th>0402</th><th>0603</th></tr><tr><td>Cap$< 1\mu F$: 1V</td><td>Cap$< 1\mu F$: 1V</td></tr><tr><td>Cap=1μF: 0.5V** 0402B224-16V: 0.5V 0402B334/474-6.3V&10V: 0.5V 0402S334/474-6.3V: 0.5V 0402X225/475-6.3V: 0.5V</td><td>1$\mu F \leq$ Cap$\leq 4.7\mu F$: 0.5V 0603X106-10V: 0.5V</td></tr><tr><td>1$\mu F <$ Cap$< 10\mu F$: 0.2V **0402B105M6R3V: 0.2V</td><td>Cap$> 4.7\mu F$: 0.2V</td></tr><tr><td>Cap$\geq 10\mu F$: 0.1V</td><td></td></tr><tr><th>0805</th><th>1206/1210</th></tr><tr><td>Cap$< 10\mu F$: 1V</td><td>Cap$\leq 10\mu F$: 1V</td></tr><tr><td>Cap=10μF: 0.5V 0805B475/6.3V~25V: 0.5V</td><td>10$\mu F <$ Cap$\leq 100\mu F$: 0.5V</td></tr><tr><td>Cap$> 10\mu F$: 0.2V</td><td>Cap$> 100\mu F$: 0.2V 1206X107-6.3V: 0.2V 1210S107-6.3V: 0.2V</td></tr></table></td></tr></table>	Rated voltage	Insulation Resistance	100V: All X7R	10GΩ or $RxC \geq 100 \Omega \cdot F$ whichever is smaller.	50V: 0402 $\geq 0.01\mu F$; 0603 $\geq 1\mu F$; 0805 $\geq 1\mu F$; 1206 $\geq 4.7\mu F$; 1210 $\geq 4.7\mu F$	35V: 0805 $\geq 2.2\mu F$; 1206 $\geq 2.2\mu F$; 1210 $\geq 10\mu F$	25V: 0402 $\geq 1\mu F$; 0603 $\geq 2.2\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 10\mu F$; 1210 $\geq 10\mu F$	16V: 0201 $\geq 0.1\mu F$; 0402 $\geq 0.22\mu F$; 0603 $\geq 1\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 10\mu F$; 1210 $\geq 47\mu F$	10V: 0201 $\geq 47nF$; 0402 $\geq 0.47\mu F$; 0603 $\geq 0.47\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 4.7\mu F$; 1210 $\geq 47\mu F$	6.3V ; 4V ; Size ≥ 1812	<table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: 1210$\geq 3.3\mu F$</td><td rowspan="7">$RxC \geq 50 \Omega \cdot F$.</td></tr><tr><td>50V: 0402$\geq 0.1\mu F$; 0603$\geq 2.2\mu F$; 0805$\geq 10\mu F$; 1206$\geq 10\mu F$</td></tr><tr><td>35V: 0603$\geq 1\mu F$;</td></tr><tr><td>25V: 0201$\geq 0.1\mu F$; 0402$\geq 2.2\mu F$; 0603$\geq 10\mu F$; 0805$\geq 10\mu F$; 1206$\geq 22\mu F$</td></tr><tr><td>16V: 0603$\geq 10\mu F$; 0402$\geq 1\mu F$; 0201$\geq 0.22\mu F$</td></tr><tr><td>10V: 0201$\geq 0.1\mu F$; 0402$\geq 1\mu F$; 0603$\geq 10\mu F$; 0805$\geq 47\mu F$</td></tr><tr><td>6.3V: 0201$\geq 0.1\mu F$; 0402$\geq 1\mu F$; 0603$\geq 4.7\mu F$; 0805$\geq 47\mu F$; 1206$\geq 10\mu F$</td></tr><tr><td>4V: 0603$\geq 22\mu F$; 0805$\geq 47\mu F$; 1206$\geq 100\mu F$</td></tr></table>	Rated voltage	Insulation Resistance	100V: 1210 $\geq 3.3\mu F$	$RxC \geq 50 \Omega \cdot F$.	50V: 0402 $\geq 0.1\mu F$; 0603 $\geq 2.2\mu F$; 0805 $\geq 10\mu F$; 1206 $\geq 10\mu F$	35V: 0603 $\geq 1\mu F$;	25V: 0201 $\geq 0.1\mu F$; 0402 $\geq 2.2\mu F$; 0603 $\geq 10\mu F$; 0805 $\geq 10\mu F$; 1206 $\geq 22\mu F$	16V: 0603 $\geq 10\mu F$; 0402 $\geq 1\mu F$; 0201 $\geq 0.22\mu F$	10V: 0201 $\geq 0.1\mu F$; 0402 $\geq 1\mu F$; 0603 $\geq 10\mu F$; 0805 $\geq 47\mu F$	6.3V: 0201 $\geq 0.1\mu F$; 0402 $\geq 1\mu F$; 0603 $\geq 4.7\mu F$; 0805 $\geq 47\mu F$; 1206 $\geq 10\mu F$	4V: 0603 $\geq 22\mu F$; 0805 $\geq 47\mu F$; 1206 $\geq 100\mu F$	Rated voltage: To apply rated voltage (500V max.) for 60 sec. 200~630V	$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$ whichever is smaller	Rated voltage: To apply 500V for 60 sec. $\geq 630V$		6.	Temperature Coefficient	With no electrical load.	<table><tr><th>T.C.</th><th>Operating Temp</th><th>T.C.</th><th>Capacitance Change</th></tr><tr><td>NPO</td><td>-55~125°C at 25°C</td><td>NPO</td><td>Within $\pm 30ppm/^{\circ}C$</td></tr><tr><td>X7R</td><td>-55~125°C at 25°C</td><td>X7R</td><td>Within $\pm 15\%$</td></tr><tr><td>X5R</td><td>-55~ 85°C at 25°C</td><td>X5R</td><td>Within $\pm 15\%$</td></tr></table>	T.C.	Operating Temp	T.C.	Capacitance Change	NPO	-55~125°C at 25°C	NPO	Within $\pm 30ppm/^{\circ}C$	X7R	-55~125°C at 25°C	X7R	Within $\pm 15\%$	X5R	-55~ 85°C at 25°C	X5R	Within $\pm 15\%$	*Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24 $\pm$ 2 hrs at room temp. * Measurement voltage for Class II:		<table><tr><th>01005</th><th>0201</th></tr><tr><td>Cap$\leq 0.01\mu F$: 0.5V</td><td>Cap$\leq 0.1\mu F$: 1V</td></tr><tr><td>Cap$> 0.01\mu F$: 0.2V</td><td>0.1$\mu F \leq$ Cap$< 1\mu F$: 0.2V*</td></tr><tr><td></td><td>Cap$\geq 1\mu F$: 0.1V*</td></tr><tr><td>*0201X104/6.3V~25V: 0.5V 0201X224/10V~25V: 0.5V 0201X474/10V: 0.5V</td><td>*0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V</td></tr><tr><th>0402</th><th>0603</th></tr><tr><td>Cap$< 1\mu F$: 1V</td><td>Cap$< 1\mu F$: 1V</td></tr><tr><td>Cap=1μF: 0.5V** 0402B224-16V: 0.5V 0402B334/474-6.3V&10V: 0.5V 0402S334/474-6.3V: 0.5V 0402X225/475-6.3V: 0.5V</td><td>1$\mu F \leq$ Cap$\leq 4.7\mu F$: 0.5V 0603X106-10V: 0.5V</td></tr><tr><td>1$\mu F <$ Cap$< 10\mu F$: 0.2V **0402B105M6R3V: 0.2V</td><td>Cap$> 4.7\mu F$: 0.2V</td></tr><tr><td>Cap$\geq 10\mu F$: 0.1V</td><td></td></tr><tr><th>0805</th><th>1206/1210</th></tr><tr><td>Cap$< 10\mu F$: 1V</td><td>Cap$\leq 10\mu F$: 1V</td></tr><tr><td>Cap=10μF: 0.5V 0805B475/6.3V~25V: 0.5V</td><td>10$\mu F <$ Cap$\leq 100\mu F$: 0.5V</td></tr><tr><td>Cap$> 10\mu F$: 0.2V</td><td>Cap$> 100\mu F$: 0.2V 1206X107-6.3V: 0.2V 1210S107-6.3V: 0.2V</td></tr></table>	01005	0201	Cap $\leq 0.01\mu F$: 0.5V	Cap $\leq 0.1\mu F$: 1V	Cap $> 0.01\mu F$: 0.2V	0.1 $\mu F \leq$ Cap $< 1\mu F$: 0.2V*		Cap $\geq 1\mu F$: 0.1V*	*0201X104/6.3V~25V: 0.5V 0201X224/10V~25V: 0.5V 0201X474/10V: 0.5V	*0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V	0402	0603	Cap $< 1\mu F$: 1V	Cap $< 1\mu F$: 1V	Cap=1 μF : 0.5V** 0402B224-16V: 0.5V 0402B334/474-6.3V&10V: 0.5V 0402S334/474-6.3V: 0.5V 0402X225/475-6.3V: 0.5V	1 $\mu F \leq$ Cap $\leq 4.7\mu F$: 0.5V 0603X106-10V: 0.5V	1 $\mu F <$ Cap $< 10\mu F$: 0.2V **0402B105M6R3V: 0.2V	Cap $> 4.7\mu F$: 0.2V	Cap $\geq 10\mu F$: 0.1V		0805	1206/1210	Cap $< 10\mu F$: 1V	Cap $\leq 10\mu F$: 1V	Cap=10 μF : 0.5V 0805B475/6.3V~25V: 0.5V	10 $\mu F <$ Cap $\leq 100\mu F$: 0.5V	Cap $> 10\mu F$: 0.2V	Cap $> 100\mu F$: 0.2V 1206X107-6.3V: 0.2V 1210S107-6.3V: 0.2V
			Rated voltage	Insulation Resistance																																																																												
			100V: All X7R	10GΩ or $RxC \geq 100 \Omega \cdot F$ whichever is smaller.																																																																												
			50V: 0402 $\geq 0.01\mu F$; 0603 $\geq 1\mu F$; 0805 $\geq 1\mu F$; 1206 $\geq 4.7\mu F$; 1210 $\geq 4.7\mu F$																																																																													
			35V: 0805 $\geq 2.2\mu F$; 1206 $\geq 2.2\mu F$; 1210 $\geq 10\mu F$																																																																													
			25V: 0402 $\geq 1\mu F$; 0603 $\geq 2.2\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 10\mu F$; 1210 $\geq 10\mu F$																																																																													
			16V: 0201 $\geq 0.1\mu F$; 0402 $\geq 0.22\mu F$; 0603 $\geq 1\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 10\mu F$; 1210 $\geq 47\mu F$																																																																													
			10V: 0201 $\geq 47nF$; 0402 $\geq 0.47\mu F$; 0603 $\geq 0.47\mu F$; 0805 $\geq 2.2\mu F$; 1206 $\geq 4.7\mu F$; 1210 $\geq 47\mu F$																																																																													
			6.3V ; 4V ; Size ≥ 1812																																																																													
<table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: 1210$\geq 3.3\mu F$</td><td rowspan="7">$RxC \geq 50 \Omega \cdot F$.</td></tr><tr><td>50V: 0402$\geq 0.1\mu F$; 0603$\geq 2.2\mu F$; 0805$\geq 10\mu F$; 1206$\geq 10\mu F$</td></tr><tr><td>35V: 0603$\geq 1\mu F$;</td></tr><tr><td>25V: 0201$\geq 0.1\mu F$; 0402$\geq 2.2\mu F$; 0603$\geq 10\mu F$; 0805$\geq 10\mu F$; 1206$\geq 22\mu F$</td></tr><tr><td>16V: 0603$\geq 10\mu F$; 0402$\geq 1\mu F$; 0201$\geq 0.22\mu F$</td></tr><tr><td>10V: 0201$\geq 0.1\mu F$; 0402$\geq 1\mu F$; 0603$\geq 10\mu F$; 0805$\geq 47\mu F$</td></tr><tr><td>6.3V: 0201$\geq 0.1\mu F$; 0402$\geq 1\mu F$; 0603$\geq 4.7\mu F$; 0805$\geq 47\mu F$; 1206$\geq 10\mu F$</td></tr><tr><td>4V: 0603$\geq 22\mu F$; 0805$\geq 47\mu F$; 1206$\geq 100\mu F$</td></tr></table>	Rated voltage	Insulation Resistance	100V: 1210 $\geq 3.3\mu F$	$RxC \geq 50 \Omega \cdot F$.	50V: 0402 $\geq 0.1\mu F$; 0603 $\geq 2.2\mu F$; 0805 $\geq 10\mu F$; 1206 $\geq 10\mu F$	35V: 0603 $\geq 1\mu F$;	25V: 0201 $\geq 0.1\mu F$; 0402 $\geq 2.2\mu F$; 0603 $\geq 10\mu F$; 0805 $\geq 10\mu F$; 1206 $\geq 22\mu F$	16V: 0603 $\geq 10\mu F$; 0402 $\geq 1\mu F$; 0201 $\geq 0.22\mu F$	10V: 0201 $\geq 0.1\mu F$; 0402 $\geq 1\mu F$; 0603 $\geq 10\mu F$; 0805 $\geq 47\mu F$	6.3V: 0201 $\geq 0.1\mu F$; 0402 $\geq 1\mu F$; 0603 $\geq 4.7\mu F$; 0805 $\geq 47\mu F$; 1206 $\geq 10\mu F$	4V: 0603 $\geq 22\mu F$; 0805 $\geq 47\mu F$; 1206 $\geq 100\mu F$																																																																					
Rated voltage	Insulation Resistance																																																																															
100V: 1210 $\geq 3.3\mu F$	$RxC \geq 50 \Omega \cdot F$.																																																																															
50V: 0402 $\geq 0.1\mu F$; 0603 $\geq 2.2\mu F$; 0805 $\geq 10\mu F$; 1206 $\geq 10\mu F$																																																																																
35V: 0603 $\geq 1\mu F$;																																																																																
25V: 0201 $\geq 0.1\mu F$; 0402 $\geq 2.2\mu F$; 0603 $\geq 10\mu F$; 0805 $\geq 10\mu F$; 1206 $\geq 22\mu F$																																																																																
16V: 0603 $\geq 10\mu F$; 0402 $\geq 1\mu F$; 0201 $\geq 0.22\mu F$																																																																																
10V: 0201 $\geq 0.1\mu F$; 0402 $\geq 1\mu F$; 0603 $\geq 10\mu F$; 0805 $\geq 47\mu F$																																																																																
6.3V: 0201 $\geq 0.1\mu F$; 0402 $\geq 1\mu F$; 0603 $\geq 4.7\mu F$; 0805 $\geq 47\mu F$; 1206 $\geq 10\mu F$																																																																																
4V: 0603 $\geq 22\mu F$; 0805 $\geq 47\mu F$; 1206 $\geq 100\mu F$																																																																																
Rated voltage: To apply rated voltage (500V max.) for 60 sec. 200~630V	$\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$ whichever is smaller																																																																															
Rated voltage: To apply 500V for 60 sec. $\geq 630V$																																																																																
6.	Temperature Coefficient	With no electrical load.	<table><tr><th>T.C.</th><th>Operating Temp</th><th>T.C.</th><th>Capacitance Change</th></tr><tr><td>NPO</td><td>-55~125°C at 25°C</td><td>NPO</td><td>Within $\pm 30ppm/^{\circ}C$</td></tr><tr><td>X7R</td><td>-55~125°C at 25°C</td><td>X7R</td><td>Within $\pm 15\%$</td></tr><tr><td>X5R</td><td>-55~ 85°C at 25°C</td><td>X5R</td><td>Within $\pm 15\%$</td></tr></table>	T.C.	Operating Temp	T.C.	Capacitance Change	NPO	-55~125°C at 25°C	NPO	Within $\pm 30ppm/^{\circ}C$	X7R	-55~125°C at 25°C	X7R	Within $\pm 15\%$	X5R	-55~ 85°C at 25°C	X5R	Within $\pm 15\%$																																																													
			T.C.	Operating Temp	T.C.	Capacitance Change																																																																										
			NPO	-55~125°C at 25°C	NPO	Within $\pm 30ppm/^{\circ}C$																																																																										
			X7R	-55~125°C at 25°C	X7R	Within $\pm 15\%$																																																																										
			X5R	-55~ 85°C at 25°C	X5R	Within $\pm 15\%$																																																																										
			*Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24 $\pm$ 2 hrs at room temp. * Measurement voltage for Class II:																																																																													
			<table><tr><th>01005</th><th>0201</th></tr><tr><td>Cap$\leq 0.01\mu F$: 0.5V</td><td>Cap$\leq 0.1\mu F$: 1V</td></tr><tr><td>Cap$> 0.01\mu F$: 0.2V</td><td>0.1$\mu F \leq$ Cap$< 1\mu F$: 0.2V*</td></tr><tr><td></td><td>Cap$\geq 1\mu F$: 0.1V*</td></tr><tr><td>*0201X104/6.3V~25V: 0.5V 0201X224/10V~25V: 0.5V 0201X474/10V: 0.5V</td><td>*0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V</td></tr><tr><th>0402</th><th>0603</th></tr><tr><td>Cap$< 1\mu F$: 1V</td><td>Cap$< 1\mu F$: 1V</td></tr><tr><td>Cap=1μF: 0.5V** 0402B224-16V: 0.5V 0402B334/474-6.3V&10V: 0.5V 0402S334/474-6.3V: 0.5V 0402X225/475-6.3V: 0.5V</td><td>1$\mu F \leq$ Cap$\leq 4.7\mu F$: 0.5V 0603X106-10V: 0.5V</td></tr><tr><td>1$\mu F <$ Cap$< 10\mu F$: 0.2V **0402B105M6R3V: 0.2V</td><td>Cap$> 4.7\mu F$: 0.2V</td></tr><tr><td>Cap$\geq 10\mu F$: 0.1V</td><td></td></tr><tr><th>0805</th><th>1206/1210</th></tr><tr><td>Cap$< 10\mu F$: 1V</td><td>Cap$\leq 10\mu F$: 1V</td></tr><tr><td>Cap=10μF: 0.5V 0805B475/6.3V~25V: 0.5V</td><td>10$\mu F <$ Cap$\leq 100\mu F$: 0.5V</td></tr><tr><td>Cap$> 10\mu F$: 0.2V</td><td>Cap$> 100\mu F$: 0.2V 1206X107-6.3V: 0.2V 1210S107-6.3V: 0.2V</td></tr></table>	01005	0201	Cap $\leq 0.01\mu F$: 0.5V	Cap $\leq 0.1\mu F$: 1V	Cap $> 0.01\mu F$: 0.2V	0.1 $\mu F \leq$ Cap $< 1\mu F$: 0.2V*		Cap $\geq 1\mu F$: 0.1V*	*0201X104/6.3V~25V: 0.5V 0201X224/10V~25V: 0.5V 0201X474/10V: 0.5V	*0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V	0402	0603	Cap $< 1\mu F$: 1V	Cap $< 1\mu F$: 1V	Cap=1 μF : 0.5V** 0402B224-16V: 0.5V 0402B334/474-6.3V&10V: 0.5V 0402S334/474-6.3V: 0.5V 0402X225/475-6.3V: 0.5V	1 $\mu F \leq$ Cap $\leq 4.7\mu F$: 0.5V 0603X106-10V: 0.5V	1 $\mu F <$ Cap $< 10\mu F$: 0.2V **0402B105M6R3V: 0.2V	Cap $> 4.7\mu F$: 0.2V	Cap $\geq 10\mu F$: 0.1V		0805	1206/1210	Cap $< 10\mu F$: 1V	Cap $\leq 10\mu F$: 1V	Cap=10 μF : 0.5V 0805B475/6.3V~25V: 0.5V	10 $\mu F <$ Cap $\leq 100\mu F$: 0.5V	Cap $> 10\mu F$: 0.2V	Cap $> 100\mu F$: 0.2V 1206X107-6.3V: 0.2V 1210S107-6.3V: 0.2V																																																	
			01005	0201																																																																												
			Cap $\leq 0.01\mu F$: 0.5V	Cap $\leq 0.1\mu F$: 1V																																																																												
			Cap $> 0.01\mu F$: 0.2V	0.1 $\mu F \leq$ Cap $< 1\mu F$: 0.2V*																																																																												
	Cap $\geq 1\mu F$: 0.1V*																																																																															
*0201X104/6.3V~25V: 0.5V 0201X224/10V~25V: 0.5V 0201X474/10V: 0.5V	*0201S104/6.3V~16V: 0.3V 0201S224/6.3V: 0.3V 0201X105/6.3V&10V: 0.3V																																																																															
0402	0603																																																																															
Cap $< 1\mu F$: 1V	Cap $< 1\mu F$: 1V																																																																															
Cap=1 μF : 0.5V** 0402B224-16V: 0.5V 0402B334/474-6.3V&10V: 0.5V 0402S334/474-6.3V: 0.5V 0402X225/475-6.3V: 0.5V	1 $\mu F \leq$ Cap $\leq 4.7\mu F$: 0.5V 0603X106-10V: 0.5V																																																																															
1 $\mu F <$ Cap $< 10\mu F$: 0.2V **0402B105M6R3V: 0.2V	Cap $> 4.7\mu F$: 0.2V																																																																															
Cap $\geq 10\mu F$: 0.1V																																																																																
0805	1206/1210																																																																															
Cap $< 10\mu F$: 1V	Cap $\leq 10\mu F$: 1V																																																																															
Cap=10 μF : 0.5V 0805B475/6.3V~25V: 0.5V	10 $\mu F <$ Cap $\leq 100\mu F$: 0.5V																																																																															
Cap $> 10\mu F$: 0.2V	Cap $> 100\mu F$: 0.2V 1206X107-6.3V: 0.2V 1210S107-6.3V: 0.2V																																																																															

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	Item	Test Condition	Requirements															
7.	Adhesive Strength of Termination	* Pressurizing force : 2N (0201) and 5N (≤0603) and 10N (>0603) * Test time: 10±1 sec.	* No remarkable damage or removal of the terminations.															
8.	Vibration Resistance	* Vibration frequency: 10~55 Hz/min. * Total amplitude: 1.5mm * Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.) * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap./DF(Q) Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap change and Q/D.F.: To meet initial spec.															
9.	Solderability	* Solder temperature: 235±5°C * Dipping time: 2±0.5 sec.	* 95% min. coverage of all metalized area.															
10.	Bending Test	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm and then the pressure shall be maintained for 5±1 sec. * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change : NP0: within ±5% or 0.5pF whichever is larger X7R, X5R: within ±12.5% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)															
11.	Resistance to Soldering Heat	* Solder temperature: 260±5°C * Dipping time: 10±1 sec * Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder. * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap change: NP0: within ±2.5% or 0.25pF whichever is larger X7R, X5R: within ±7.5% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. * 25% max. leaching on each edge.															
12.	Temperature Cycle	* Conduct the five cycles according to the temperatures and time. <table><tr><th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr><tr><td>1</td><td>Min. operating temp. +0/-3</td><td>30±3</td></tr><tr><td>2</td><td>Room temp.</td><td>2~3</td></tr><tr><td>3</td><td>Max. operating temp. +3/-0</td><td>30±3</td></tr><tr><td>4</td><td>Room temp.</td><td>2~3</td></tr></table> * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	Step	Temp. (°C)	Time (min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2~3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2~3	* No remarkable damage. * Cap change : NP0: within ±2.5% or 0.25pF whichever is larger X7R, X5R: within ±7.5% * Q/D.F., I.R. and dielectric strength: To meet initial requirements.
Step	Temp. (°C)	Time (min.)																
1	Min. operating temp. +0/-3	30±3																
2	Room temp.	2~3																
3	Max. operating temp. +3/-0	30±3																
4	Room temp.	2~3																

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

No.	Item	Test Condition	Requirements																																															
13.	Humidity (Damp Heat) Steady State	*Test temp.: 40±2°C *Humidity: 90~95%RH *Test time: 500+24/-0hrs. *Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. *Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at ro0om temp.	* No remarkable damage. * Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X5R: ≥10V**,within ±12.5%; ≤6.3V within ±25%; **10V: 0603 ≥ 4.7μF;0402 ≥ 1μF;0201 ≥ 0.1μF, within ±25%; * Q/D.F. value: NP0: More than 30pF Q≥350, 10pF≤C<30pF, Q≥275+2.5C Less than 10pF Q≥200+10C X7R, X5R: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="5">100V</td><td rowspan="5">≤3%</td><td>≤6% 1206 ≥ 0.47μF</td></tr><tr><td>≤7% 1812 ≥ 4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr><tr><td>≤7.5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF</td></tr><tr><td>≤20% 0805 > 0.22μF;1210 ≥ 3.3μF</td></tr><tr><td>≤6% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF</td></tr><tr><td rowspan="5">50V</td><td rowspan="5">≤3%</td><td>≤7% 1812 ≥ 4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF</td></tr><tr><td>≤10% 0201 ≥ 0.01uF;1210 ≥ 3.3μF</td></tr><tr><td>≤20% 0402 ≥ 0.012μF;0603>0.1μF;0805 ≥ 1μF(0805/X7R>0.47μF); 1206 ≥ 2.2μF;1210 ≥ 10μF;</td></tr><tr><td>≤5% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF</td></tr><tr><td>≤10% 0201 ≥ 0.01μF(0201/X5R=0.01μF);0805 ≥ 1μF;1210 ≥ 10μF*</td></tr><tr><td rowspan="5">25V</td><td rowspan="5">≤5%</td><td>≤14% 0603 ≥ 0.33μF</td></tr><tr><td>≤15% 0201 ≥ 0.1μF(0201/X5R>0.01μF); 0603 ≥ 0.47μF;TTseries 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF);0805 ≥ 2.2μF; 1206 ≥ 4.7μF;1210 ≥ 22μF(1210/X5R ≥ 10μF)*;</td></tr><tr><td>≤20% 0402 ≥ 0.33μF</td></tr><tr><td>≤10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF</td></tr><tr><td>≤15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF);0402 ≥ 0.033μF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF</td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≤5%</td><td>≤15% 0201 ≥ 0.012μF;0402 ≥ 0.22μF (0402/X7R ≥ 0.15μF); 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF</td></tr><tr><td>≤20% 0201 ≥ 0.1μF;0402 ≥ 1μF;0603/X5R ≥ 10μF;01R5/X5R</td></tr><tr><td>10V</td><td>≤7.5%</td><td>≤15% 0201 ≥ 0.1μF;0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF;0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF</td></tr><tr><td>6.3V</td><td>≤15%</td><td>≤30%</td></tr><tr><td>4V</td><td>≤20%</td><td>---</td></tr></table> *I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X5R) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="7">1GΩ or Rx≥ 10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V:0603≥1μF;0805≥2.2μF; 1206 ≥ 2.2μF;1210 ≥ 10μF</td></tr><tr><td>25V:0201 ≥ 0.1uF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF</td></tr><tr><td>16V: 0201 ≥ 0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF</td></tr><tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V ; 4V ; Size≥1812</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤	100V	≤3%	≤6% 1206 ≥ 0.47μF	≤7% 1812 ≥ 4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF	≤7.5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF	≤20% 0805 > 0.22μF;1210 ≥ 3.3μF	≤6% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF	50V	≤3%	≤7% 1812 ≥ 4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF	≤10% 0201 ≥ 0.01uF;1210 ≥ 3.3μF	≤20% 0402 ≥ 0.012μF;0603>0.1μF;0805 ≥ 1μF(0805/X7R>0.47μF); 1206 ≥ 2.2μF;1210 ≥ 10μF;	≤5% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF	≤10% 0201 ≥ 0.01μF(0201/X5R=0.01μF);0805 ≥ 1μF;1210 ≥ 10μF*	25V	≤5%	≤14% 0603 ≥ 0.33μF	≤15% 0201 ≥ 0.1μF(0201/X5R>0.01μF); 0603 ≥ 0.47μF;TTseries 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF);0805 ≥ 2.2μF; 1206 ≥ 4.7μF;1210 ≥ 22μF(1210/X5R ≥ 10μF)*;	≤20% 0402 ≥ 0.33μF	≤10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF	≤15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF);0402 ≥ 0.033μF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF	16V	≤5%	≤15% 0201 ≥ 0.012μF;0402 ≥ 0.22μF (0402/X7R ≥ 0.15μF); 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF	≤20% 0201 ≥ 0.1μF;0402 ≥ 1μF;0603/X5R ≥ 10μF;01R5/X5R	10V	≤7.5%	≤15% 0201 ≥ 0.1μF;0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF;0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF	6.3V	≤15%	≤30%	4V	≤20%	---	Rated voltage	Insulation Resistance	100V: All X7R;1210≥3.3μF	1GΩ or Rx≥ 10 Ω-F whichever is smaller.	50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V:0603≥1μF;0805≥2.2μF; 1206 ≥ 2.2μF;1210 ≥ 10μF	25V:0201 ≥ 0.1uF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF	16V: 0201 ≥ 0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF	6.3V ; 4V ; Size≥1812
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																
100V	≤3%	≤6% 1206 ≥ 0.47μF																																																
		≤7% 1812 ≥ 4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF																																																
		≤7.5% 0603 ≥ 0.068μF;0805 > 0.1μF;1206 ≥ 1μF;1210 ≥ 2.2μF																																																
		≤20% 0805 > 0.22μF;1210 ≥ 3.3μF																																																
		≤6% 0201(50V);0603 ≥ 0.047μF;0805 ≥ 0.18μF;1206 ≥ 0.47μF																																																
50V	≤3%	≤7% 1812 ≥ 4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF																																																
		≤10% 0201 ≥ 0.01uF;1210 ≥ 3.3μF																																																
		≤20% 0402 ≥ 0.012μF;0603>0.1μF;0805 ≥ 1μF(0805/X7R>0.47μF); 1206 ≥ 2.2μF;1210 ≥ 10μF;																																																
		≤5% 0603 ≥ 1μF;0805≥2.2μF;1206 ≥ 2.2μF;1210 ≥ 10μF																																																
		≤10% 0201 ≥ 0.01μF(0201/X5R=0.01μF);0805 ≥ 1μF;1210 ≥ 10μF*																																																
25V	≤5%	≤14% 0603 ≥ 0.33μF																																																
		≤15% 0201 ≥ 0.1μF(0201/X5R>0.01μF); 0603 ≥ 0.47μF;TTseries 0402 ≥ 0.10μF(0402/X7R ≥ 0.056μF);0805 ≥ 2.2μF; 1206 ≥ 4.7μF;1210 ≥ 22μF(1210/X5R ≥ 10μF)*;																																																
		≤20% 0402 ≥ 0.33μF																																																
		≤10% 0603 ≥ 0.15μF;0805 ≥ 0.68μF;1206 ≥ 2.2μF;1210 ≥ 4.7μF																																																
		≤15% 0201 ≥ 0.01μF(0201/X7R ≥ 0.022μF);0402 ≥ 0.033μF; 0603>0.47μF;0805 ≥ 2.2μF;1206 ≥ 4.7μF;1210 ≥ 22μF																																																
16V	≤5%	≤15% 0201 ≥ 0.012μF;0402 ≥ 0.22μF (0402/X7R ≥ 0.15μF); 0603 ≥ 0.33μF;0805 ≥ 2.2μF;1206 ≥ 2.2μF;1210 ≥ 22μF																																																
		≤20% 0201 ≥ 0.1μF;0402 ≥ 1μF;0603/X5R ≥ 10μF;01R5/X5R																																																
10V	≤7.5%	≤15% 0201 ≥ 0.1μF;0402 ≥ 1μF(0402/X6S ≥ 0.47μF); 0603 ≥ 10μF;0805 ≥ 4.7μF;1206 ≥ 47μF;1210 ≥ 100μF																																																
6.3V	≤15%	≤30%																																																
4V	≤20%	---																																																
Rated voltage	Insulation Resistance																																																	
100V: All X7R;1210≥3.3μF	1GΩ or Rx≥ 10 Ω-F whichever is smaller.																																																	
50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																																		
35V:0603≥1μF;0805≥2.2μF; 1206 ≥ 2.2μF;1210 ≥ 10μF																																																		
25V:0201 ≥ 0.1uF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF																																																		
16V: 0201 ≥ 0.1uF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF																																																		
10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF																																																		
6.3V ; 4V ; Size≥1812																																																		

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.


Multilayer Ceramic Capacitors

No	Item	Test Condition	Requirements																																													
14	Humidity (Damp Heat) Load	*Test temp. : 40±2°C *Humidity : 90~95%RH *Test time : 500+24/-0 hrs. *To apply voltage : Rated voltage (MAX. 500V) *Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. Cap change: NP0: ±7.5% or 0.75pF whichever is larger. X7R, X5R: ≥10V**, within ±12.5%; ≤ 6.3V within ±25%; **10V: 0603 ≥ 4.7μF; 0402 ≥ 1μF; 0201 ≥ 0.1μF, within ±25%; Q/D.F. value: NP0: C≥30pF, Q≥200; C<30pF, Q≥100+10/3C X7R, X5R: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td rowspan="4">100V</td><td rowspan="4">≤ 3%</td><td>≤ 6% 1206 ≥ 0.47μF</td></tr><tr><td>≤ 7% 1812 ≥ 4.7μF; 1825 ≥ 4.7μF; 2220 ≥ 4.7μF; 2225 ≥ 4.7μF</td></tr><tr><td>≤ 7.5% 0603 ≥ 0.068μF; 0805 ≥ 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF</td></tr><tr><td>≤ 20% 0805 ≥ 0.22μF; 1210 ≥ 3.3μF</td></tr><tr><td rowspan="4">50V</td><td rowspan="4">≤ 3%</td><td>≤ 6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF</td></tr><tr><td>≤ 7% 1812 ≥ 4.7μF; 1825 ≥ 4.7μF; 2220 ≥ 4.7μF; 2225 ≥ 4.7μF</td></tr><tr><td>≤ 10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF</td></tr><tr><td>≤ 20% 0402 ≥ 0.012μF; 0603 ≥ 0.1μF; 0805 ≥ 1μF (0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF;</td></tr><tr><td>35V</td><td>≤ 5%</td><td>≤ 20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≤ 5%</td><td>≤ 10% 0201 ≥ 0.01μF (0201/X5R = 0.01μF); 0805 ≥ 1μF; 1210 ≥ 10μF*</td></tr><tr><td>≤ 14% 0603 ≥ 0.33μF</td></tr><tr><td>≤ 15% 0201 ≥ 0.1μF (0201/X5R > 0.01μF); 0603 ≥ 0.47μF; TTseries 0402 ≥ 0.10μF (0402/X7R ≥ 0.056μF); 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF (1210/X5R ≥ 10μF)*;</td></tr><tr><td>≤ 20% 0402 ≥ 0.33μF</td></tr><tr><td>16V</td><td>≤ 5%</td><td>≤ 10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤ 7.5%</td><td>≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.22μF (0402/X7R ≥ 0.15μF); 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF</td></tr><tr><td>≤ 20% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603/X5R ≥ 10μF; 01R5/X5R</td></tr><tr><td>≤ 30% 0201 ≥ 0.1μF; 0402 ≥ 1μF (0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 4.7μF; 1210 ≥ 100μF</td></tr><tr><td>4V</td><td>≤ 20%</td><td>---</td></tr></table> *I.R.: ≥10V, 500MΩ or 25 Ω-F whichever is smaller. Class II (X7R, X5R) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: All X7R; 1210 ≥ 3.3μF</td><td rowspan="7">500MΩ or RxC ≥ 5 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF</td></tr><tr><td>35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF</td></tr><tr><td>25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF</td></tr><tr><td>16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 4.7μF</td></tr><tr><td>10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF</td></tr><tr><td>6.3V ; 4V ; Size ≥ 1812</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤	100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF	≤ 7% 1812 ≥ 4.7μF; 1825 ≥ 4.7μF; 2220 ≥ 4.7μF; 2225 ≥ 4.7μF	≤ 7.5% 0603 ≥ 0.068μF; 0805 ≥ 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF	≤ 20% 0805 ≥ 0.22μF; 1210 ≥ 3.3μF	50V	≤ 3%	≤ 6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF	≤ 7% 1812 ≥ 4.7μF; 1825 ≥ 4.7μF; 2220 ≥ 4.7μF; 2225 ≥ 4.7μF	≤ 10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF	≤ 20% 0402 ≥ 0.012μF; 0603 ≥ 0.1μF; 0805 ≥ 1μF (0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF;	35V	≤ 5%	≤ 20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	25V	≤ 5%	≤ 10% 0201 ≥ 0.01μF (0201/X5R = 0.01μF); 0805 ≥ 1μF; 1210 ≥ 10μF*	≤ 14% 0603 ≥ 0.33μF	≤ 15% 0201 ≥ 0.1μF (0201/X5R > 0.01μF); 0603 ≥ 0.47μF; TTseries 0402 ≥ 0.10μF (0402/X7R ≥ 0.056μF); 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF (1210/X5R ≥ 10μF)*;	≤ 20% 0402 ≥ 0.33μF	16V	≤ 5%	≤ 10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF	10V	≤ 7.5%	≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.22μF (0402/X7R ≥ 0.15μF); 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF	≤ 20% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603/X5R ≥ 10μF; 01R5/X5R	≤ 30% 0201 ≥ 0.1μF; 0402 ≥ 1μF (0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 4.7μF; 1210 ≥ 100μF	4V	≤ 20%	---	Rated voltage	Insulation Resistance	100V: All X7R; 1210 ≥ 3.3μF	500MΩ or RxC ≥ 5 Ω-F whichever is smaller.	50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF	35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF	25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF	16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 4.7μF	10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF	6.3V ; 4V ; Size ≥ 1812
Rated vol.	D.F. ≤	Exception of D.F. ≤																																														
100V	≤ 3%	≤ 6% 1206 ≥ 0.47μF																																														
		≤ 7% 1812 ≥ 4.7μF; 1825 ≥ 4.7μF; 2220 ≥ 4.7μF; 2225 ≥ 4.7μF																																														
		≤ 7.5% 0603 ≥ 0.068μF; 0805 ≥ 0.1μF; 1206 ≥ 1μF; 1210 ≥ 2.2μF																																														
		≤ 20% 0805 ≥ 0.22μF; 1210 ≥ 3.3μF																																														
50V	≤ 3%	≤ 6% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF																																														
		≤ 7% 1812 ≥ 4.7μF; 1825 ≥ 4.7μF; 2220 ≥ 4.7μF; 2225 ≥ 4.7μF																																														
		≤ 10% 0201 ≥ 0.01uF; 1210 ≥ 3.3μF																																														
		≤ 20% 0402 ≥ 0.012μF; 0603 ≥ 0.1μF; 0805 ≥ 1μF (0805/X7R > 0.47μF); 1206 ≥ 2.2μF; 1210 ≥ 10μF;																																														
35V	≤ 5%	≤ 20% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																														
25V	≤ 5%	≤ 10% 0201 ≥ 0.01μF (0201/X5R = 0.01μF); 0805 ≥ 1μF; 1210 ≥ 10μF*																																														
		≤ 14% 0603 ≥ 0.33μF																																														
		≤ 15% 0201 ≥ 0.1μF (0201/X5R > 0.01μF); 0603 ≥ 0.47μF; TTseries 0402 ≥ 0.10μF (0402/X7R ≥ 0.056μF); 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF (1210/X5R ≥ 10μF)*;																																														
		≤ 20% 0402 ≥ 0.33μF																																														
16V	≤ 5%	≤ 10% 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF																																														
10V	≤ 7.5%	≤ 15% 0201 ≥ 0.012μF; 0402 ≥ 0.22μF (0402/X7R ≥ 0.15μF); 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF																																														
		≤ 20% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603/X5R ≥ 10μF; 01R5/X5R																																														
		≤ 30% 0201 ≥ 0.1μF; 0402 ≥ 1μF (0402/X6S ≥ 0.47μF); 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 4.7μF; 1210 ≥ 100μF																																														
4V	≤ 20%	---																																														
Rated voltage	Insulation Resistance																																															
100V: All X7R; 1210 ≥ 3.3μF	500MΩ or RxC ≥ 5 Ω-F whichever is smaller.																																															
50V: 0402 > 0.01μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF																																																
35V: 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF																																																
25V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 2.2μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 10μF																																																
16V: 0201 ≥ 0.1uF; 0402 ≥ 0.22μF; 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1206 ≥ 10μF; 1210 ≥ 4.7μF																																																
10V: 0201 ≥ 47nF; 0402 ≥ 0.47μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 4.7μF																																																
6.3V ; 4V ; Size ≥ 1812																																																

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

Approval Sheet

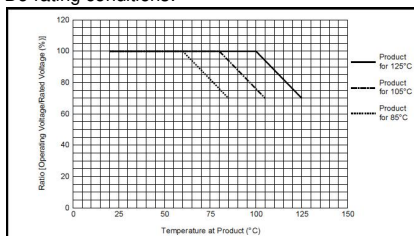No	Item	Test Condition	Requirements																																																																																																																																																																							
15.	High Temperature Load (Endurance)	*Test temp. : NP0, X7R: 125±3°C X5R: 85±3°C *Test time: 1000+24/-0 hrs. *To apply voltage: (1) 100% of rated voltage for below range. <table><tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capacitance</th></tr><tr><td>01R5</td><td>X5R</td><td>≤10V</td><td>C=0.1μF</td></tr><tr><td>0201</td><td>X5R/X7R</td><td>≤10V ≥16V</td><td>C≥0.1μF C>0.1μF</td></tr><tr><td>0402</td><td>X5R</td><td>≤16V 25V,50V</td><td>C>1.0μF C≥1.0μF</td></tr><tr><td>0603</td><td>X5R/X7R</td><td>6.3V,10V 4V</td><td>C≥4.7μF^{#1} C≥22μF</td></tr><tr><td>0805</td><td>X5R/X7R</td><td>6.3V 10V,50V</td><td>C≥1.0μF C≥10μF</td></tr><tr><td>1206</td><td>X5R/X7R</td><td>16V,25V</td><td>C≥10μF C≥22μF</td></tr><tr><td>1210</td><td>X5R/X7R</td><td>≤6.3V 16V</td><td>C≥47μF C≥47μF</td></tr><tr><td></td><td>X7R</td><td>100V</td><td>C≥3.3μF</td></tr></table> **1WV items must follow de-rating conditions. #1. 0603X106(10V)&0603S106(4V&6.3V):150% of rated voltage (2) 150% of rated voltage for below range. <table><tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capacitance</th></tr><tr><td>0201</td><td>X5R</td><td>16V,25V</td><td>C=0.1μF</td></tr><tr><td></td><td>X7R</td><td>16V</td><td>C≥0.022μF</td></tr><tr><td>0402</td><td>X7R/X5R</td><td>50V</td><td>C>0.01μF</td></tr><tr><td></td><td></td><td>10~25V</td><td>C≥0.22μF</td></tr><tr><td>0603</td><td>X5R</td><td>50V</td><td>C≥1.0μF</td></tr><tr><td></td><td>X7R</td><td>50V</td><td>C>0.1μF</td></tr><tr><td></td><td></td><td>25V</td><td>C=1.0μF</td></tr><tr><td>0805</td><td>X5R/X7R</td><td>10V,16V</td><td>C≥1.0μF</td></tr><tr><td></td><td></td><td>100V</td><td>C≥0.47μF</td></tr><tr><td></td><td></td><td>50V</td><td>C≥0.68μF</td></tr><tr><td></td><td></td><td>35V</td><td>C≥2.2μF</td></tr><tr><td></td><td></td><td>10~25V</td><td>C≥4.7μF</td></tr><tr><td>1206</td><td>X7R</td><td>100V</td><td>C≥1.0μF</td></tr><tr><td></td><td></td><td>50V</td><td>C≥2.2μF</td></tr><tr><td></td><td>X5R</td><td>100V</td><td>C>1.0μF</td></tr><tr><td></td><td></td><td>50V</td><td>C=4.7μF</td></tr><tr><td>1210</td><td>X5R/X7R</td><td>50V~100V</td><td>C≥2.2μF</td></tr><tr><td>1812</td><td>X7R</td><td>≤50V</td><td>C≥4.7μF</td></tr><tr><td></td><td></td><td>100V</td><td>C≥1.0μF</td></tr><tr><td>1825</td><td>X7R</td><td>100V~250V</td><td>C≥1.0μF</td></tr><tr><td>2220</td><td></td><td></td><td></td></tr><tr><td>2225</td><td></td><td></td><td></td></tr></table> (3) ≤6.3V or C≥10μF :150% of rated voltage. (4) 10V ≤ Ur < 250V: 200% of rated voltage. (5) 500V: 150% of rated voltage. (6) Ur ≥ 630V: 120% of rated voltage * Before initial measurement (Class II only): To apply de-aging at 150°C for 1hr then set for 24±2 hrs at room temp. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	Size	Dielectric	Rated voltage	Capacitance	01R5	X5R	≤10V	C=0.1μF	0201	X5R/X7R	≤10V ≥16V	C≥0.1μF C>0.1μF	0402	X5R	≤16V 25V,50V	C>1.0μF C≥1.0μF	0603	X5R/X7R	6.3V,10V 4V	C≥4.7μF ^{#1} C≥22μF	0805	X5R/X7R	6.3V 10V,50V	C≥1.0μF C≥10μF	1206	X5R/X7R	16V,25V	C≥10μF C≥22μF	1210	X5R/X7R	≤6.3V 16V	C≥47μF C≥47μF		X7R	100V	C≥3.3μF	Size	Dielectric	Rated voltage	Capacitance	0201	X5R	16V,25V	C=0.1μF		X7R	16V	C≥0.022μF	0402	X7R/X5R	50V	C>0.01μF			10~25V	C≥0.22μF	0603	X5R	50V	C≥1.0μF		X7R	50V	C>0.1μF			25V	C=1.0μF	0805	X5R/X7R	10V,16V	C≥1.0μF			100V	C≥0.47μF			50V	C≥0.68μF			35V	C≥2.2μF			10~25V	C≥4.7μF	1206	X7R	100V	C≥1.0μF			50V	C≥2.2μF		X5R	100V	C>1.0μF			50V	C=4.7μF	1210	X5R/X7R	50V~100V	C≥2.2μF	1812	X7R	≤50V	C≥4.7μF			100V	C≥1.0μF	1825	X7R	100V~250V	C≥1.0μF	2220				2225				* No remarkable damage. Cap change: NP0: ±3.0% or ±0.3pF whichever is larger X7R, X5R: ≥10V**, within ±12.5%; ≤6.3V within ±25%; **10V: 0603≥4.7μF;0402≥1μF;0201≥0.1μF, within ±25% Q/D.F. value: NP0: More than 30pF, Q≥350 10pF≤C<30pF, Q≥275+2.5C Less than 10pF, Q≥200+10C X7R, X5R: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td>100V</td><td>≤3%</td><td>≤6% 1206 ≥0.47μF ≤7% 1812 ≥4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF ≤7.5% 0603 ≥0.068μF;0805 >0.1μF;1206 ≥1μF;1210 ≥2.2μF ≤20% 0805 >0.22μF;1210 ≥3.3μF</td></tr><tr><td>50V</td><td>≤3%</td><td>≤6% 0201(50V);0603 ≥0.047μF;0805 ≥0.18μF;1206 ≥0.47μF ≤7% 1812 ≥4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF ≤10% 0201 ≥0.01μF;1210 ≥3.3μF</td></tr><tr><td>35V</td><td>≤5%</td><td>≤20% 0402 ≥0.012μF;0603>0.1μF;0805 ≥1μF(0805/X7R>0.47μF); 1206 ≥2.2μF;1210 ≥10μF; ≤10% 0603 ≥1μF;0805≥2.2μF;1206 ≥2.2μF;1210 ≥10μF ≤14% 0201 ≥0.01μF(0201/X5R=0.01μF);0805 ≥1μF;1210 ≥10μF*</td></tr><tr><td>25V</td><td>≤5%</td><td>≤15% 0201 ≥0.1μF(0201/X5R>0.01μF); 0603 ≥0.47μF;TTseries 0402 ≥0.10μF(0402/X7R ≥0.056μF);0805 ≥2.2μF; 1206 ≥4.7μF;1210 ≥22μF(1210/X5R ≥10μF)*; ≤20% 0402 ≥0.33μF</td></tr><tr><td>16V</td><td>≤5%</td><td>≤10% 0603 ≥0.15μF;0805 ≥0.68μF;1206 ≥2.2μF;1210 ≥4.7μF ≤15% 0201 ≥0.01μF(0201/X7R ≥0.022μF);0402 ≥0.033μF; 0603>0.47μF;0805 ≥2.2μF;1206 ≥4.7μF;1210 ≥22μF</td></tr><tr><td>10V</td><td>≤7.5%</td><td>≤15% 0201 ≥0.012μF;0402 ≥0.22μF (0402/X7R ≥0.15μF); 0603 ≥0.33μF;0805 ≥2.2μF;1206 ≥2.2μF;1210 ≥22μF ≤20% 0201 ≥0.1μF;0402 ≥1μF;0603/X5R ≥10μF;01R5/X5R</td></tr><tr><td>6.3V</td><td>≤15%</td><td>≤30% 0201 ≥0.1μF;0402 ≥1μF(0402/X6S ≥0.47μF); 0603 ≥10μF;0805 ≥4.7μF;1206 ≥47μF;1210 ≥100μF</td></tr><tr><td>4V</td><td>≤20%</td><td>---</td></tr></table> *I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X5R) <table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: All X7R;1210≥3.3μF</td><td rowspan="5">1GΩ or RxC ≥ 10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V:0603≥1μF;0805≥2.2μF; 1206≥2.2μF;1210 ≥10μF</td></tr><tr><td>25V:0201 ≥0.1μF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF</td></tr><tr><td>16V: 0201 ≥0.1μF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF</td></tr><tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td><td></td></tr><tr><td>6.3V ; 4V ; Size≥1812</td><td></td></tr></table> ** De-rating conditions:  The general MLCC products are designed for use in devices with a typical lifetime around 10 years. The general MLCC products are designed so that the useful lifetime can be extended longer than 10 years under the following conditions: 「80% of the rated voltage or less, Maximum operating temperature -20 degree C or less」 Extended useful lifetime, under specific operating conditions, can be estimated from the chart. ※The useful lifetime is the time when cumulative failure rate becomes 1%. ※Please note that the useful lifetime data is for reference only and not guaranteed.	Rated vol.	D.F. ≤	Exception of D.F. ≤	100V	≤3%	≤6% 1206 ≥0.47μF ≤7% 1812 ≥4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF ≤7.5% 0603 ≥0.068μF;0805 >0.1μF;1206 ≥1μF;1210 ≥2.2μF ≤20% 0805 >0.22μF;1210 ≥3.3μF	50V	≤3%	≤6% 0201(50V);0603 ≥0.047μF;0805 ≥0.18μF;1206 ≥0.47μF ≤7% 1812 ≥4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF ≤10% 0201 ≥0.01μF;1210 ≥3.3μF	35V	≤5%	≤20% 0402 ≥0.012μF;0603>0.1μF;0805 ≥1μF(0805/X7R>0.47μF); 1206 ≥2.2μF;1210 ≥10μF; ≤10% 0603 ≥1μF;0805≥2.2μF;1206 ≥2.2μF;1210 ≥10μF ≤14% 0201 ≥0.01μF(0201/X5R=0.01μF);0805 ≥1μF;1210 ≥10μF*	25V	≤5%	≤15% 0201 ≥0.1μF(0201/X5R>0.01μF); 0603 ≥0.47μF;TTseries 0402 ≥0.10μF(0402/X7R ≥0.056μF);0805 ≥2.2μF; 1206 ≥4.7μF;1210 ≥22μF(1210/X5R ≥10μF)*; ≤20% 0402 ≥0.33μF	16V	≤5%	≤10% 0603 ≥0.15μF;0805 ≥0.68μF;1206 ≥2.2μF;1210 ≥4.7μF ≤15% 0201 ≥0.01μF(0201/X7R ≥0.022μF);0402 ≥0.033μF; 0603>0.47μF;0805 ≥2.2μF;1206 ≥4.7μF;1210 ≥22μF	10V	≤7.5%	≤15% 0201 ≥0.012μF;0402 ≥0.22μF (0402/X7R ≥0.15μF); 0603 ≥0.33μF;0805 ≥2.2μF;1206 ≥2.2μF;1210 ≥22μF ≤20% 0201 ≥0.1μF;0402 ≥1μF;0603/X5R ≥10μF;01R5/X5R	6.3V	≤15%	≤30% 0201 ≥0.1μF;0402 ≥1μF(0402/X6S ≥0.47μF); 0603 ≥10μF;0805 ≥4.7μF;1206 ≥47μF;1210 ≥100μF	4V	≤20%	---	Rated voltage	Insulation Resistance	100V: All X7R;1210≥3.3μF	1GΩ or RxC ≥ 10 Ω-F whichever is smaller.	50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V:0603≥1μF;0805≥2.2μF; 1206≥2.2μF;1210 ≥10μF	25V:0201 ≥0.1μF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF	16V: 0201 ≥0.1μF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF		6.3V ; 4V ; Size≥1812	
Size	Dielectric	Rated voltage	Capacitance																																																																																																																																																																							
01R5	X5R	≤10V	C=0.1μF																																																																																																																																																																							
0201	X5R/X7R	≤10V ≥16V	C≥0.1μF C>0.1μF																																																																																																																																																																							
0402	X5R	≤16V 25V,50V	C>1.0μF C≥1.0μF																																																																																																																																																																							
0603	X5R/X7R	6.3V,10V 4V	C≥4.7μF ^{#1} C≥22μF																																																																																																																																																																							
0805	X5R/X7R	6.3V 10V,50V	C≥1.0μF C≥10μF																																																																																																																																																																							
1206	X5R/X7R	16V,25V	C≥10μF C≥22μF																																																																																																																																																																							
1210	X5R/X7R	≤6.3V 16V	C≥47μF C≥47μF																																																																																																																																																																							
	X7R	100V	C≥3.3μF																																																																																																																																																																							
Size	Dielectric	Rated voltage	Capacitance																																																																																																																																																																							
0201	X5R	16V,25V	C=0.1μF																																																																																																																																																																							
	X7R	16V	C≥0.022μF																																																																																																																																																																							
0402	X7R/X5R	50V	C>0.01μF																																																																																																																																																																							
		10~25V	C≥0.22μF																																																																																																																																																																							
0603	X5R	50V	C≥1.0μF																																																																																																																																																																							
	X7R	50V	C>0.1μF																																																																																																																																																																							
		25V	C=1.0μF																																																																																																																																																																							
0805	X5R/X7R	10V,16V	C≥1.0μF																																																																																																																																																																							
		100V	C≥0.47μF																																																																																																																																																																							
		50V	C≥0.68μF																																																																																																																																																																							
		35V	C≥2.2μF																																																																																																																																																																							
		10~25V	C≥4.7μF																																																																																																																																																																							
1206	X7R	100V	C≥1.0μF																																																																																																																																																																							
		50V	C≥2.2μF																																																																																																																																																																							
	X5R	100V	C>1.0μF																																																																																																																																																																							
		50V	C=4.7μF																																																																																																																																																																							
1210	X5R/X7R	50V~100V	C≥2.2μF																																																																																																																																																																							
1812	X7R	≤50V	C≥4.7μF																																																																																																																																																																							
		100V	C≥1.0μF																																																																																																																																																																							
1825	X7R	100V~250V	C≥1.0μF																																																																																																																																																																							
2220																																																																																																																																																																										
2225																																																																																																																																																																										
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																																																																																																																								
100V	≤3%	≤6% 1206 ≥0.47μF ≤7% 1812 ≥4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF ≤7.5% 0603 ≥0.068μF;0805 >0.1μF;1206 ≥1μF;1210 ≥2.2μF ≤20% 0805 >0.22μF;1210 ≥3.3μF																																																																																																																																																																								
50V	≤3%	≤6% 0201(50V);0603 ≥0.047μF;0805 ≥0.18μF;1206 ≥0.47μF ≤7% 1812 ≥4.7μF;1825≥4.7μF; 2220≥4.7μF; 2225≥4.7μF ≤10% 0201 ≥0.01μF;1210 ≥3.3μF																																																																																																																																																																								
35V	≤5%	≤20% 0402 ≥0.012μF;0603>0.1μF;0805 ≥1μF(0805/X7R>0.47μF); 1206 ≥2.2μF;1210 ≥10μF; ≤10% 0603 ≥1μF;0805≥2.2μF;1206 ≥2.2μF;1210 ≥10μF ≤14% 0201 ≥0.01μF(0201/X5R=0.01μF);0805 ≥1μF;1210 ≥10μF*																																																																																																																																																																								
25V	≤5%	≤15% 0201 ≥0.1μF(0201/X5R>0.01μF); 0603 ≥0.47μF;TTseries 0402 ≥0.10μF(0402/X7R ≥0.056μF);0805 ≥2.2μF; 1206 ≥4.7μF;1210 ≥22μF(1210/X5R ≥10μF)*; ≤20% 0402 ≥0.33μF																																																																																																																																																																								
16V	≤5%	≤10% 0603 ≥0.15μF;0805 ≥0.68μF;1206 ≥2.2μF;1210 ≥4.7μF ≤15% 0201 ≥0.01μF(0201/X7R ≥0.022μF);0402 ≥0.033μF; 0603>0.47μF;0805 ≥2.2μF;1206 ≥4.7μF;1210 ≥22μF																																																																																																																																																																								
10V	≤7.5%	≤15% 0201 ≥0.012μF;0402 ≥0.22μF (0402/X7R ≥0.15μF); 0603 ≥0.33μF;0805 ≥2.2μF;1206 ≥2.2μF;1210 ≥22μF ≤20% 0201 ≥0.1μF;0402 ≥1μF;0603/X5R ≥10μF;01R5/X5R																																																																																																																																																																								
6.3V	≤15%	≤30% 0201 ≥0.1μF;0402 ≥1μF(0402/X6S ≥0.47μF); 0603 ≥10μF;0805 ≥4.7μF;1206 ≥47μF;1210 ≥100μF																																																																																																																																																																								
4V	≤20%	---																																																																																																																																																																								
Rated voltage	Insulation Resistance																																																																																																																																																																									
100V: All X7R;1210≥3.3μF	1GΩ or RxC ≥ 10 Ω-F whichever is smaller.																																																																																																																																																																									
50V: 0402>0.01μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																																																																																																																																																										
35V:0603≥1μF;0805≥2.2μF; 1206≥2.2μF;1210 ≥10μF																																																																																																																																																																										
25V:0201 ≥0.1μF; 0402≥0.22μF; 0603≥2.2μF;0805≥2.2μF; 1206≥10μF;1210≥10μF																																																																																																																																																																										
16V: 0201 ≥0.1μF;0402≥0.22μF;0603≥1μF;0805≥2.2μF; 1206≥10μF;1210≥47μF																																																																																																																																																																										
10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF																																																																																																																																																																										
6.3V ; 4V ; Size≥1812																																																																																																																																																																										

* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

APPENDIXES

■ Tape & reel dimensions

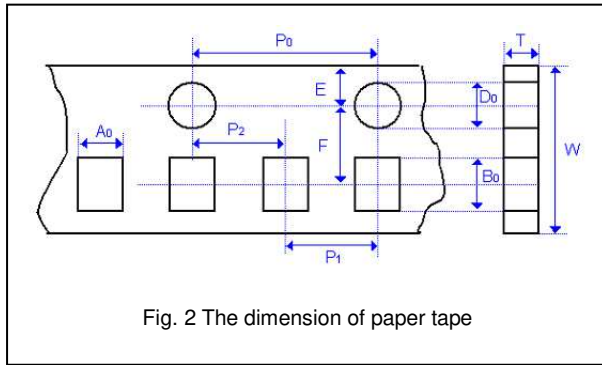


Fig. 2 The dimension of paper tape

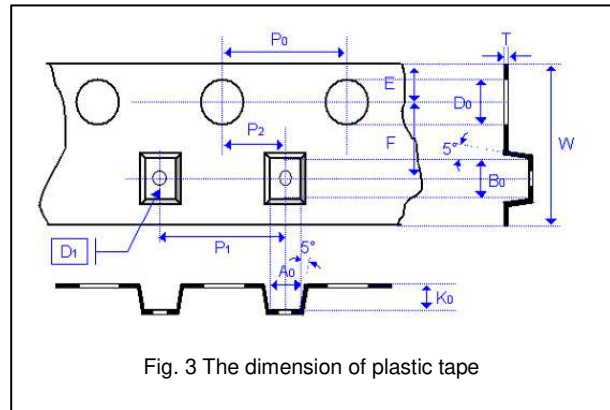


Fig. 3 The dimension of plastic tape

Size	0201	0402	0603	0805			1206			1210				1808		1812		
Thickness	L	N,E	S,H,X	A,H	B,T	D,I	B,T	C,J,D	G,P	T	C,D	G,K	M	D,F	G,K	D,F	G,K	M,U
A ₀	0.40 +/-0.10	0.70 +/-0.20	1.05 +/-0.30	1.50 +/-0.20	1.50 +/-0.20	< 1.80	1.90 +/-0.50	< 2.00	<2.30	< 3.05	< 3.05	< 3.05	< 3.20	< 2.50	< 2.50	< 3.90	< 3.90	< 3.90
B ₀	0.70 +/-0.10	1.20 +/-0.20	1.80 +/-0.30	2.30 +/-0.20	2.30 +/-0.20	< 2.70	3.50 +/-0.50	< 3.70	< 4.00	< 3.80	< 3.80	< 3.80	<4.00	< 5.30	< 5.30	< 5.30	< 5.30	< 5.30
T	≤ 0.55	≤ 0.80	≤ 1.20	≤ 1.15	≤ 1.20	0.23 +/-0.1	≤ 1.20 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.23 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1	0.25 +/-0.1
K ₀	-	-	-	-	-	< 2.00	< 2.00	< 2.50	< 1.50	< 2.00	< 2.50	< 2.50	< 3.20	< 2.00	< 2.50	< 2.00	< 2.50	< 3.50
W	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	8.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30	12.00 +/-0.30
P ₀	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10
10xP ₀	40.00 +/-0.10	40.00 +/-0.10	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20
P ₁	2.00 +/-0.05	2.00 +/-0.05	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	8.00 +/-0.10	8.00 +/-0.10
P ₂	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10	2.00 +/-0.10
D ₀	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0
D ₁	-	-	-	-	-	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.00 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10	1.50 +/-0.10
E	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10	1.75 +/-0.10
F	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	3.50 +/-0.05	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10	5.50 +/-0.10


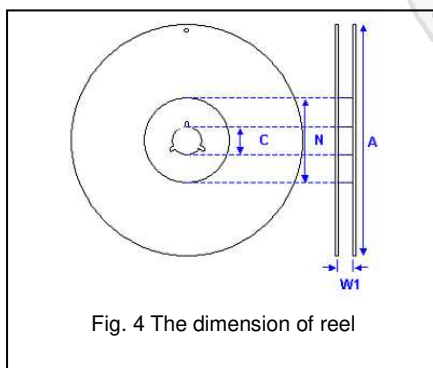


Fig. 4 The dimension of reel

Size	0201, 0402, 0603, 0805, 1206, 1210			1812
Reel size	7"	10"	13"	7"
C	13.0±0.5	13.0±0.5	13.0±0.5	13.0±0.5
W ₁	10.0±1.5	10.0±1.5	10.0±1.5	12.4±2.0/-0
A	178.0±2.0	250.0±2.0	330.0±2.0	178.0±2.0
N	60.0+1.0/-0	50 min	50 min	60.0+1.0/-0


■ Peeling force (EIA-481)

Peel-off force should be in the range of 10 grams to 100 grams at a peel-off speed of 300±10 mm/min.

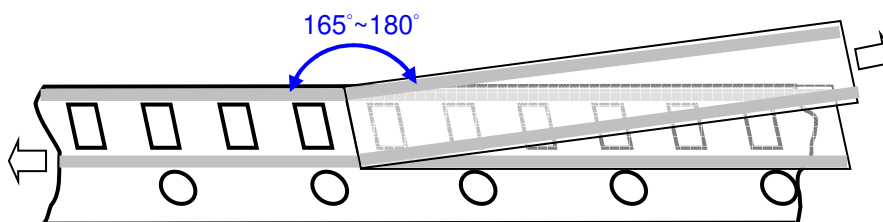

Multilayer Ceramic Capacitors

Example of customer label

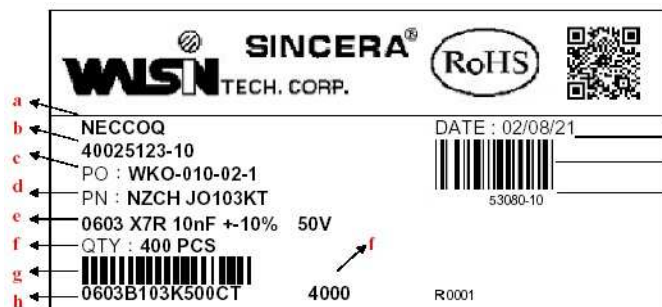

*Customized label is available upon request

- a. Customer name
- b. WTC order series and item number
- c. Customer P/O
- d. Customer P/N
- e. Description of product
- f. Quantity
- g. Bar code including quantity & WTC P/N or customer
- h. WTC P/N
- i. Shipping date
- j. Order bar code including series and item numbers
- k. Serial number of label

Constructions

No.	Name	NP0,	X7R, X5R
①	Ceramic material	CaZrO ₃ based	BaTiO ₃ based
②	Inner electrode	Ni	
③	Termination	Inner layer	Cu
④		Middle layer	Ni
⑤		Outer layer	Sn (Matt)

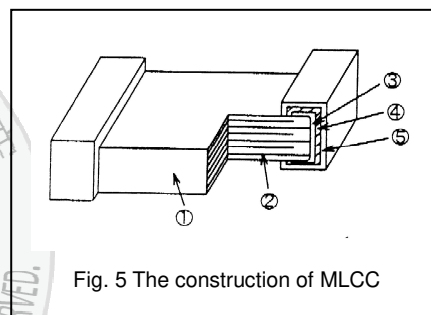


Fig. 5 The construction of MLCC

Storage and handling conditions

- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions; MSL Level 1.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

Multilayer Ceramic Capacitors

Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N_2 within oven are recommended.

