

BCA120S15D2

Silicon Carbide Schottky Diode

1200V, 15A



bestirpower

Description

BCA120S15D2 utilizes bestirpower's advanced silicon carbide diode technology. This technology combines the benefits of excellent low forward voltage and robustness. Consequently, the family is suitable for application requiring high power efficiency


Applications

- Solar inverter, UPS
- EV charging station
- Power Factor Correction

Features

V _{RRM}	I _F	T _C	Q _c
1200 V	15 A	151 °C	92 nC

- No reverse recovery current
- Low forward voltage
- 175°C Max junction temperature
- High surge current capability
- Switching behavior independent of temperature
- Halogen Free and RoHS compliant

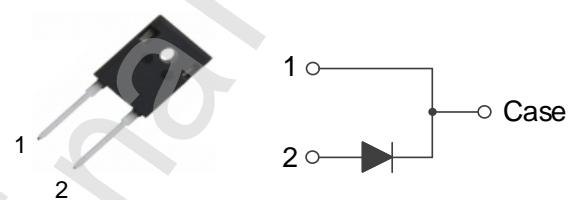

Absolute Maximum Ratings ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit	
V _{RRM}	Repetitive Peak Reverse Voltage	1200	V	
I _F	Forward Current	T _C = 25°C	42	A
		T _C = 135°C	20	A
		T _C = 151°C	15	A
I _{F,SM}	Non-Repetitive Forward Surge Current	T _C = 25°C, t _p = 10 ms	106	A
		T _C = 150°C, t _p = 10 ms	90	A
I _{F,Max}	Non-Repetitive Peak Forward Current	T _C = 25°C, t _p = 10 μs	850	A
		T _C = 150°C, t _p = 10 μs	722	A
I ² dt value	J I ² t	T _C = 25°C, t _p = 10 ms	56	A ² s
		T _C = 150°C, t _p = 10 ms	40	A ² s
P _{tot}	Power Dissipation	T _C = 25°C	217	W
T _J , T _{STG}	Operating Junction and Storage Temperature	-55 to +175	°C	

Thermal Characteristics

Symbol	Parameter	Value	Unit
R _{θJC}	Thermal Resistance, Junction to Case, Max.	0.69	°C/W

Package Marking and Ordering Information

Part Number	Top Marking	Package	Packing Method	Quantity
BCA120S15D2	BCA120S15D2	TO247-2	Tube	30 units

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_F	Forward Voltage	$I_F = 15 \text{ A}, T_C = 25^\circ\text{C}$		1.39	1.70	V
		$I_F = 15 \text{ A}, T_C = 175^\circ\text{C}$		1.8	-	
I_R	Reverse Current	$V_R = 1200 \text{ V}, T_C = 25^\circ\text{C}$		10	100	μA
		$V_R = 1200 \text{ V}, T_C = 175^\circ\text{C}$		-	300	
Q_C	Total Capacitive Charge	$V_R = 800 \text{ V}, T_C = 25^\circ\text{C}$		92		nC
C	Total Capacitance	$V_R = 1 \text{ V}, f = 100 \text{ kHz}$		1010		pF
		$V_R = 800 \text{ V}, f = 100 \text{ kHz}$		65		
E_C	Capacitance Stored Energy	$V_R = 800 \text{ V}, T_C = 25^\circ\text{C}$		26		μJ

Typical Performance Characteristics

Figure 1. Power Derating

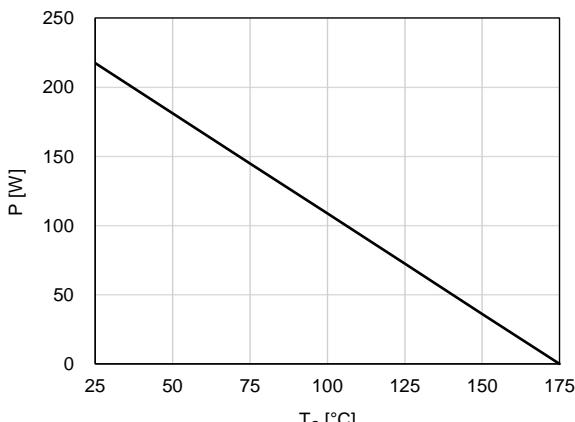


Figure 2. Current Derating

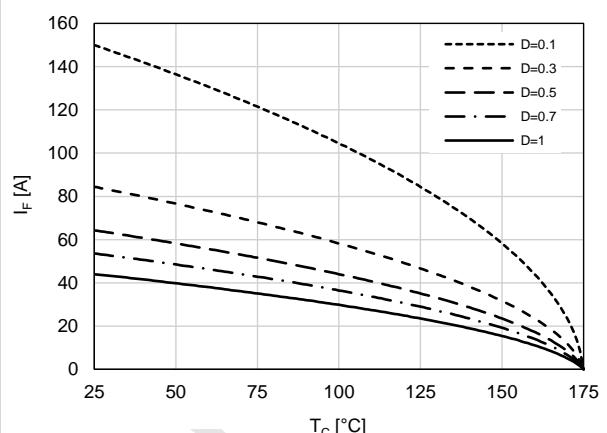


Figure 3. Forward Characteristics

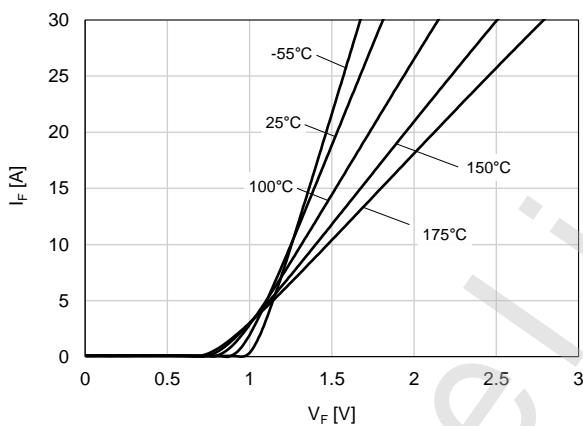


Figure 4. Reverse Characteristics

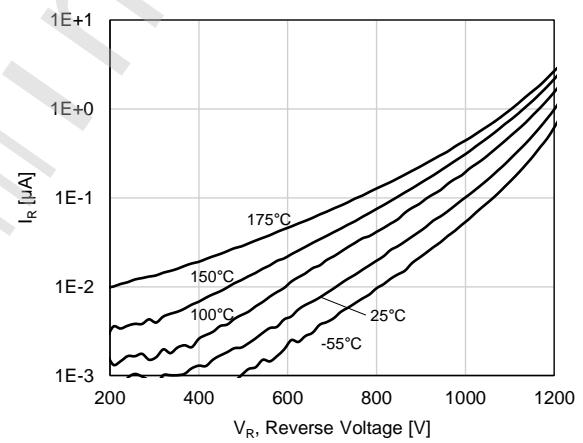


Figure 5. Capacitive Charge Characteristics


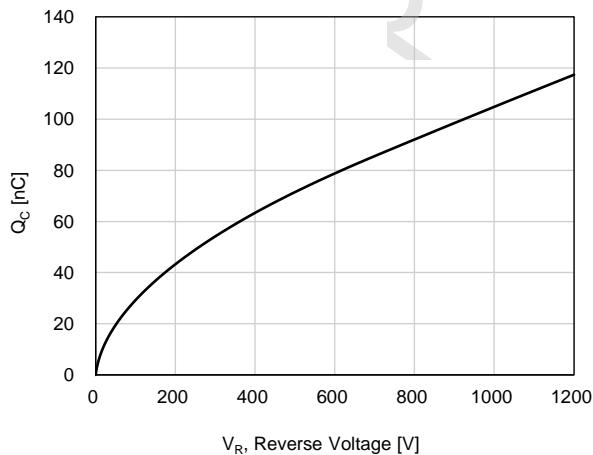


Figure 6. Capacitance Stored Energy

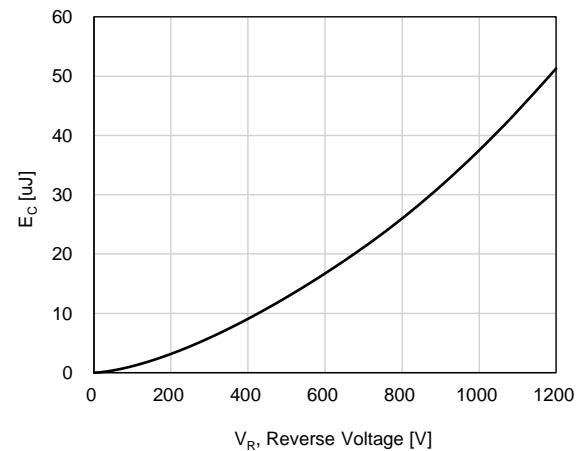

Typical Performance Characteristics

Figure 7. Capacitance Characteristics



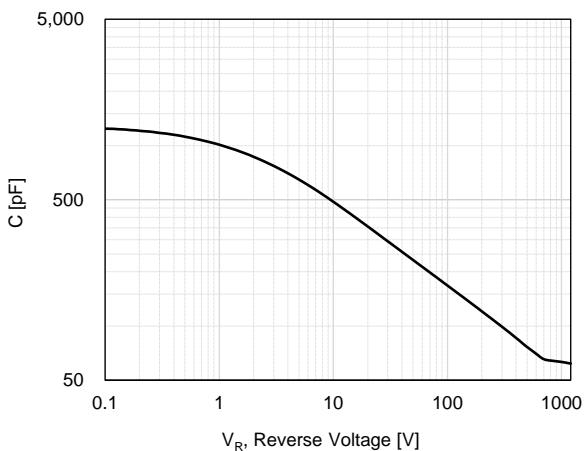


Figure 8. Transient Thermal Response Curve

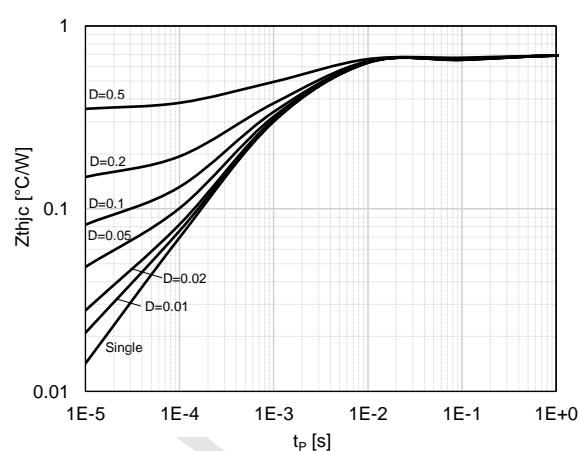

Package Outlines

TO247-2

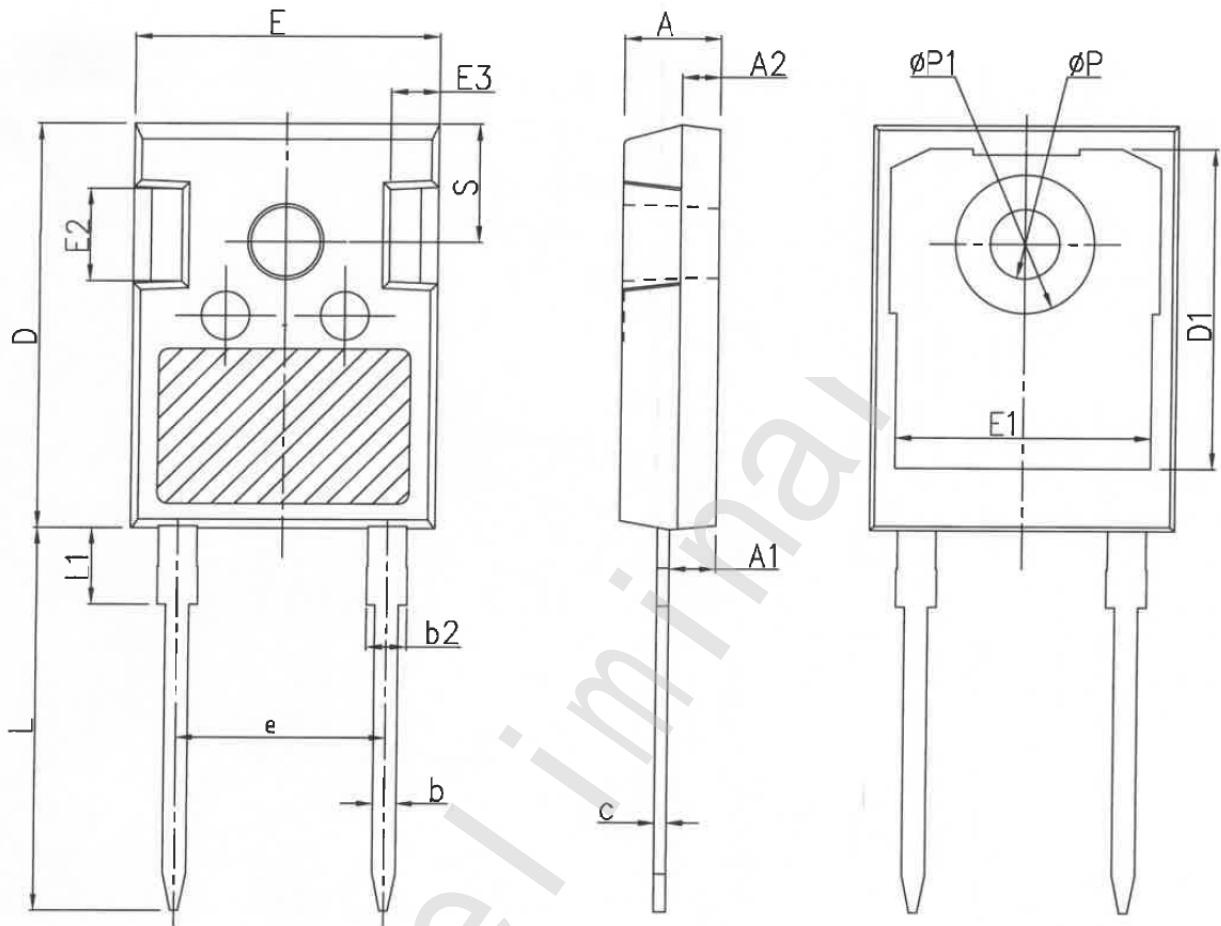

COMMON DIMENSIONS

SYMBOL	mm		
	MIN	NOM	MAX
A	4.80	5.00	5.20
A1	2.21	2.41	2.59
A2	1.85	2.00	2.15
b	1.11	1.21	1.36
b2	1.91	2.01	2.21
c	0.51	0.61	0.75
D	20.70	21.00	21.30
D1	16.25	16.55	16.85
E	15.50	15.80	16.10
E1	13.00	13.30	13.60
E2	4.80	5.00	5.20
E3	2.30	2.50	2.70
e	10.88BSC		
L	19.62	19.92	20.22
L1	-	-	4.30
ØP	3.40	3.60	3.80
ØP1	-	-	7.30
S	6.15BSC		

* Dimensions in millimeters

Disclaimer

Bestirpower reserve the right to make changes, corrections, enhancements, modifications, and improvements to Bestirpower products and/or to this document at any time without notice.

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. Bestirpower does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Products or technical information described in this document.

This document is the property of Bestirpower Co., LTD., and not allowed to copy or transformed to other format if not under the authority approval.

© 2024 bestirpower – All rights reserved