

# SH-8EP008A8LDLS - Cable connector



1627077

<https://www.phoenixcontact.com/us/products/1627077>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: SH, straight long, shielded: yes, SPEEDCON, No. of pos.: 4+4+PE / 3+N+PE, Direction of rotation: Standard, contact connection type: Pin, Crimp connection, cable diameter range: 7.5 mm ... 18 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1245430

## Your advantages

- Reduced connection time with optional SPEEDCON fast locking system
- Safe use in the field, thanks to high degree of protection
- Consistent EMC protection for reliable connection solutions in the industrial environment

## Commercial data

Item number	1627077
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB33
Product key	ABRCDB
GTIN	4055626310671
Weight per piece (including packing)	142.3 g
Weight per piece (excluding packing)	126.8 g
Customs tariff number	85366990
Country of origin	DE

## Technical data

## Notes

## Order information:

Without data element, crimp contacts, 4x Ø 1 mm, 5x Ø 2 mm, order separately

## Safety note

## Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.

- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.

- The products are suitable for applications in plant, controller, and electrical device engineering.

- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.

- Assembled products may not be manipulated or improperly opened.

- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)).

- When using the product in direct connection with third-party manufacturers, the user is responsible.

- For operating voltages > 50 V AC, conductive connector housings must be grounded

- Ensure that the protective or functional ground has been properly connected.

- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector

- Only use tools recommended by Phoenix Contact

- The installation notes/Design In documents online on the download page at [phoenixcontact.com/products](https://www.phoenixcontact.com/products) must be observed for this product.

- Operate the connector only when it is fully plugged in and interlocked.

- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.

- Observe the minimum bending radius of the cable. Lay the cable without twisting it.

- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to

# SH-8EP008A8LDLS - Cable connector



1627077

<https://www.phoenixcontact.com/us/products/1627077>

warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

## Product properties

Product type

Circular connector (cable-side)

Data management status

Article revision

12

## Connector

Insulating body

Note

Order information: Without data element, crimp contacts, 4x Ø 1 mm, 5x Ø 2 mm, order separately

Coding

N

Insertion/withdrawal cycles

100

Connection method

Crimp connection

Contact switching type

Pin

Application

Hybrid

Number of positions

9

Direction of rotation

Standard

Connection profile

4+4+PE / 3+N+PE

Contact diameter **Power contacts**

2 mm

Litz wire cross-section **Power contacts** min.

0.25 mm<sup>2</sup>

Litz wire cross-section **Power contacts** max.

4 mm<sup>2</sup>

Rated current **Power contacts**

30 A

Note

for max. connection cross section

Rated voltage

630 V AC

Rated surge voltage

6 kV

Overvoltage category

III

Degree of pollution

3

Rated voltage (II/3) power contact

850 V DC

Rated voltage (III/3) power contact

630 V AC

Contact diameter **Signal contacts**

1 mm

Litz wire cross-section **Signal contacts** min.

0.06 mm<sup>2</sup>

Litz wire cross-section **Signal contacts** max.

1 mm<sup>2</sup>

Nominal current per signal contact

8 A

Note

for max. connection cross section

Rated voltage Signal contact

50 V

Rated surge voltage

1.5 kV

Overvoltage category

III

Degree of pollution

3

Rated voltage (III/3) signal contact

50 V

# SH-8EP008A8LDLS - Cable connector



1627077

<https://www.phoenixcontact.com/us/products/1627077>

Installation height	2000 m
---------------------	--------

## Housing

Notes on operation	The suitability for assembly must be checked when fully assigned with maximum wire cross sections.
Housing material	Metal
Type of locking	SPEEDCON
Pg screw connection	none
Degree of protection (plugged in)	IP67
	IP68
	IP69K
Thread type	M23

## Seal

External cable diameter	7.5 mm ... 18 mm
-------------------------	------------------

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 115 °C (see derating curve)
Ambient temperature (storage/transport)	15 °C ... 25 °C
Permissible humidity (storage/transport)	50 % ... 65 %

# SH-8EP008A8LDLS - Cable connector




1627077

<https://www.phoenixcontact.com/us/products/1627077>

## Drawings

Diagram

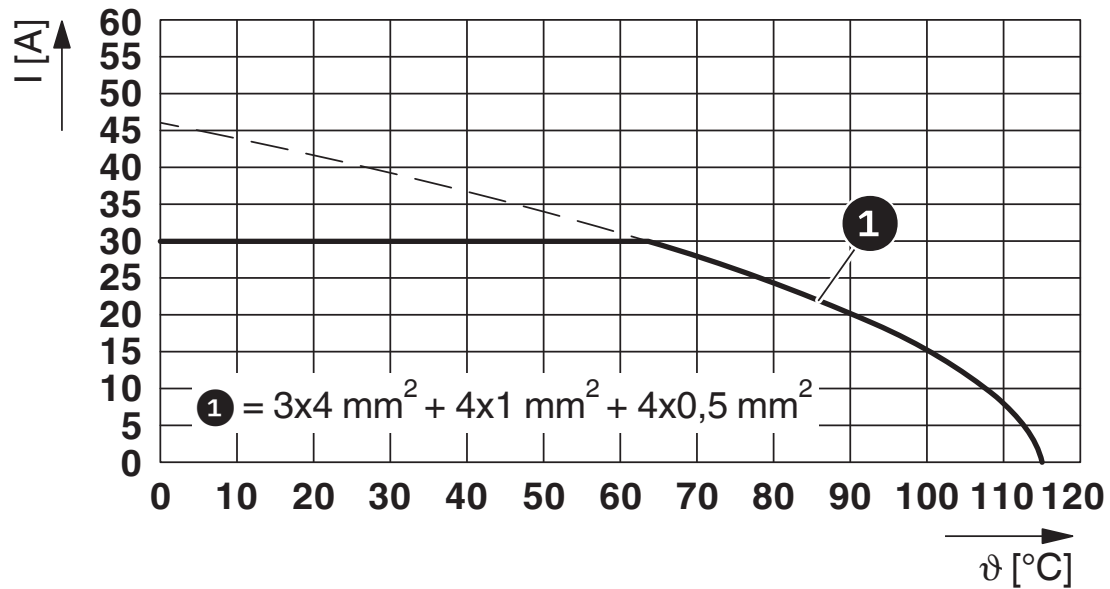

$I$  = current strength,  $\vartheta$  = ambient temperature, power contacts A-C: 3 x up to 30 A, signal contacts: 4 x 2 A constant, data contacts: 4 x 1 A constant

# SH-8EP008A8LDLS - Cable connector



1627077

<https://www.phoenixcontact.com/us/products/1627077>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# SH-8EP008A8LDLS - Cable connector



1627077  
<https://www.phoenixcontact.com/us/products/1627077>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	6aeb1b0-e59e-4b16-ba75-549159d08eeb

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)