
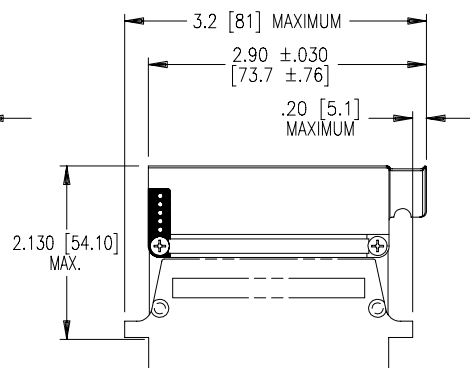
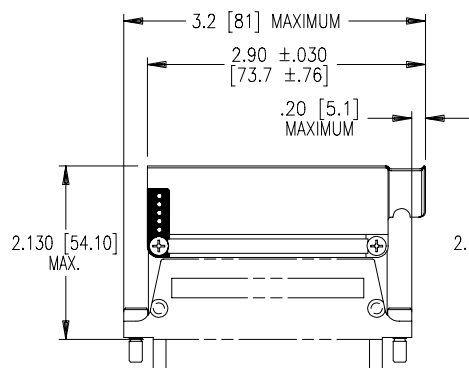
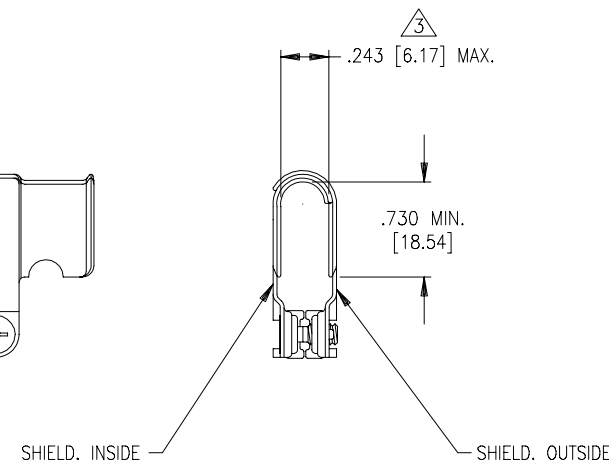
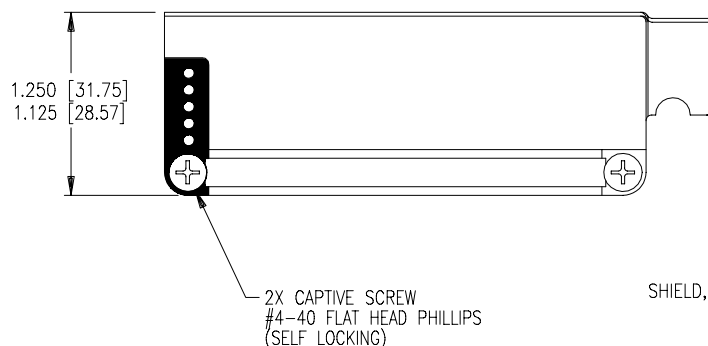


NOTES:

1. MATERIAL:
 - A) SHIELD: PHOSPHOR BRONZE PER QQ-B-750.
 - B) CAPTIVE SCREW: STAINLESS STEEL PER QQ-S-763, 300 SERIES.
 - C) CLAMP INSERT: FLUOROSILICONE ELASTOMER PER MIL-R-25988.
2. FINISH: SEE TABULATION.
3. WHEN SCREWS ARE TIGHTENED TO ACHIEVE 0.1 INCH SPACING BETWEEN SHELL HALVES (EAR THICKNESS) THIS DIMENSION SHALL BE 0.225 MIN.
4. APPLICABLE RAYCHEM PART NUMBER IS MARKED ON BACKSHELL PACKAGE.
5. THIS BACKSHELL IS FOR USE WITH RAYCHEM MTC SERIES CONNECTORS: 2 INCH PLUG OR 2 INCH RECEPTACLE AS SHOWN.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
B	REVISED PER ECN T-08777	10-23-87	J.B.
C	REDRAWN PER DCR# T-29122	4/16/2001	M.HIGGY

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

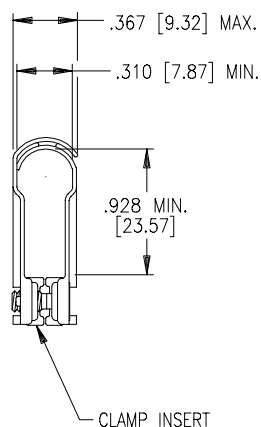

TABULATION			
PART NUMBER	DESCRIPTION	FINISH	
		SHIELD	CAPTIVE SCREW
CHA-0071	AS SHOWN HEREON	1. SHADED AREA IS TIN PLATED PER MIL-T-10727 OVER NICKEL PER MIL-C-26074	PASSIVATE PER QQ-P-35
CHA-0071-003	AS SHOWN HEREON EXCEPT CAPTIVE SCREW IS CADMIUM PLATED	2. UNSHADAD AREA IS DULL BLACK PAINT OVER NICKEL PER MIL-C-26074	CADMIUM PLATED PER QQ-P-416
CHA-0071-301	AS SHOWN HEREON EXCEPT BODY IS TIN PLATED AND CAPTIVE SCREW IS CADMIUM PLATED	ENTIRE SHIELD IS TIN PLATED PER MIL-T-10727 OVER NICKEL PER MIL-C-26074	CADMIUM PLATED PER QQ-P-416

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.		DRAWN	ZS.ORBAN	4/11/2001	tyco Electronics Raychem		WIRE AND HARNESSING PRODUCTS 307 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
		CHECKED						
DECIMALS .XXX ± .XX ± ANGLES .X ±		APPROVED	M.HIGGY	4/16/2001	TITLE RIGHT ANGLE BREAKOUT BACKSHELL ASSY. (2.9 LONG X 1.2 HIGH) 2 INCH MTC		SIZE C	
		APPROVED						
WEIGHT: [33 Grams] MAXIMUM.		CAD NAME		T29122.DWG	DO NOT SCALE THIS DRAWING		SHEET 1 OF 1	
THIRD ANGLE PROJECTION					CODE IDENT. NO.		REV	
					06090		CHA-0071-XXX	