

**CH20M22 S PPP GGY 2019****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image****Superior efficiency, flexibility and design - the "standard tailor-made fit"**

When selecting a housing design, flexibility is a key factor. Other important criteria are: scalability, customised design, innovative functionality and cost efficiency. You need a choice which offers the maximum performance with the minimum overhead.

The CH20M22 modular electronics housing is the standard format from amongst the different housing widths. It has the optimal width for most typical electronics applications.

The entire system is characterized by excellence: outstanding scalability and flexibility, a high security level, innovative application functionality and a variety of practical details.

- **Quicker installation** with features such as "Wire ready" the universal multi-tool screw head
- **User-friendly operations:** with clear and permanent labelling and extra marking possibilities, integrated release clip or transparent cover
- **Maximum interference immunity** with ESD-compliant construction featuring deeply overlapping module joint edges made from high-performance plastic
- **High operational reliability** with the unique Auto-Set coding system and featuring double-sided touch protection on the pin header and socket blocks

CH20M - a compact name for the most flexible system available on the market. It doesn't just stand for "Component Housing IP20 Modular".

CH20M also stands for efficiency and innovation throughout design, production and use.

**General ordering data**

|                                                               |                                                                                |
|---------------------------------------------------------------|--------------------------------------------------------------------------------|
| Version                                                       | Modular housing, OMNIMATE Housing - series CH20M Graphite grey, Width: 22.8 mm |
| Order No.                                                     | <a href="#">1411500000</a>                                                     |
| Type                                                          | CH20M22 S PPP GGY 2019                                                         |
| GTIN (EAN)                                                    | 4050118212556                                                                  |
| Qty.                                                          | 10 pc(s).                                                                      |
| Information regarding whole assembly, see referenced articles | <a href="#">1104450000</a>                                                     |

## CH20M22 S PPP GGY 2019

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Height     | 22.8 mm  | Height (inches) | 0.898 inch |
| Width      | 22.8 mm  | Width (inches)  | 0.898 inch |
| Length     | 105.5 mm | Length (inches) | 4.154 inch |
| Net weight | 8.4 g    |                 |            |

## Temperatures

|                             |                 |          |                                                   |
|-----------------------------|-----------------|----------|---------------------------------------------------|
| Operating temperature range | -40 °C...120 °C | Humidity | 5 - 93% rel. humidity, Tu = 40°C, no condensation |
|-----------------------------|-----------------|----------|---------------------------------------------------|

## Component Properties

|                                                       |    |                                  |   |
|-------------------------------------------------------|----|----------------------------------|---|
| Cut out as preparation for functional port integrated | No | Number of connection levels      | 3 |
| Number of poles, max.                                 | 12 | Number of slots for female plugs | 3 |
| Number of ventilation openings                        | 0  |                                  |   |

## General data

|                      |               |                        |                         |
|----------------------|---------------|------------------------|-------------------------|
| Colour               | Graphite grey | Colour chart (similar) | RAL 7024                |
| Encapsulation option | No            | Protection degree      | IP20 in installed state |

## Material data

|                                  |           |                           |             |
|----------------------------------|-----------|---------------------------|-------------|
| Comparative Tracking Index (CTI) | 600 ≤ CTI | Insulating material       | PA 66 GF 30 |
| Insulating material group        | I         | UL 94 flammability rating | V-0         |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001031    | ETIM 7.0    | EC001031    |
| ETIM 8.0    | EC001031    | ECLASS 9.0  | 27-18-27-90 |
| ECLASS 9.1  | 27-18-27-90 | ECLASS 10.0 | 27-18-27-92 |
| ECLASS 11.0 | 27-18-27-92 | ECLASS 12.0 | 27-18-27-92 |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                  |                                          |
|------------------|------------------------------------------|
| Engineering Data | <a href="#">CAD data – STEP</a>          |
| Catalogues       | <a href="#">Catalogues in PDF-format</a> |


## CH20M22 S PPP GGY 2019

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

### Product image

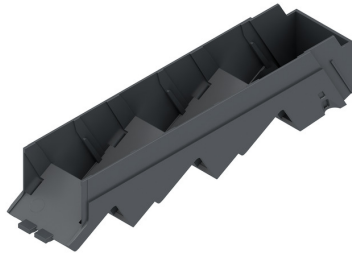

### Product image



### Dimensioned drawing

