
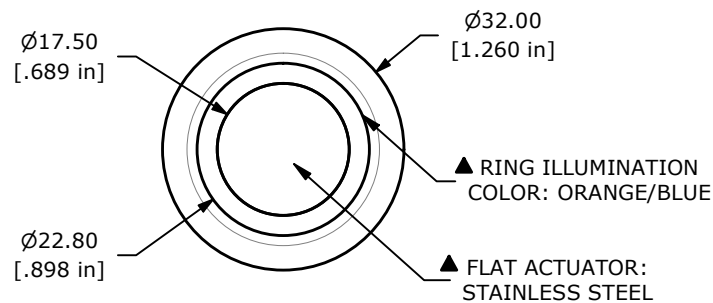
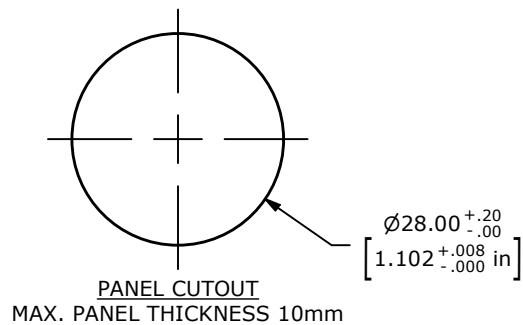


▲ SWITCH FUNCTION


POS. 1	POS. 2
1-2 ON 3-4 OFF	1-2 (OFF) 3-4 (ON)

() = MOMENTARY

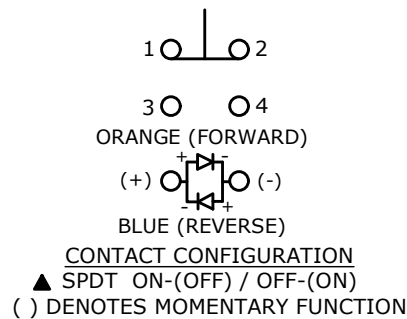

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF. ONLY
- RATING: 2A @ 48VDC
- CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
- INSULATION RESISTANCE: 1,000M Ω @ 500VDC
- DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- ELECTRICAL LIFE: 50,000 CYCLES
- OPERATING TEMPERATURE: -20°C to 55°C
- INGRESS PROTECTION: IP66
- SUPPLIED HARDWARE: O-RING AND HEXNUT
- ▲ DENOTES CRITICAL PARAMETER
- ILLUMINATION COLOR: ORANGE (FORWARD), BLUE (REVERSE)
- ILLUMINATION VOLTAGE: 12V

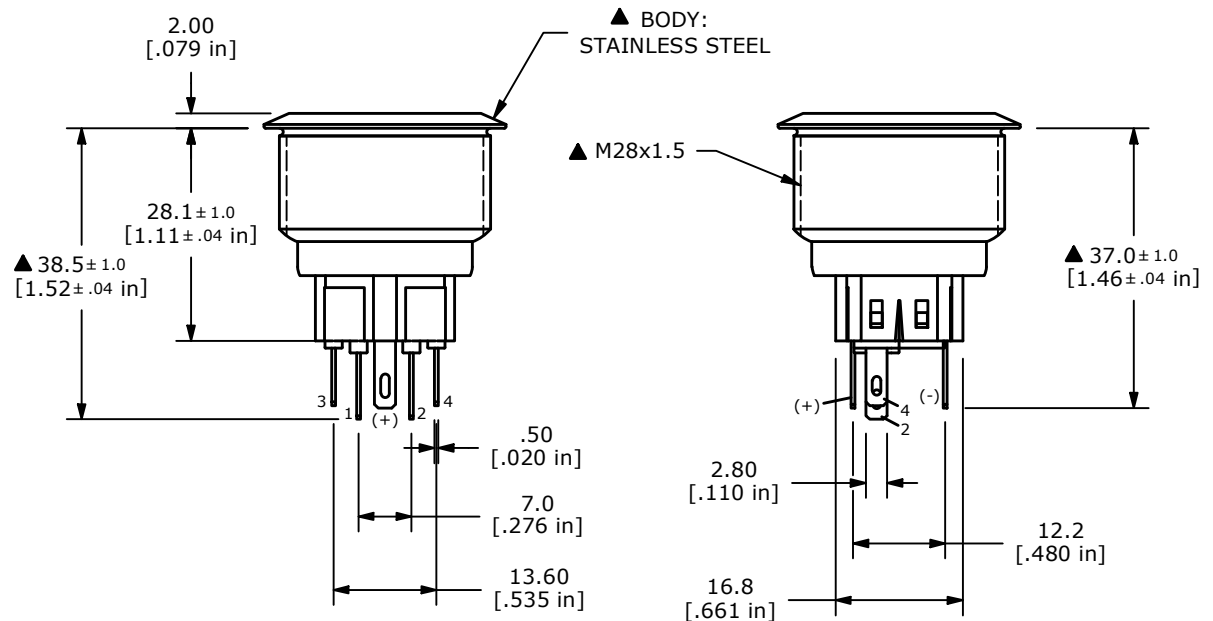

C	24647	UPDATE THREAD LENGTH TO 15.0	12/18/20	JM
B	23839	UPDATED RATING TO IP66	4/8/19	MJR
A	22747	RELEASE FOR PRODUCTION	3/7/17	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE PV9F2Y0SS-3L4

SCALE 1:1

DATE 3/7/2017

DR MW

DWG 52-PV9F2Y0SS3L4

REV C