


MC: 72	FINISH: SEE NOTE 4
DESCRIPTION: CONNECTOR, RECEPTACLE HERMETIC PIN UNIT SOLDER FLANGE MOUNT THREAD COUPLING MILD-DTL-38999/25 ENVELOPE	
CAGE CODE: 11139	

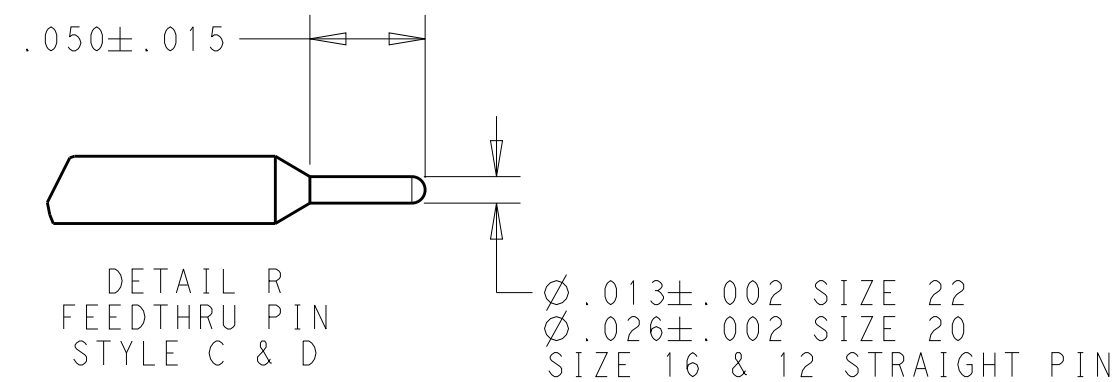

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 25MAR2019 CHK JUAN MONTE MAYOR 25MAR2019 ENRIQUE OCHOA APVD 25MAR2019 ENRIQUE OCHOA		 TE Connectivity	
DIMENSIONS: in 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.1 2 PLC ±.02 3 PLC ±.005 4 PLC ±.0005 ANGLES ±.5° FINISH		NAME CONNECTOR, RECEPTACLE -	
MATERIAL SEE NOTE 5		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A2	CAGE CODE 111139
		CUSTOMER DRAWING		DRAWING NO C-DTS21xxx-xxxxx	RESTRICTED TO 1 OF 1 REV B

PART NUMBER BREAKDOWN: DTS 21 Y 17-35 P N

- SHELL KEYING POSITIONS: N,A,B,C,D OR E
- CONTACT PIN STYLE: P = SOLDERCUP, X = EYELET, C = PCB PIN
- CONTACT SOC STYLE: S = SOLDERCUP, Z = EYELET, D = PCB PIN
- INSERT ARRANGEMENT
- SHELL SIZE: 9,11,13,15,17,19,21,23 OR 25
- CLASS: N = NICKEL PLATE OVER STAINLESS STEEL
- Y = ELECTRO-POLISHED STAINLESS STEEL
- H = SAME AS CLASS "Y" BUT SPACE GRADE
- SHELL MOUNTING STYLE: 21 = SOLDER FLANGE MOUNT
- BASIC IDENTIFIER: 38999 SERIES III HERMETIC RECEPTACLE

