


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

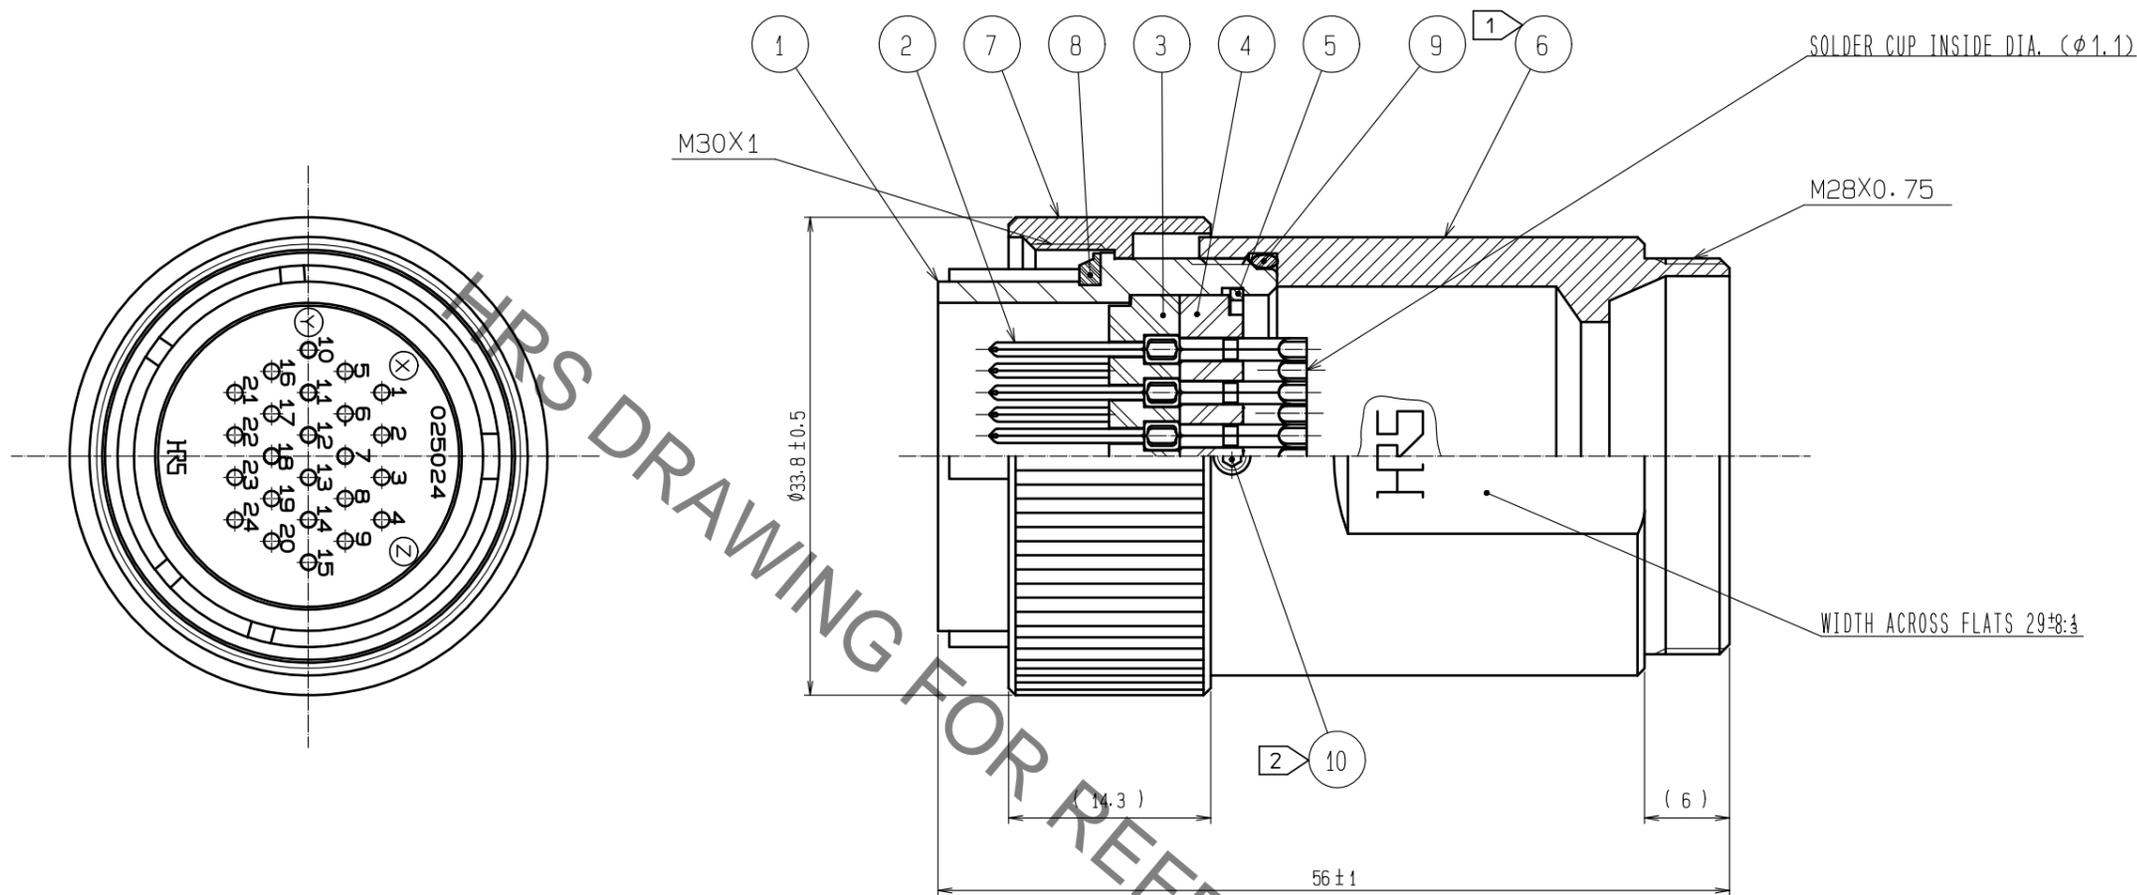

- NOTES
- ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ TO BE 5 TO 5.5 N · m.
 - ② THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑩ TO BE 0.2 TO 0.25 N · m.
 - ③ ROTATION EXAMPLES OF REF. NO. ① AND ⑥ ARE SHOWN.
 - ④ SCREW OF REF. NO. ①, ⑥, ⑧, LOCTITE 263, OR EQUIVALENT, LOCTITE JAPAN IS RECOMMENDED TO PREVENT FROM LOOSENING.
 - ⑤ THIS PRODUCT TO BE USED WITH CABLECLAMP, JR25WCC-**.
** DESIGNATE DIAMETER OF APPLICABLE CABLE.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL	
4	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	9	NBR	(GRAY)
3	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	8	NBR	(GRAY)
2	COPPER ALLOY	SILVER PLATING 3μm min.	7	BRASS	BLACK CHROME PLATING
1	ALMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : HY. KOBAYASHI			18.02.26	DRAWING NO. EDC-110546-31-00		
CHECKED : HY. KOBAYASHI			18.02.26	PART NO. JR25WP-24P(31)		
DESIGNED : TH. KAMEYA			18.02.22	CODE NO. CL114-2011-9-31		
DRAWN : MK. INOUE			18.02.13	<div style="text-align: right;"> 1/1 </div>		