


# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 500 V, nominal current: 32 A, number of connections: 4, connection method: Screw/plug-in connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 6 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: gray

## Your advantages

- Plugs with different conductor exit directions (lateral or upwards) enable practical, efficient wiring. This results in a high degree of flexibility, which is required in various areas of application.
- Screw flanges for securely latching plugs

## Commercial data

Item number	3060296
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE01
Product key	BE1141
Catalog page	Page 329 (C-1-2019)
GTIN	4046356090421
Weight per piece (including packing)	16.47 g
Weight per piece (excluding packing)	16.19 g
Customs tariff number	85369010
Country of origin	PL

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## Technical data

### Notes

General	The max. load current must not be exceeded by the total current of all connected conductors. Current and voltage are determined by the plug used.				
General	<table><tr><td>Note</td><td>The max. load current must not be exceeded by the total current of all connected conductors.</td></tr><tr><td></td><td>With a free-hanging connection, an insulating foil has to be placed between the plug connection and electrically conductive surfaces.</td></tr></table>	Note	The max. load current must not be exceeded by the total current of all connected conductors.		With a free-hanging connection, an insulating foil has to be placed between the plug connection and electrically conductive surfaces.
Note	The max. load current must not be exceeded by the total current of all connected conductors.				
	With a free-hanging connection, an insulating foil has to be placed between the plug connection and electrically conductive surfaces.				

### Product properties

Product type	Plug-in terminal block
Product family	UT
Number of connections	4
Number of rows	1
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W

### Connection data

Number of connections per level	4
Nominal cross section	4 mm <sup>2</sup>

### Level 1 below 1+2

Screw thread	M3
Tightening torque	0.6 ... 0.8 Nm
Stripping length	9 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 61984
Conductor cross section rigid	0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Cross section AWG	26 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	26 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with same cross section, solid	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



2 conductors with same cross section, flexible	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup>
Nominal current	32 A (observe derating)
Maximum load current	32 A (with 6 mm <sup>2</sup> conductor cross section)
Nominal voltage	500 V
Nominal cross section	4 mm <sup>2</sup>

## Dimensions

Width	6.2 mm
End cover width	2.2 mm
Height	82.4 mm
Depth on NS 35/7,5	47.5 mm
Depth on NS 35/15	55 mm

## Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

### Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed
Short-time withstand current 4 mm <sup>2</sup>	0.48 kA
Result	Test passed

### Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

## Mechanical properties

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## Mechanical data

Open side panel	Yes
-----------------	-----

## Mechanical tests

### Attachment on the carrier

Test force setpoint	1 N
Result	Test passed

## Environmental and real-life conditions

### Service life

Insertion/withdrawal cycles	100
-----------------------------	-----

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Spectrum	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$
ASD level	$0.964 \text{ (m/s}^2\text{)}^2/\text{Hz}$
Acceleration	0.58g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

### Shocks

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

### Ambient conditions

Ambient temperature (operation)	-60 °C (max. operating temperature see derating curve)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



Connection in acc. with standard

IEC 61984

## Mounting

Mounting type

NS 35/7,5

NS 35/15


# UT 4-QUATTRO/ 2P - Feed-through terminal block




3060296

<https://www.phoenixcontact.com/us/products/3060296>

## Drawings

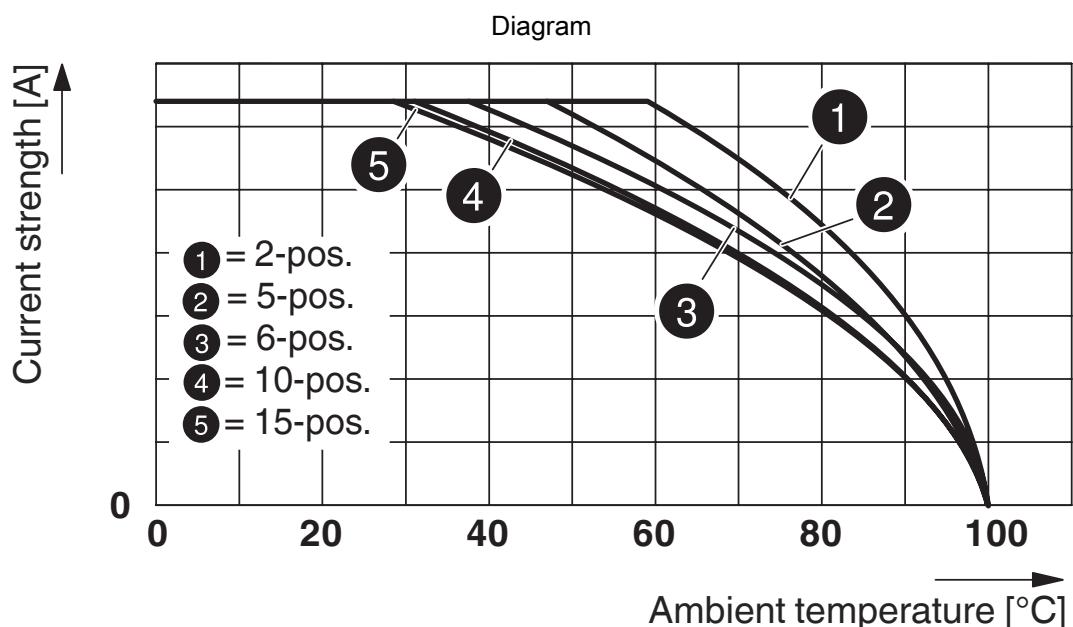

Circuit diagram

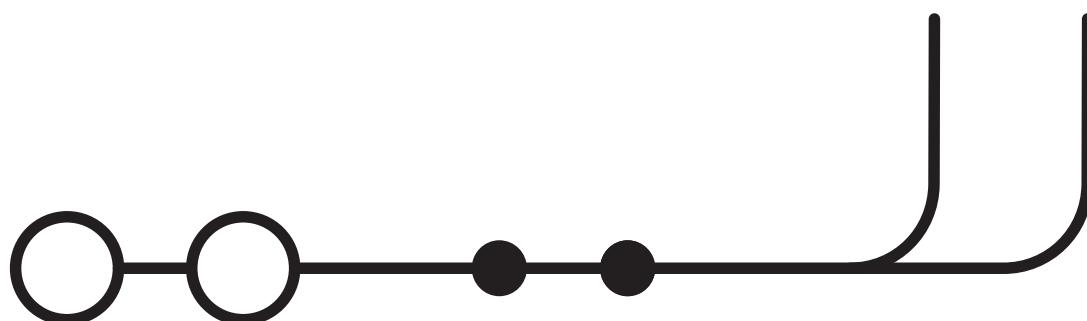

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3060296>



**CSA**

Approval ID: 13631



**cULus Recognized**

Approval ID: E60425



**CSA**

Approval ID: 13631



**cULus Recognized**

Approval ID: E60425

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## Classifications

### ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250117

### ETIM

ETIM 9.0	EC000897
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	2698fd55-e128-49fc-814a-0edb9ff05922

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

### Phoenix Contact USA

586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)