




Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > Ribbon Cable Connectors

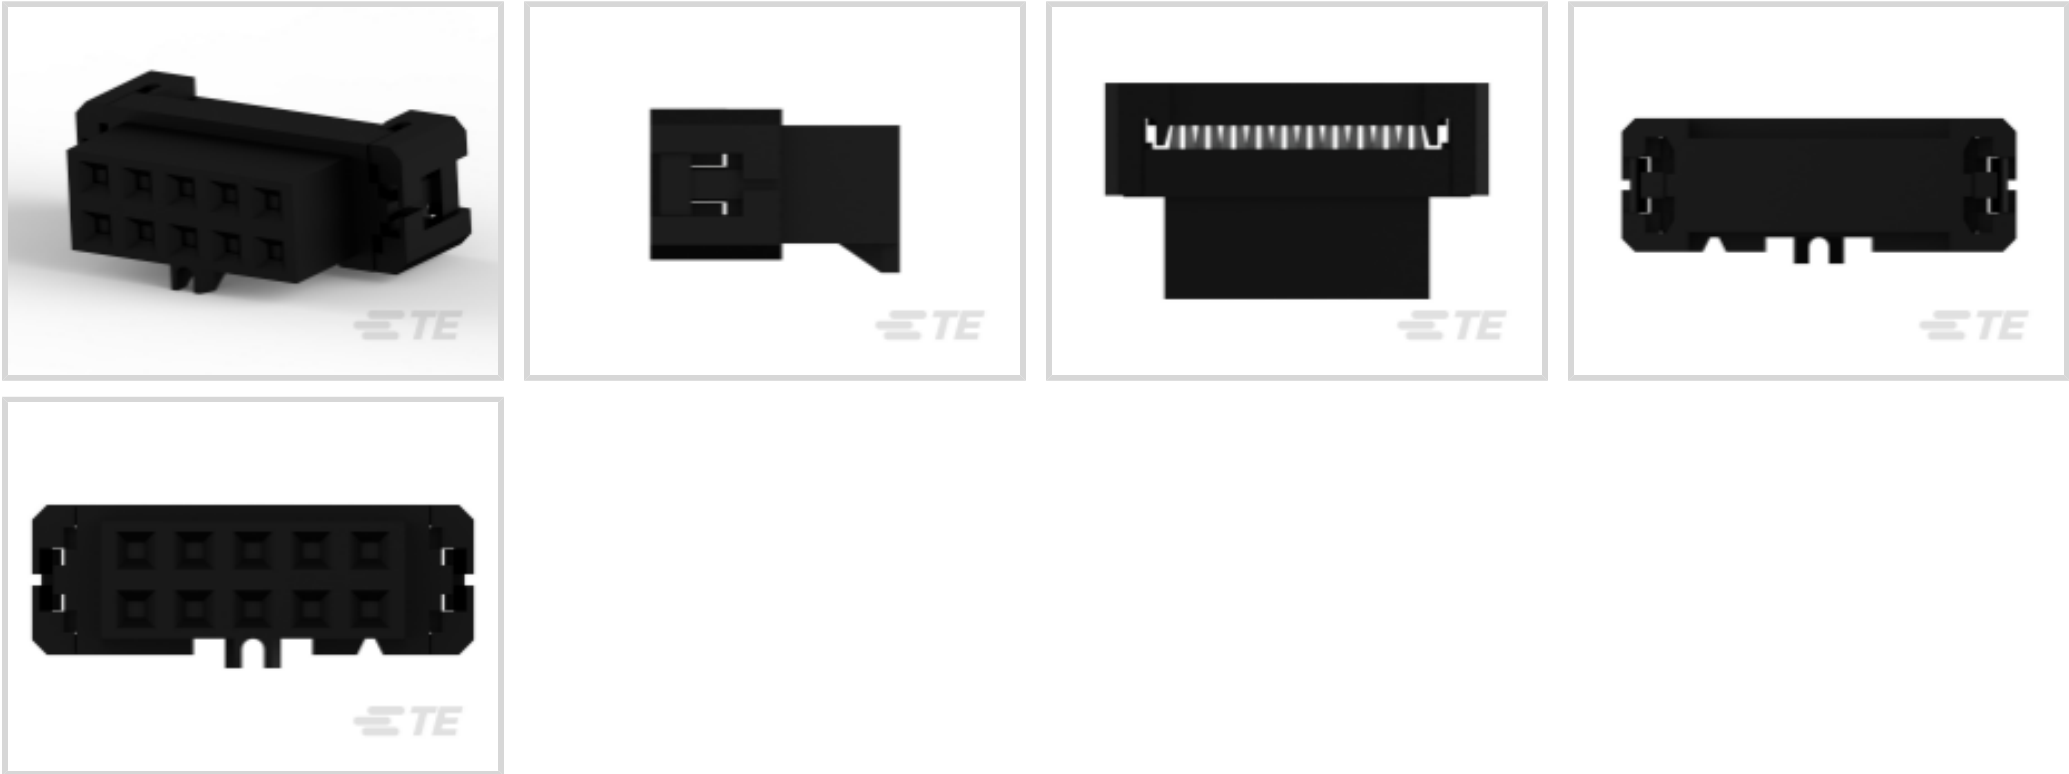

Connector System: **Wire-to-Board**

Number of Positions: **10**

Centerline (Pitch): **2 mm [.079 in]**

Row-to-Row Spacing: **2 mm [.1 in]**

Number of Rows: **2**

Features

Electrical Characteristics

Operating Voltage	125 VAC
Insulation Resistance	5000 MΩ

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Industry Standards

Compatible With Agency/Standards Products	UL, CSA
UL Rating	Recognized
UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL E28476, CSA LR7189

Packaging Features

Packaging Quantity	90
Packaging Method	Tray, Box & Tray

Contact Features

--	--



Mating Pin Diameter	.5 mm[.02 in]
Contact Mating Area Plating Material Thickness	.76 µm[29.92 µin]
Wire Contact Termination Area Plating Material	Gold
Mating Square Post Dimension	.5 mm[.02 in]
Contact Shape & Form	Single Beam
Contact Base Material	Phosphor Bronze
Wire Contact Termination Area Plating Thickness	.127 µm[5 µin]
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Type	Socket
Contact Current Rating (Max)	.5 A

Mechanical Attachment

Panel Mount Feature	Without
Mating Alignment	With
PCB Mount Alignment	With
Mating Alignment Type	Polarization
Mating Retention	With
Mating Retention Type	Ejection Latch
Connector Mounting Type	Cable Mount (Free-Hanging)

Body Features

Daisy Chain	Without
Primary Product Color	Black
Connector Profile	Low

Dimensions

Compatible Insulation Diameter Range	.71 – .87 mm[.028 – .034 in]
Connector Width	5.58 mm[.22 in]
Wire Size	28 AWG
Connector Height	8.48 mm[.334 in]
Connector Length	15.16 mm[.597 in]
Row-to-Row Spacing	2 mm[.1 in]

Housing Features

Housing Material	Polyester
Centerline (Pitch)	2 mm[.079 in]



Product Type Features

Connector Product Type	Connector Assembly
Connector System	Wire-to-Board
Connector & Housing Type	Receptacle
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	10
Number of Rows	2

Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1-5176264-9
10 AMPMODU 2MM DR VERT MNT LF

TE Part # 111620-1
2MM KEYING PLUG,COMB OF 10

TE Part # 5176837-4
10 AMPMODU 2MM, H, AU, LF

TE Part # 5176264-4
AMPMODU 2MM V 10P AU:0.2 BLACK LF

Customers Also Bought

TE Part #5088450-2
PULL LOOP, CUT LENGTH .44 IN

TE Part #CONSMA011-R178
SMA Jack 50 Ohm Cable Crimp

TE Part #2351453-1
SMINSA SW RLEV1.47N 5A/3A AC 3A DC SP

TE Part #2-1676913-5
YR1 0.1% 1K96

TE Part #85BSD005BG0-3BSC
PRESS,ISO,BACK-SIDE DIGITAL

TE Part #HPP816E056
TRICAN 24V HTD2800P1B11C6STD

TE Part #2118060-1
WLAN DUAL BAND Antenna Assembl

TE Part #1587940-2
CABLE SEAL RETAINER, SIZE B

TE Part #2029060-1
MINI UMNL LATCH LOCK

TE Part #9-1617814-0
PS10-1Y = 25A HP SSR

Documents

CAD Files
3D PDF



3D

Customer View Model

[ENG_CVM_CVM_1-111623-8_K.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-111623-8_K.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-111623-8_K.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Ribbon Cable Interconnect Solutions](#)

English

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

Agency Approvals

[Agency Approval Document](#)

English