


**443857-3**

✓ ACTIVE

**AMP**

TE Internal #: 443857-3

PCB Mount Receptacle, Vertical, Board-to-Board, 180 Position, 2.54 mm [.1 in] Centerline, Gold (Au), Through Hole - Solder, Signal, Brown, Package

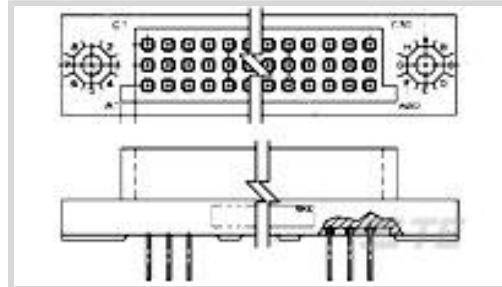[View on TE.com >](#)[Connectors > PCB Connectors > PCB Headers & Receptacles](#)**PCB Connector Assembly Type:** **PCB Mount Receptacle****PCB Mount Orientation:** **Vertical****Connector System:** **Board-to-Board****Number of Positions:** **180****Number of Rows:** **3**

## Features

### Product Type Features

PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

### Configuration Features

Number of Columns	60
Number of Loaded Positions	180
Board-to-Board Configuration	Perpendicular
PCB Mount Orientation	Vertical
Number of Positions	180
Number of Rows	3

### Body Features

Primary Product Color	Brown
-----------------------	-------

### Contact Features

Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Layout	Matrix
Contact Base Material	Beryllium Copper
PCB Contact Termination Area Plating Material	Tin-Lead

Contact Mating Area Plating Material	Gold (Au)
Contact Type	Socket
Contact Current Rating (Max)	3 A

#### Termination Features

Rectangular Termination Post & Tail Width	.51 mm[.02 in]
Rectangular Termination Post & Tail Thickness	.25 mm[.01 in]
Termination Post & Tail Length	4.57 mm[.18 in]
Termination Method to PCB	Through Hole - Solder

#### Mechanical Attachment

Mating Alignment Type	Polarized
PCB Mount Retention Type	Mounting Hole
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Mating Alignment	With

#### Housing Features

Housing Material	Polyphenylene Sulfide (PPS)
Centerline (Pitch)	2.54 mm[.1 in]

#### Dimensions

Row-to-Row Spacing	2.54 mm[.1 in]
Stack Height	15.24 mm[.6 in]
Connector Width	12.57 mm[.495 in]
PCB Thickness (Recommended)	2.44 mm[.096 in]
Connector Height	11.43 mm[.45 in]
Connector Length	153 mm[6.024 in]

#### Usage Conditions

Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
-----------------------------	----------------------------

#### Operation/Application

Circuit Application	Signal
---------------------	--------

#### Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

#### Packaging Features

Packaging Quantity	1
Packaging Method	Package

## Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2019 (197) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability


### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

## Customers Also Bought



TE Part #5650889-5  
ASSY, PIN, EUROCARD, TYPE R, LEAD-FREE

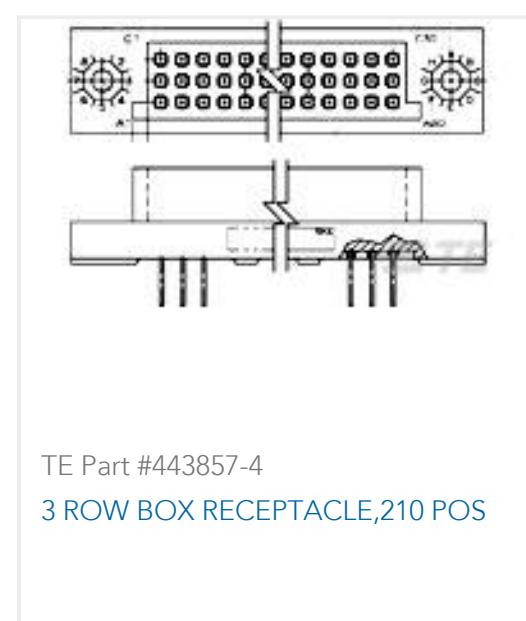

TE Part #443857-4  
3 ROW BOX RECEPTACLE, 210 POS



TE Part #1617087-9  
CW-9532 = C-10AMP HALF SIZE RE

## Documents

**Product Drawings****3 ROW BOX RECEPTACLE,180 POS**

English

**CAD Files****3D PDF**

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_443857-3\\_G\\_c-443857-3-g.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_443857-3\\_G\\_c-443857-3-g.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_443857-3\\_G\\_c-443857-3-g.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.**Product Specifications****Application Specification**

English