



深圳市首韩科技有限公司

SHENZHEN SHOUHAN TECHNOLOGY CO., LTD

Tel: 0755-27597601 Fax: 0755-27597491 Email: shouhan2@so-han.com

承 认 书

SPECIFICATION FOR APPROVAL

产品编码
material code:

产品名称 Project:

轻触开关

规格型号 Part No:

TS263065A 330gf (7.5)
MSM BD Membrane Switch

贵公司承认印 Approval signatures

料 号/Part No.	签 章/Signatures

日期 Date:


拟制/Drawn	李春风	
审核/Check	钟华华	
批准/Approved	罗孝金	

Small Type Tactile Switches STC Series

Switches

FEATURES

1. Ultra small size. (3.0×2.6mm)
2. Good feeling with the actuator.
3. High reliability with the small, thin, and dustproof design.

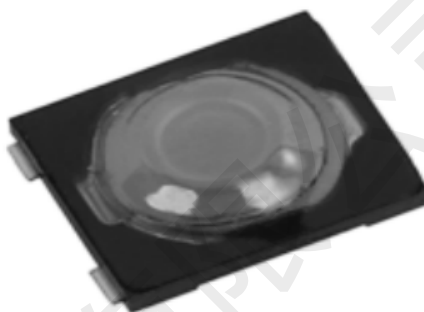

APPLICATIONS

Mobile Phones, Smartphones, Digital Cameras, Game Machines and etc.


SPECIFICATIONS

Electrical Characteristics	Rating (Resistive load)	DC15V, 20mA
	Contact Resistance	1Ω or less
	Insulation Resistance	10MΩ or more
	Withstand Voltage	1 minute at AC 100V
Life	TS263065A	100,000 times
	TS263065A	500,000 times




TYPE

Model Name Code	Model Name	Operating Force	Boss	Pcs/Reel
TS263065A	TS263065A	3.4N	Without	10,000


DIMENSIONS

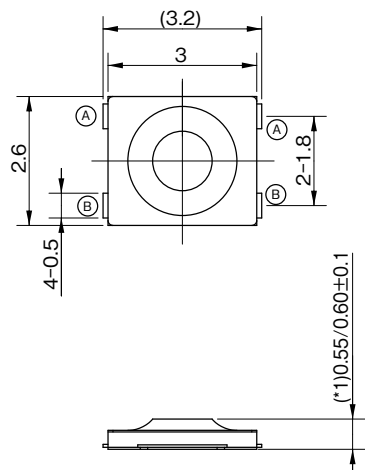

(*1) The switch height shall be measured with applying 5 gram load.



Reference land dimensions



Prohibited area of circuit patterns.

Solder thickness : 80 μ m

注意事项：开关为非防水结构，建议过一次回流焊，控制好锡膏量，以防助焊剂进入开关内部。