

## 1. Description

The AO3413A uses advanced trench technology to provide excellent  $R_{ps(on)}$ , low gate charge and operation with gate voltages as low as 1.8V. This device is suitable for use as a load switch or in PWM applications.


## 2. Features

- $V_{DS(V)} = -20V$
- $I_D = -3A (V_{GS} = -4.5V)$
- $R_{DS(ON)} < 66m\Omega (V_{GS} = -4.5V)$
- $R_{DS(ON)} < 80m\Omega (V_{GS} = -2.5V)$

## 3. Pinning information

Pin	Symbol	Description
1	G	GATE
2	S	SOURCE
3	D	DRAIN

### SOT-23

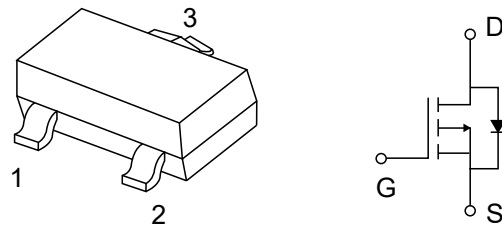

## 4. Absolute Maximum Ratings $T_A = 25^\circ C$ unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		$V_{DS}$	-20	V
Gate-Source Voltage		$V_{GS}$	$\pm 8$	V
Continuous Drain Current <sup>A</sup>	$T_A = 25^\circ C$	$I_D$	-3	A
	$T_A = 70^\circ C$		-2.4	
Pulsed Drain Current <sup>B</sup>		$I_{DM}$	-15	
Power Dissipation <sup>A</sup>	$T_A = 25^\circ C$	$P_D$	1.4	W
	$T_A = 70^\circ C$		0.9	
Junction and Storage Temperature Range		$T_J, T_{STG}$	-55 to 150	$^\circ C$

## 5. Thermal Characteristics

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient <sup>A</sup>	$t \leq 10s$	$R_{\theta JA}$	70	90	$^\circ C/W$
	Steady-State		100	125	$^\circ C/W$
Maximum Junction-to-Lead <sup>C</sup>	Steady-State	$R_{\theta JL}$	63	80	$^\circ C/W$



## 6. Electrical Characteristics (T<sub>J</sub>=25°C unless otherwise noted)


Parameter	Symbol	Conditions	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	I <sub>D</sub> =-250μA, V <sub>GS</sub> =0V	-20			V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =-20V, V <sub>GS</sub> =0V T <sub>J</sub> =55°C			-1	μA
					-5	
Gate-Body leakage current	I <sub>GSS</sub>	V <sub>DS</sub> =0V, V <sub>GS</sub> =±8V			±100	nA
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =-250μA	-0.4	-0.65	-1	V
On state drain current	I <sub>D(ON)</sub>	V <sub>GS</sub> =-4.5V, V <sub>DS</sub> =-5V	-15			A
Static Drain-Source On-Resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-3A			66	mΩ
		V <sub>GS</sub> =-2.5V, I <sub>D</sub> =-2.6A			80	mΩ
Forward Transconductance	g <sub>FS</sub>	V <sub>DS</sub> =-5V, I <sub>D</sub> =-3A		12		S
Diode Forward Voltage	V <sub>SD</sub>	I <sub>S</sub> =-1A, V <sub>GS</sub> =0V		-0.7	-1	V
Maximum Body-Diode Continuous Current	I <sub>S</sub>				-1.4	A
<b>DYNAMIC PARAMETERS</b>						
Input Capacitance	C <sub>iss</sub>	V <sub>GS</sub> =0V, V <sub>DS</sub> =-10V, f=1MHz		560	745	pF
Output Capacitance	C <sub>oss</sub>			80		pF
Reverse Transfer Capacitance	C <sub>rss</sub>			70		pF
Gate resistance	R <sub>g</sub>	V <sub>GS</sub> =0V, V <sub>DS</sub> =0V, f=1MHz		15	23	Ω
<b>SWITCHING PARAMETERS</b>						
Total Gate Charge	Q <sub>g</sub>	V <sub>GS</sub> =-4.5V, V <sub>DS</sub> =-10V I <sub>D</sub> =-3A		8.5	11	nC
Gate Source Charge	Q <sub>gs</sub>			1.2		nC
Gate Drain Charge	Q <sub>gd</sub>			2.1		nC
Turn-On DelayTime	t <sub>D(on)</sub>	V <sub>GS</sub> =4.5V, V <sub>DS</sub> =-10V R <sub>L</sub> =3.3Ω, R <sub>GEN</sub> =6Ω		7.2		ns
Turn-On Rise Time	t <sub>r</sub>			36		ns
Turn-Off DelayTime	t <sub>D(off)</sub>			53		ns
Turn-Off Fall Time	t <sub>f</sub>			56		ns
Body Diode Reverse Recovery Time	t <sub>rr</sub>	I <sub>F</sub> =-3A, dI/dt=100A/μs		37	49	ns
Body Diode Reverse Recovery Charge	Q <sub>rr</sub>	I <sub>F</sub> =-3A, dI/dt=100A/μs		27		nC



- A. The value of  $R_{\theta JA}$  is measured with the device mounted on 1 in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A = 25^\circ\text{C}$ . The value in any given application depends on the user's specific board design. The current rating is based on the  $t \leq 10\text{s}$  thermal resistance rating.
- B. Repetitive rating, pulse width limited by junction temperature.
- C. The  $R_{\theta JA}$  is the sum of the thermal impedance from junction to lead  $R_{\theta JL}$  and lead to ambient.
- D. The static characteristics in Figures 1 to 6 are obtained using 300 $\mu\text{s}$  pulse width, duty cycle 0.5% max.
- E. These tests are performed with the device mounted on 1 in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A = 25^\circ\text{C}$ . The SOA curve provides a single pulse rating.




## 7.1 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

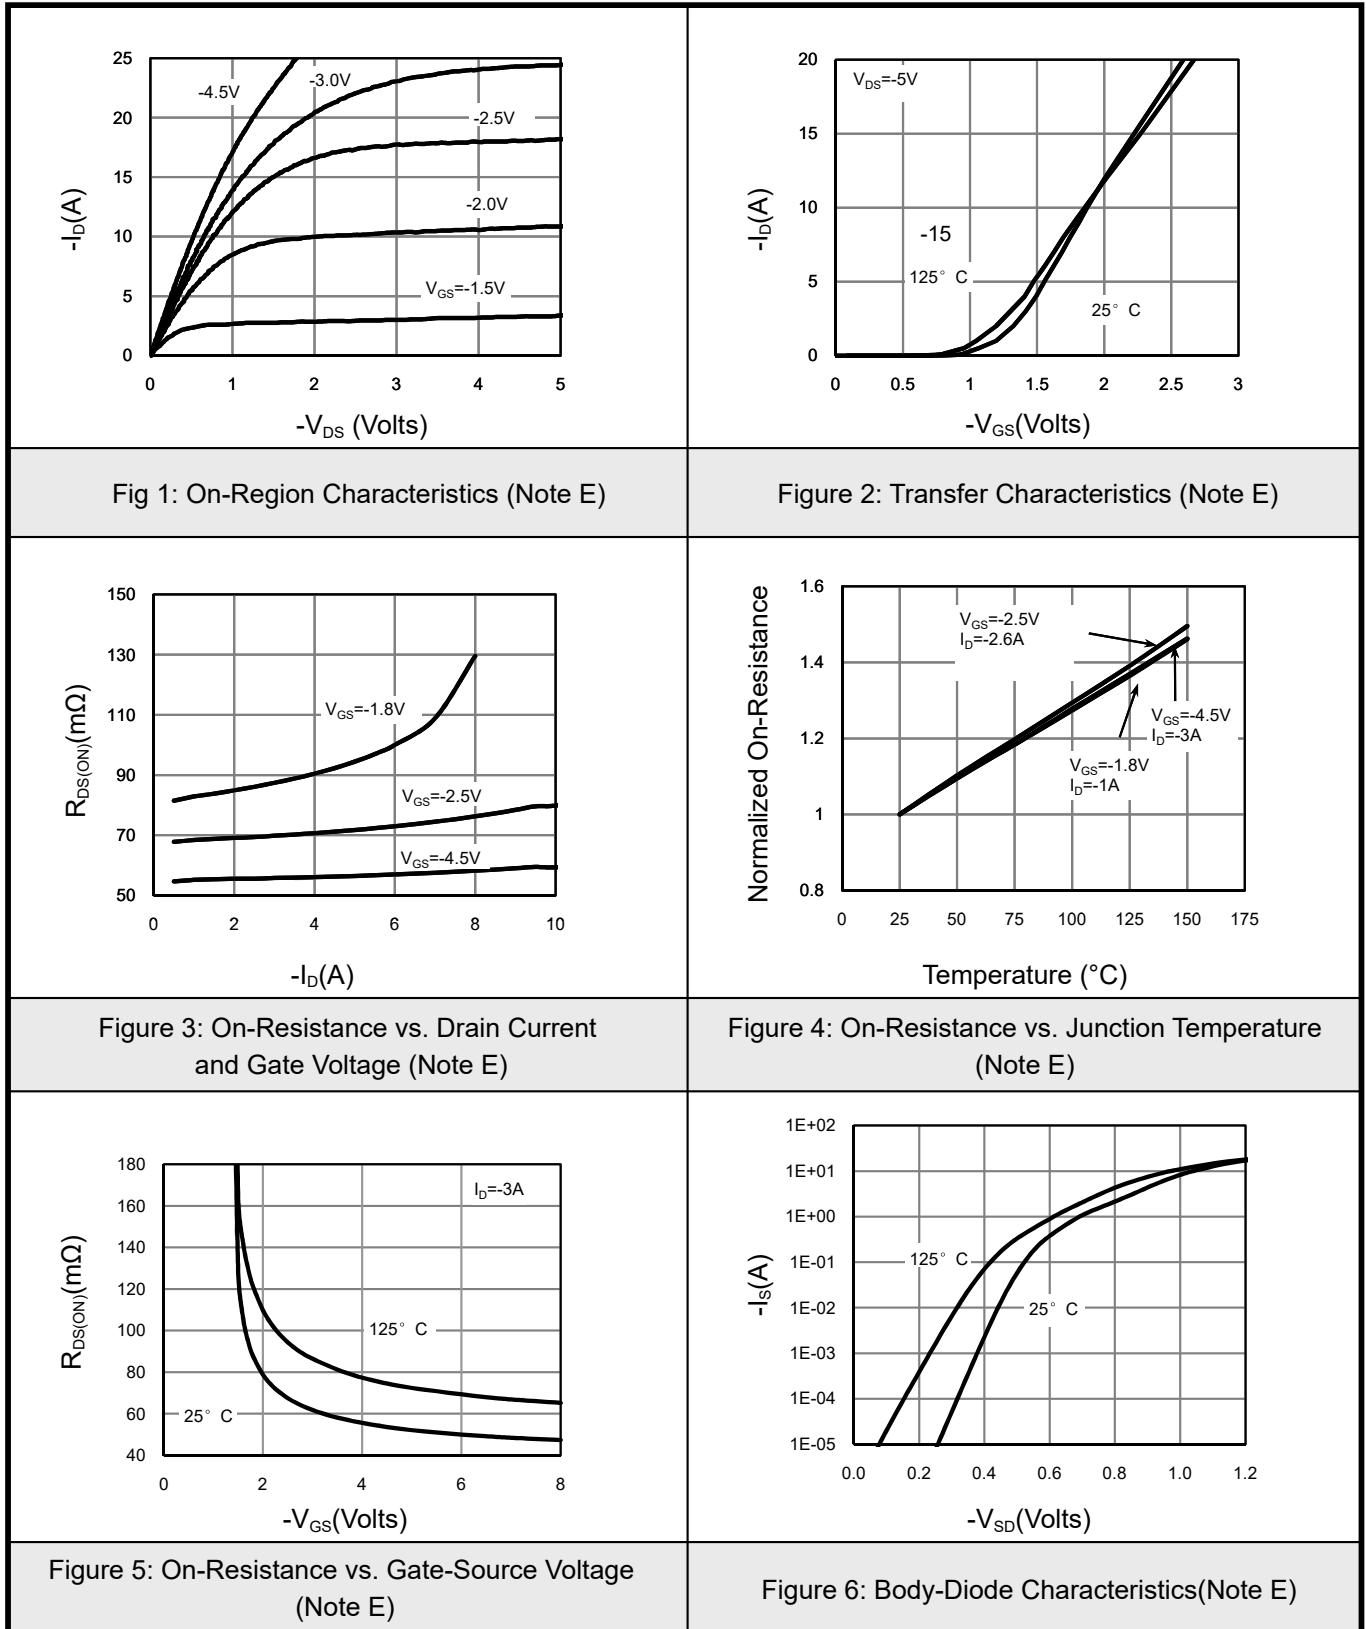





## 7.2 TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


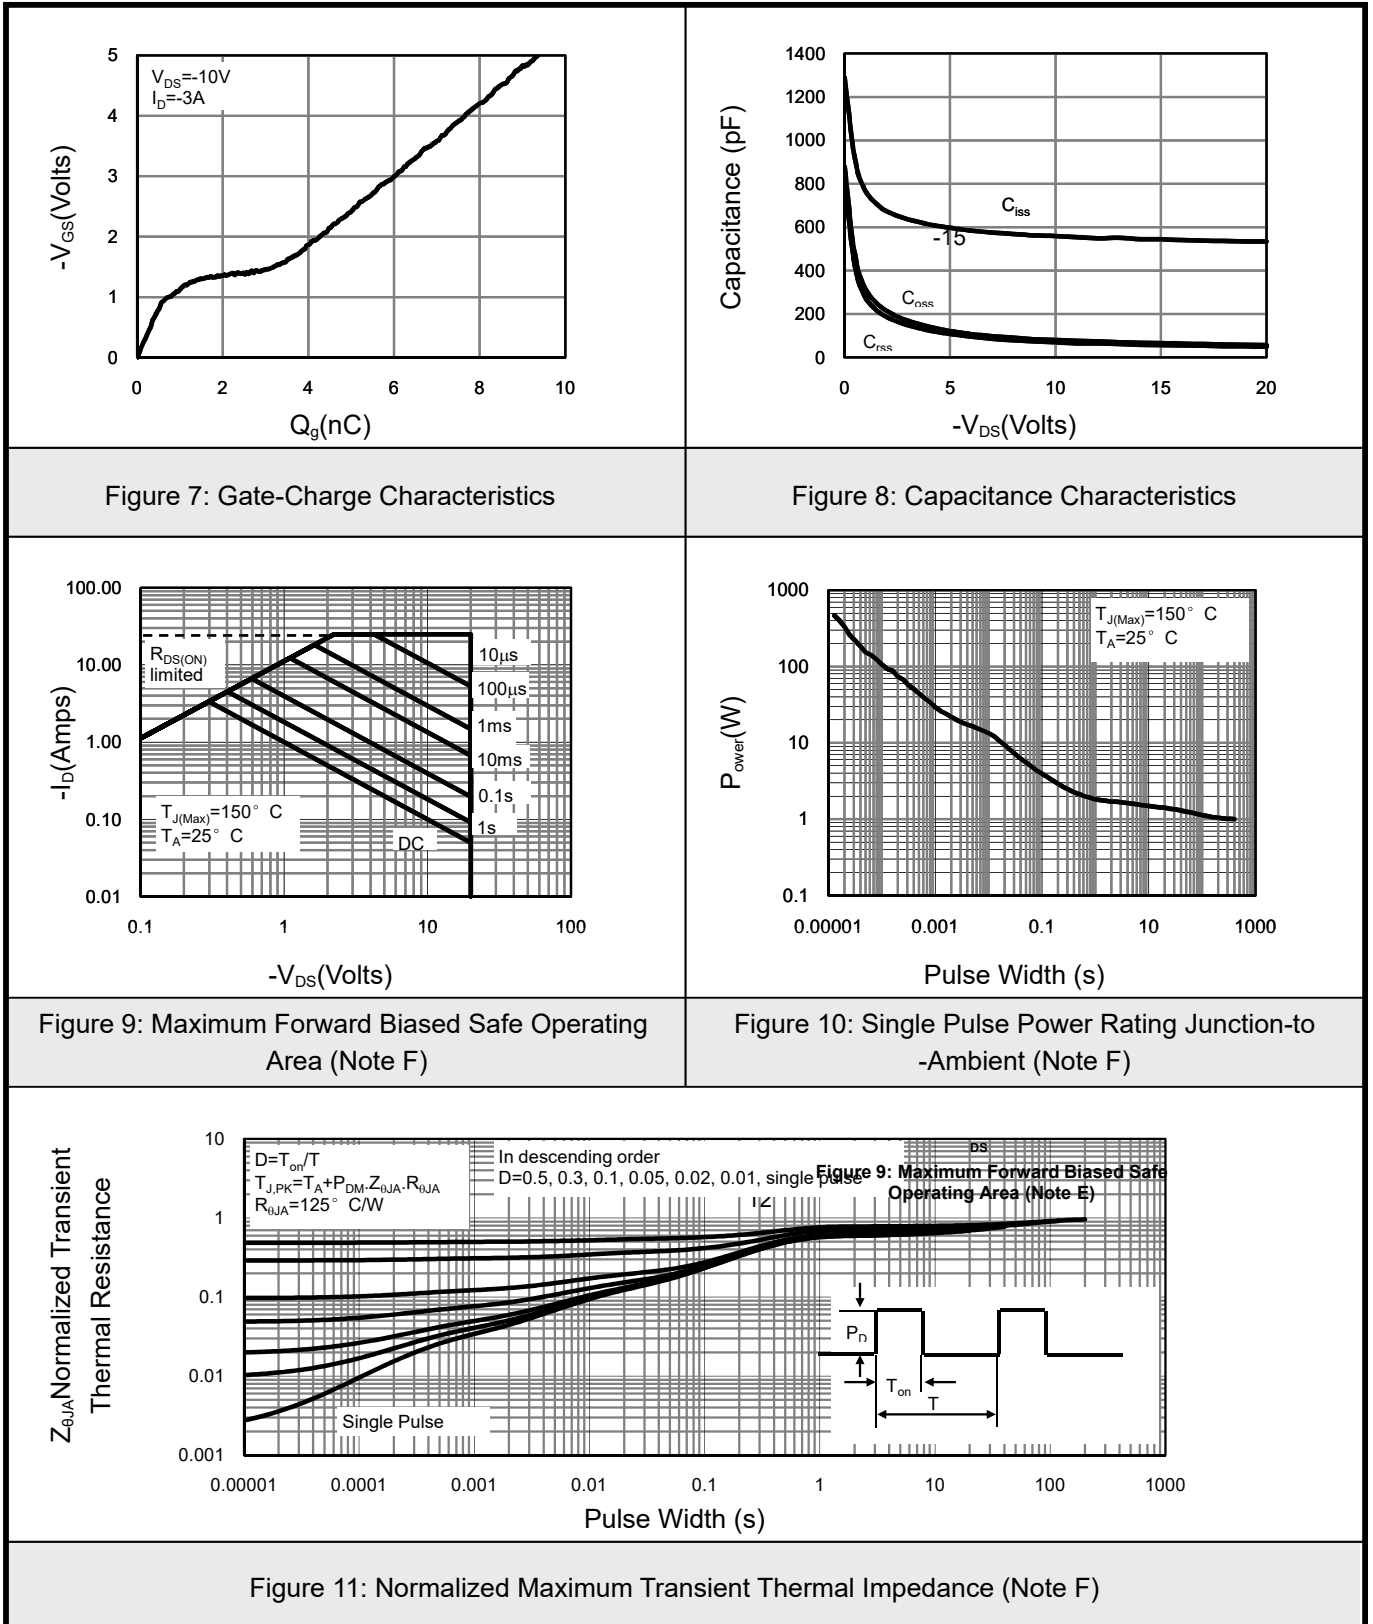






## Gate Charge Test Circuit & Waveform

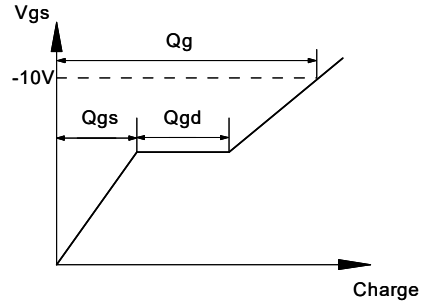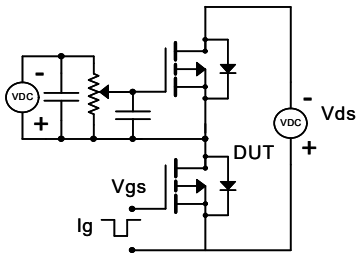

## Resistive Switching Test Circuit & Waveforms

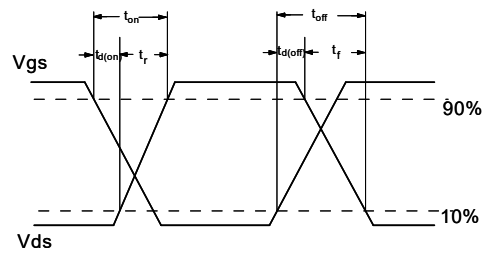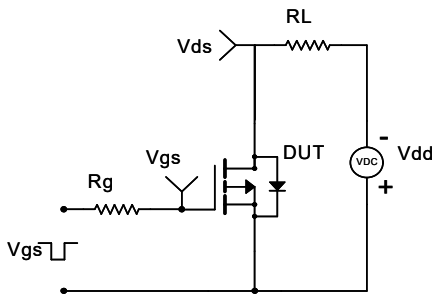


## Diode Recovery Test Circuit & Waveforms

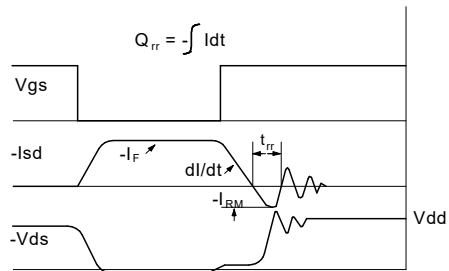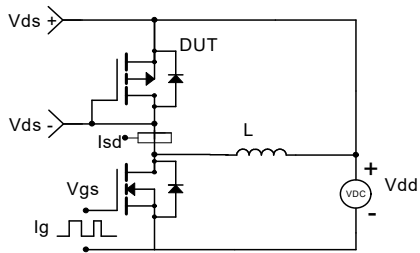



## 8.SOT-23 Package Outline Dimensions

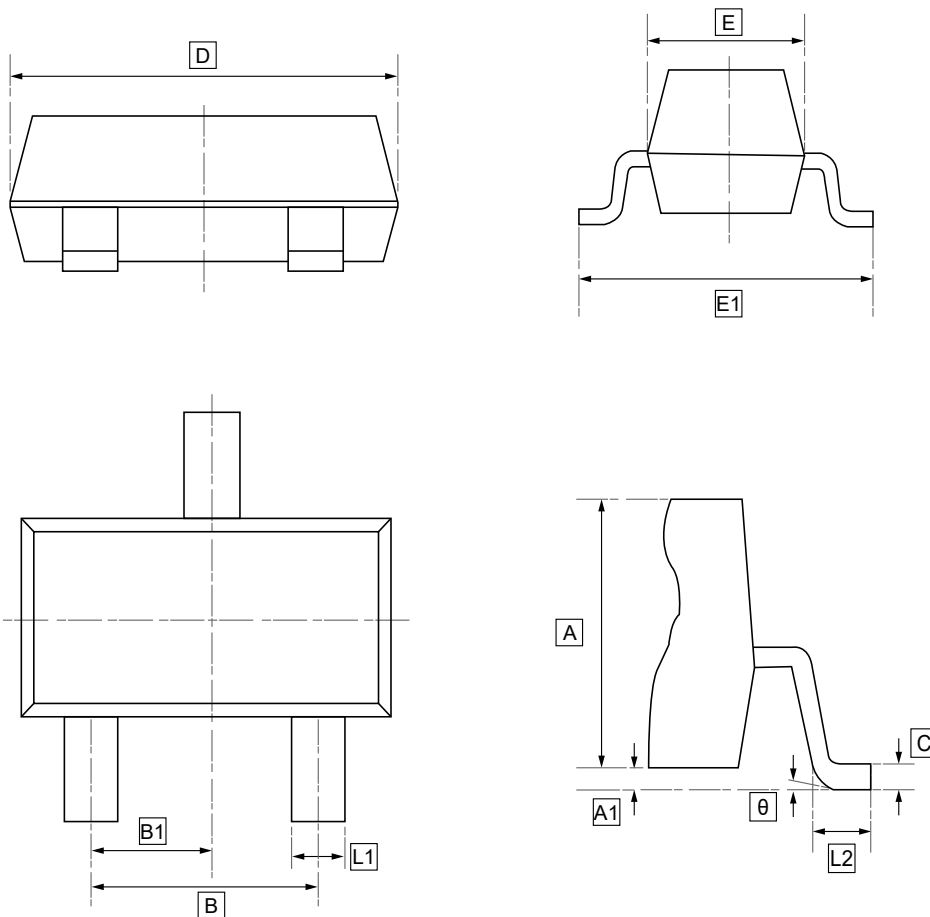


### DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	L1	L2	C	D	E	E1	B	B1	θ
Min	1.050	0.000	0.300	0.350	0.100	2.820	1.500	2.700	1.800	0.950	0°
Max	1.150	0.100	0.500	0.550	0.200	3.020	1.700	2.900	2.000	TYP	8°



## 9. Ordering information



WW: Batch Code

Order Code	Package	Base QTY	Delivery Mode
UMW AO3413A	SOT-23	3000	Tape and reel





## **10.Disclaimer**

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.