


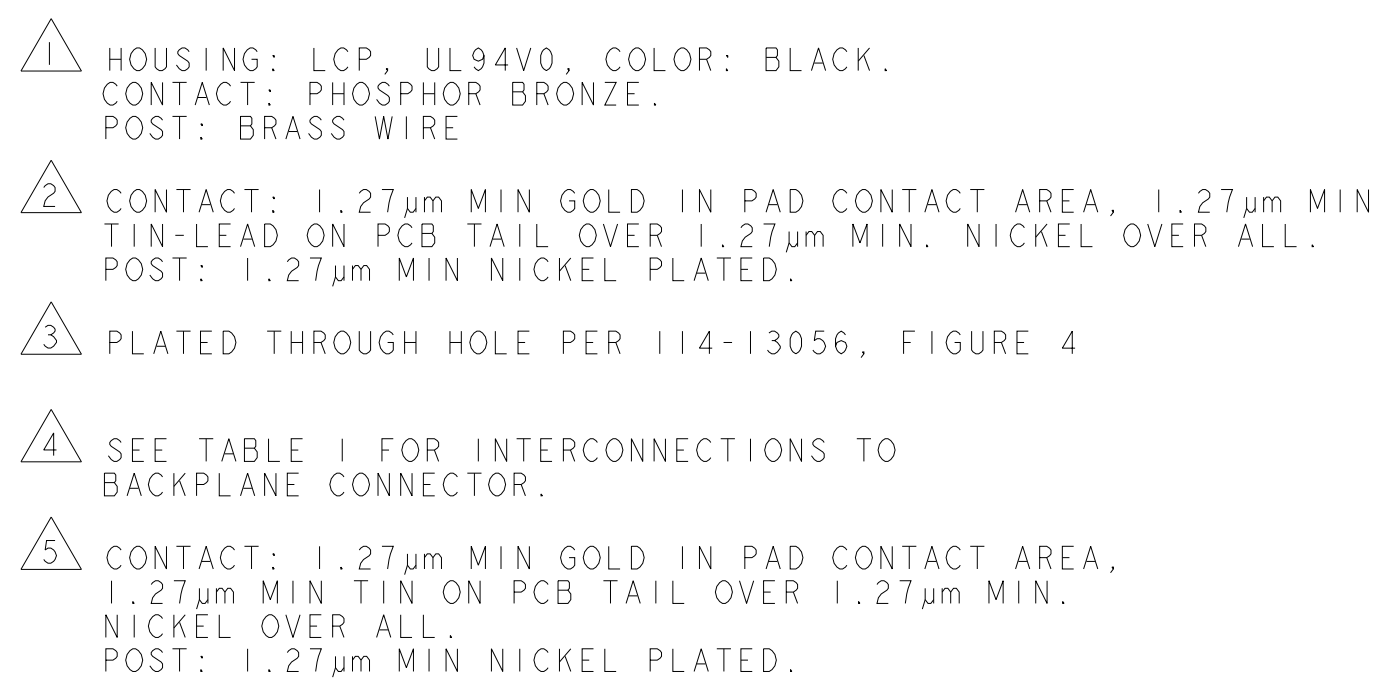

TYPICAL INTERCONNECTIONS FOR COLUMN (WAFER): 8		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	bx	cx
	cx	dx
SIGNAL PAIR	ex	gx
	fx	hx
GROUND	ax, dx, gx, (ALL COMMONED)	ax, bx, ex, fx, ix

TYPICAL INTERCONNECTIONS FOR COLUMN (WAFER): 7		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	ax	ax
	bx	bx
SIGNAL PAIR	dx	ex
	ex	fx
SIGNAL	gx	ix
GROUND	cx, fx (ALL COMMONED)	cx, dx, gx, hx

CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL	ax	bx
SIGNAL	bx	cx
SIGNAL	dx	ex
SIGNAL	fx	gx
SIGNAL	gx	hx
GROUND	cx, ex, (ALL COMMON)	ax, dx, fx, ix

CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
POWER	a x, b x, c x	a x, b x, c x, d x
POWER	e x, f x, g x	f x, g x, h x, i x
NOT CONNECTED	d x	e x

NOTE: "x" DESIGNATES THE COLUMN NUMBER

	2287838-2
	2287838-1
PLATING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C. THOMAS 9-21-14 CHK D. HOANG 9-21-14 APP'D D. HOANG 9-21-14		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±1°0'		NAME RIGHT-ANGLE PLUG ASSEMBLY, 7 ROW HALF LEFT END, 20.3mm, MULTIGIG RT 2-R, DAUGHTERCARD CONNECTOR, VITA 46	
		PRODUCT SPEC 108-2072 APPLICATION SPEC 114-13056		SIZE CAGE CODE DRAWING NO A100779C=2287838	
MATERIAL 		FINISH SEE TABLE Customer Drawing		RESTRICTED TO - SCALE 5:1 SHEET 1 OF 1 REV A	