
# SECURE LIGHTING

### **DESIGNED TO MEET REQUIREMENTS OF MIL-L-3661B**

Used for secure low light level nighttime operation and normal daytime operation.


### **Features**

- These indicators are designed to meet the Secure Lighting Statement of Work Priorities instituted by CECOM (Communications Electronics Command), Div. of the U.S. Army.
- 1. A maximum of .5% of the total energy emitted between 350 nanometers and 930 nanometers shall be above 700 nanometers.
- 2. Intensity reduction is accomplished by a complete blackout mechanical dimmer.
- 3. A narrow radiation pattern is maintained by using a flush mounted flat lens.



quality material produce a lens cap design that eliminates light leaks.

### **MOUNT IN 15/32" CLEARANCE HOLE**



1 1100/4	007 0400 00	E00
I H89/1	367-8430-09-	-5113

### **Cap Part Numbers COMPLETE ASSEMBLY PART NUMBERS** Blue-Green 241-0001 241-8430-0001-503 Green 241-0002 241-8430-0002-503 Yellow 241-8430-0003-503

### T-1% Midget Flange Base Manufacturer's Ratings

Lamp No.	Volts	Amperes	Candlepower	Hours
327°	28.0	.04	.34	4,000
328°	6.0	.20	.63	1,000





241-8430-0001-503

### **MATERIALS AND FINISHES**

- Mounting Bushing: Aluminum, black anodize finish
- Internal-tooth Lockwasher and Mounting Nut: Steel, cadmium plated with yellow iridescent chromate finish
- Terminals: Brass, hot-tinned with elongated slots

**BASE** PART NUMBER

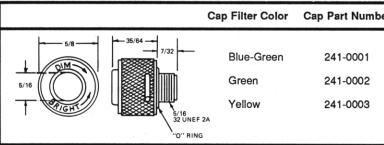



## Manufacturer's Ratings

Lamp No.	Volts	Watts	Amperes	Candlepower	Hours
		4.7		3.5	500
316	6.0	4.2	0.70	3.4	500






### **MATERIALS AND FINISHES**

- Mounting Bushing and Lens Holder: Brass, black nickel finish
- Mounting Nut: Brass, white nickel finish
- Internal-tooth Lockwasher: Phosphor bronze, white nickel finish

Terminals:solder — Brass, hot-tinned with elongated slot

BASE PART NUMBER



**MOUNT IN 11/16" CLEARANCE HOLE** 

Solder terminals

LH76/3 373-0410-01-203

	Cap Filter Color	Cap Part Numbers	COMPLETE ASSEMBLY PART NU	MBERS
13/16 21/32 3/ 15/32 Right	Blue-Green  Green  Yellow  9/16 27 NS2	242-0001 242-0002 242-0003	242-0410-0001-203 242-0410-0002-203 242-0410-0003-203	