



DSF1A THRU DSF1J

Reverse Voltage - 50 to 600 Volts Forward Current - 1.0 Ampere


SURFACE MOUNT SUPER FAST RECTIFIER

Features

- ◆ Glass passivated device
- ◆ Ideal for surface mouted applications
- ◆ Low reverse leakage
- ◆ Metallurgically bonded construction
- ◆ High temperature soldering guaranteed:
250°C/10 seconds,0.375"(9.5mm) lead length,
5 lbs. (2.3kg) tension

Mechanical Data

Case : JEDEC SOD-123FL molded plastic body
Terminals : Solderable per MIL-STD-750,Method 2026
Polarity : Polarity symbol marking on body
Mounting Position : Any
Weight : 0.00053 ounce, 0.015grams

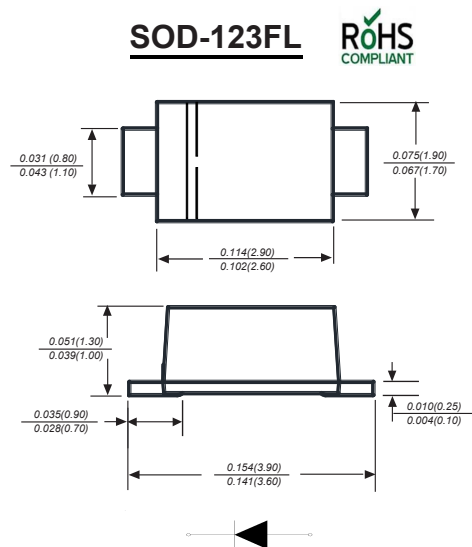

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

Parameter	SYMBOLS	DSF1A	DSF1B	DSF1C	DSF1D	DSF1E	DSF1G	DSF1J	UNITS
Marking Code		E1A	E1B	E1C	E1D	E1E	E1G	E1J	
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum average forward rectified current at TL(see fig.1)	I _(AV)	1.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30							A
Maximum instantaneous forward voltage at 1.0A	V _F	1				1.25		1.68	V
Maximum DC reverse current TA=25℃ at rated DC blocking voltage TA=125℃	I _R	5 100							μA
Typical junction capacitance (NOTE 1)	C _J	15							pF
Maximum Reverse Recovery Time (NOTE 2)	t _{rr}	35							ns
Typical thermal resistance (NOTE 3)	RθJA	85							℃/W
Operating junction temperature range	T _J	-55 to +150							℃
Storage temperature range	T _{STG}	-55 to +150							℃

Note: 1.Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3.PCB mounted on 2.0*2.0" (5.0*5.0cm) copper pad area.




DSF1A THRU DSF1J

Reverse Voltage - 50 to 600 Volts Forward Current - 1.0 Ampere

Typical Characteristics

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

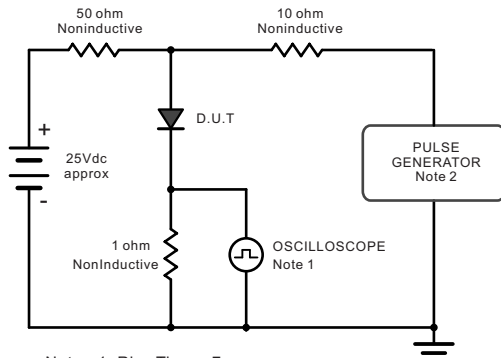

Note: 1. Rise Time = 7ns, max.
Input Impedance = 1megohm, 22pF.
2. Rise Time = 10ns, max.
Source Impedance = 50 ohms.

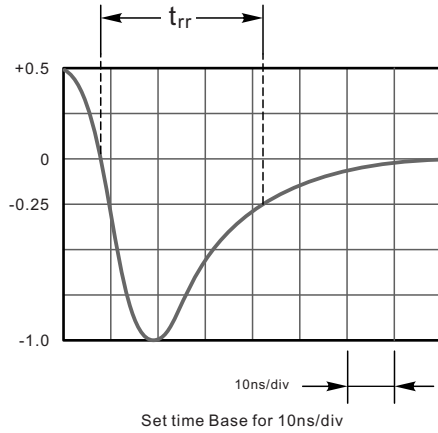


Fig.2 Maximum Average Forward Current Rating

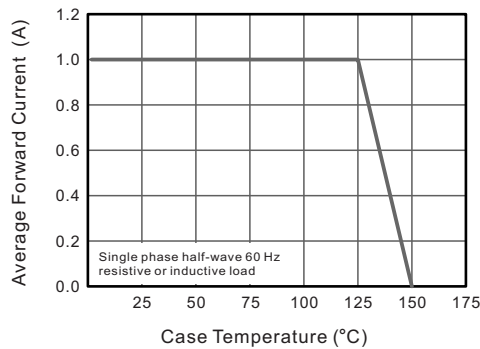


Fig.3 Typical Reverse Characteristics

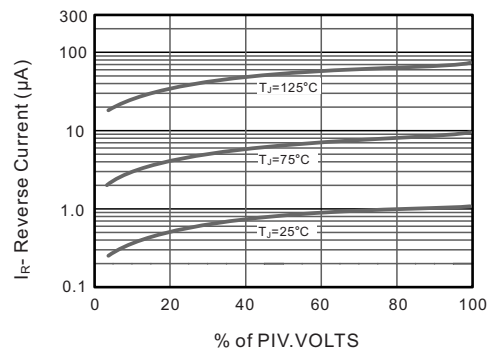


Fig.4 Typical Forward Characteristics

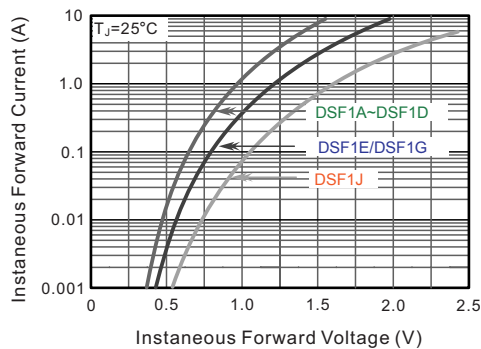


Fig.5 Typical Junction Capacitance


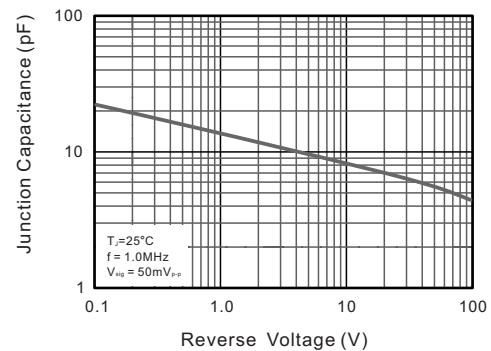


Fig.6 Maximum Non-Repetitive Peak Forward Surge Current




The curve above is for reference only.

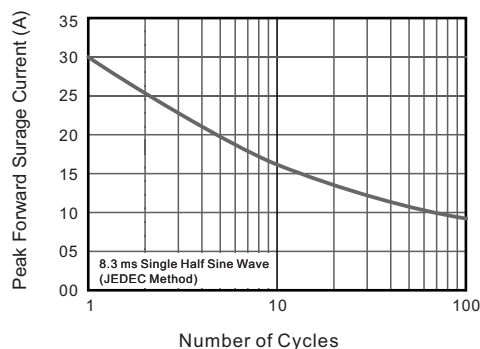

DSF1A THRU DSF1J

Reverse Voltage - 50 to 600 Volts Forward Current - 1.0 Ampere

Packing information

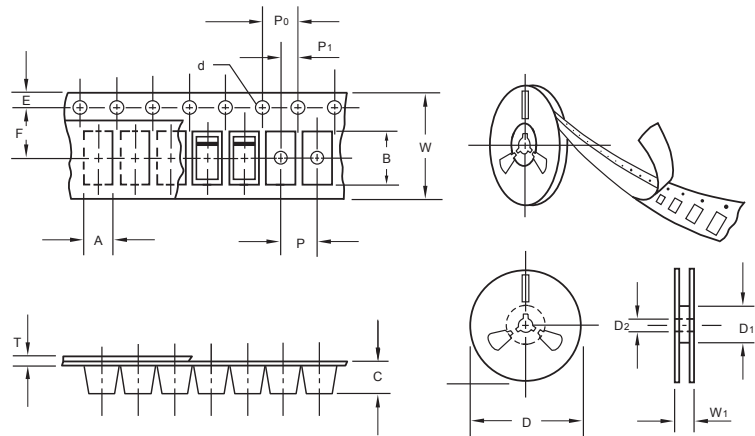

unit:mm


Item	Symbol	Tolerance	SOD-123FL
Carrier width	A	0.1	2.1
Carrier length	B	0.1	4.0
Carrier depth	C	0.1	1.60
Sprocket hole	d	0.05	1.55
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	50.0
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.25
Tape width	W	0.3	8.15
Reel width	W1	1.0	10.5

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-123FL	7"	3,000	4.0	45,000	210*208*203	178	430*430*235	180,000	9.0

Suggested Pad Layout

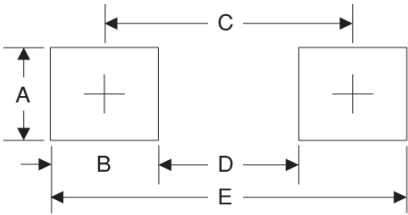

Symbol	Unit (mm)	Unit (inch)
A	1.2	0.047
B	1.2	0.047
C	3.2	0.126
D	2	0.079
E	4.4	0.173