




RoHS

0.10 ⑦


REV.	ECN.#	DESCRIPTION	NAME	DATE
A0		NEW RELEASE	TPY	2019.07.25
A1		外壳印字位置变更	HT	2019.08.14
A2		依实物变更尺寸	XHW	2021.04.14
A3		旧模老化, 重开新模	lhp.liu	2024.04.02

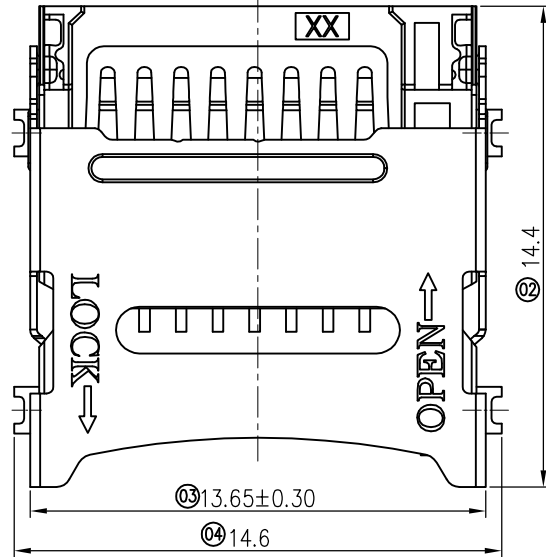

LOCK

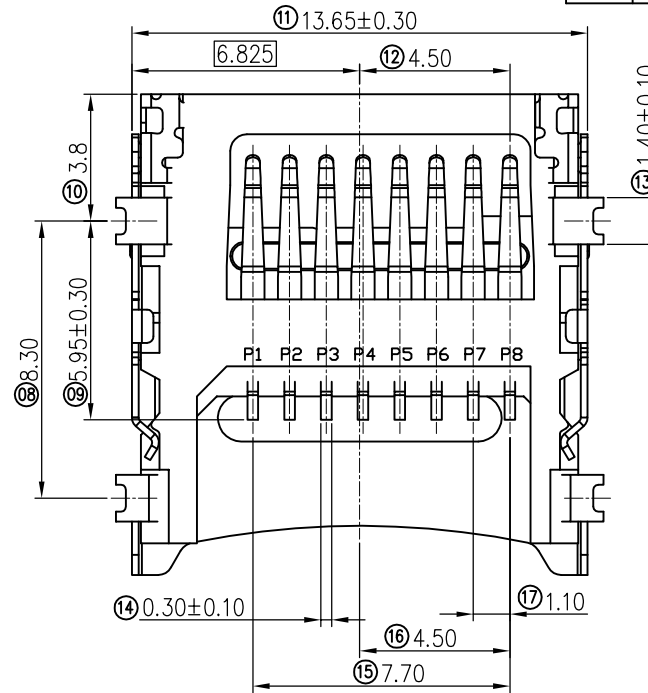

LOCK



OPEN

NOTES:

1. MATERIAL:

1.1 HOUSING: LCP UL94V-0; COLOR: BLACK

1.2 TERMINAL: C2680

1.3 SHELL: SUS201

2. FINISH:

2.1 TERMINAL: G/F PLATED ON CONTACT AREA;

Tin 50u". PLATED ON SOLDER AREA;

Ni 20u" MIN. UNDERPLATED OVERALL

2.2 SHELL: CLEANING

3. ELECTRICAL SPECIFICATION:

3.1 RATED CURRENT: 0.5A;

3.2 CONTACT RESISTANCE: 100mΩ MAX.

3.3 INSULATION RESISTANCE: 1000MΩ MIN AT 250V DC.

3.4 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.

4. ENVIRONMENTAL SPECIFICATION:



4.1 OPERATING CONDITION: TEMPERATURE -40°C~+85°C;

HUMIDITY 80% R.H MAX

4.2 SALT SPRAY: 24H(Contact Area)


5. SOLDER ABILITY: 245±5°C, 5±0.5s

6. IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

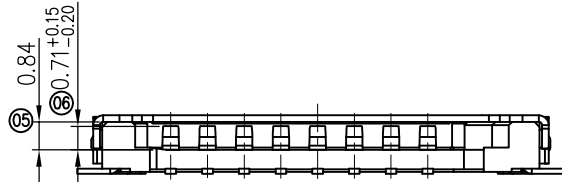

T-FLASH CARD

PIN NO.	PIN Assignmeng.
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	Uss2
PIN7	DAT0
PIN8	DAT1

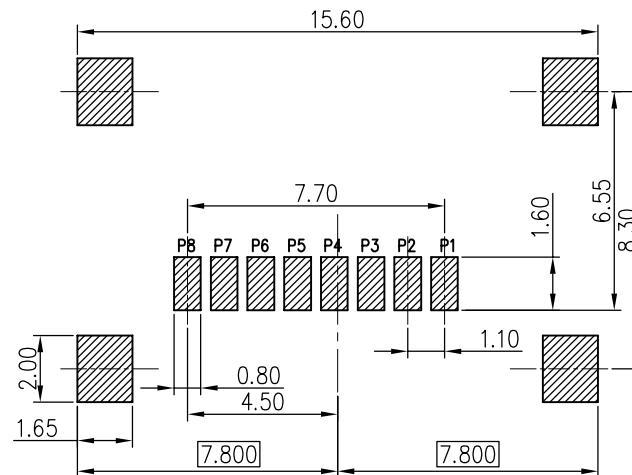

P.C.B LAYOUT


PART NO.	PLATING
404400241-A	G/F
404420241-A	3u"

MILLIMETERS	INCH
X* ±2"	X* ±2"
X ±0.30	.X ±0.012
XX ±0.20	.XX ±0.008
XXX ±0.10	.XXX ±0.004
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co.,Ltd	
COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co.,Ltd	

东莞市金比莱五金塑胶科技有限公司
DONGGUAN JBL TECH CO., LTD

TITLE	T-FLASH 1.80H 掀盖式	DR		
PART NO.	404400241-A	CHKD		
PRO J.	PAGE 1/2	UNITS	mm	APPD
SIZE	A4	SCALE	1:1	DIS NO.

RoHS

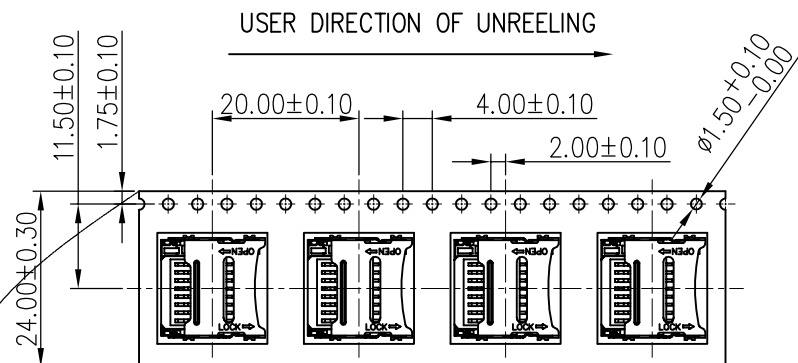

COVER TAPE PEELING ANGLE: 165°~180°


PEELING FORCE: 20~130g

CARRIER TAPE

USER DIRECTION OF UNREELING

DETAIL B


纸盘

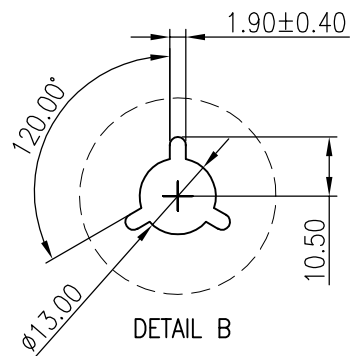


NOTES

1. NUMBER OF CONNECTORS: 1200PCS/REEL

2. LEAD TAPE LENGTH

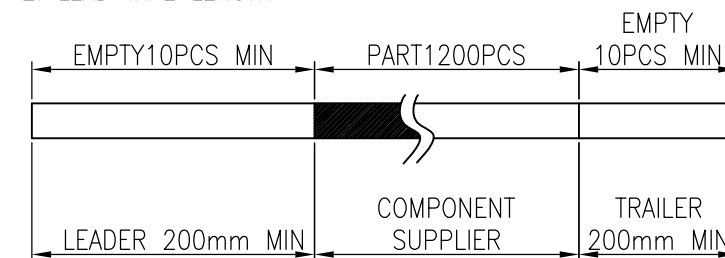

3. QUANTITY: 12000PCS/CARTON

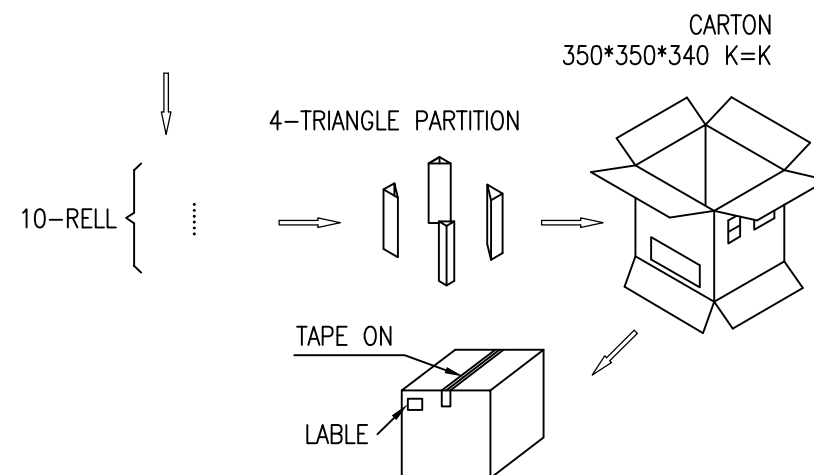

MILLIMETERS	INCH
X.* ±2*	X.* ±2*
X ±0.30	.X ±0.012
XX ±0.20	.XX ±0.008
XXX ±0.10	.XXX ±0.004
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co.,Ltd COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co.,Ltd	

东莞市金比莱五金塑胶科技有限公司
DONGGUAN JBL TECH CO., LTD

TITLE	T-FLASH 1.80H 掀盖式	DR		
PART NO.	404400241-A	CHKD		
PRO J.	PAGE 2/2	UNITS mm	APPD	
SIZE	A4	SCALE 1:1	DIS NO.	